

collaborative Protection Profile for Hardcopy Devices

Version 2.0, 31 July 2026

Acknowledgements

This collaborative Protection Profile (cPP) was developed by the Hardcopy Devices international Technical Community (iTC) also known as HCD-iTC with representatives from industry, Government agencies, Common Criteria Test Laboratories, and members of academia.

Revision History

Table 1. Revision history

Version	Date	Description
1.0	31 October 2022	Initial release for use
1.0e	4 March 2024	Errata version
1.1	29 December 2025	CC:2022 update
2.0	31 July 2026	Released for use

Table of Contents

Acknowledgements	1
Revision History	1
Preface	8
Objectives of Document	8
Scope of Document	8
Intended Readership	8
1. PP Introduction	10
1.1. PP Reference Identification	10
1.2. TOE Overview	10
1.3. TOE Design	10
1.3.1. Boundary of the TOE	10
1.3.2. Operational Environment	10
1.4. TOE Use Case	11
1.4.1. USE CASE 1: Required Use Cases	11
1.4.2. USE CASE 2: Conditionally Mandatory Use Cases	12
1.4.3. USE CASE 3: Optional Use Cases	12
1.4.4. Major Security Functions of the HCD	13
2. CC Conformance Claims	15
2.1. Package Claims	15
2.2. Conformance to this Protection Profile	15
3. Security Problem Definition	16
3.1. Users	16
3.2. Assets	16
3.3. Threats	17
3.3.1. Unauthorized Access to User Data	17
3.3.2. Unauthorized Access to TSF Data	17
3.3.3. Installation of Unauthorized Firmware/Software	17
3.3.4. Network Communication Attacks	18
3.3.5. Malfunction	18
3.3.6. Weak Cryptography	18
3.4. Assumptions	18
3.4.1. Physical Security	18
3.4.2. Network Security	18
3.4.3. Administrator Trust	19
3.4.4. User Training	19
3.5. Organizational Security Policies	19
3.5.1. User Authorization	19
3.5.2. Auditing	19

3.5.3. Protected Communications	19
3.5.4. Storage Encryption	19
3.5.5. PSTN Fax-Network Separation (conditionally mandatory)	20
3.5.6. Image Overwrite (optional)	20
3.5.7. Wipe Data (optional)	20
3.5.8. Root of Trust	20
4. Security Objectives	21
4.1. Security Objectives for the TOE	21
4.1.1. User Authorization	21
4.1.2. User Identification and Authentication	21
4.1.3. Access Control	21
4.1.4. Administrator Roles	22
4.1.5. Firmware/Software Update Verification	22
4.1.6. Self-test	22
4.1.7. Communications Protection	22
4.1.8. Auditing	23
4.1.9. Storage Encryption	23
4.1.10. Protection of Key Material	23
4.1.11. PSTN Fax-Network Separation (conditionally mandatory)	23
4.1.12. Image Overwrite (optional)	23
4.1.13. Wipe Data (optional)	24
4.1.14. Authentication Failures (conditionally mandatory)	24
4.1.15. Firmware Integrity	24
4.1.16. Strong Cryptography	24
4.2. Security Objectives for the Operational Environment	24
4.2.1. Physical Protection	24
4.2.2. Network Protection	25
4.2.3. Trusted Administrators	25
4.2.4. Trained Users	25
4.2.5. Trained Administrators	25
4.3. Security Objectives Rationale	25
5. Security Functional Requirements	28
5.1. Conventions	28
5.2. Security Audit (FAU)	28
5.2.1. FAU_GEN.1 Audit data generation	28
5.2.2. FAU_GEN.2 User identity association	29
5.2.3. FAU_SAR.1 Audit review	30
5.2.4. FAU_SAR.2 Restricted audit review	30
5.2.5. FAU_STG.1 Audit data storage location	30
5.2.6. FAU_STG.2 Protected audit data storage	30
5.2.7. FAU_STG.5 Prevention of audit data loss	31

5.3. Cryptographic Support (FCS)	31
5.3.1. FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)	31
5.3.2. FCS_CKM.1/SKG Cryptographic Key Generation (Symmetric Keys)	32
5.3.3. FCS_CKM.2 Cryptographic Key Establishment	33
5.3.4. FCS_CKM.6 Timing and event of cryptographic key destruction	34
5.3.5. FCS_COP.1/DataEncryption Cryptographic Operation (Data Encryption/Decryption)	36
5.3.6. FCS_COP.1/SigGen Cryptographic Operation (Signature Generation and Verification) ...	39
5.3.7. FCS_COP.1/Hash Cryptographic Operation (Hash Algorithm)	41
5.3.8. FCS_RBG_EXT.1 Random Bit Generation	41
5.4. User Data Protection (FDP)	42
5.4.1. FDP_ACC.1 Subset access control	42
5.4.2. FDP_ACF.1 Security attribute based access control	42
5.5. Identification and Authentication (FIA)	47
5.5.1. FIA_ATD.1 User attribute definition	47
5.5.2. FIA_PMG_EXT.1 Extended: Password Management	47
5.5.3. FIA_UAU.1 Timing of authentication	47
5.5.4. FIA_UAU.7 Protected authentication feedback	48
5.5.5. FIA_UID.1 Timing of identification	48
5.5.6. FIA_USB.1 User-subject binding	49
5.6. Security Management (FMT)	49
5.6.1. FMT_MOF.1 Management of security functions behavior	49
5.6.2. FMT_MSA.1 Management of security attributes	49
5.6.3. FMT_MSA.3 Static attribute initialization	50
5.6.4. FMT_MTD.1 Management of TSF data	50
5.6.5. FMT_SMF.1 Specification of Management Functions	51
5.6.6. FMT_SMR.1 Security roles	52
5.7. Privacy (FPR)	52
5.8. Protection of the TSF (FPT)	52
5.8.1. FPT_SBT_EXT.1 Extended: Secure Boot	52
5.8.2. FPT_SKP_EXT.1 Extended: Protection of TSF Data	53
5.8.3. FPT_STM.1 Reliable time stamps	54
5.8.4. FPT_TST_EXT.1 Extended: TSF testing	54
5.8.5. FPT_TUD_EXT.1 Extended: Trusted Update	54
5.9. Resource Utilization (FRU)	55
5.10. TOE Access (FTA)	55
5.10.1. FTA_SSL.3 TSF-initiated termination	55
5.11. Trusted Paths/Channels (FTP)	55
5.11.1. FTP_ITC.1 Inter-TSF trusted channel	55
5.11.2. FTP_TRP.1/Admin Trusted path (for Administrators)	57
6. Security Assurance Requirements	59
6.1. ASE: Security Target	59

6.2. ADV: Development	60
6.2.1. Basic Functional Specification (ADV_FSP.1)	60
6.3. AGD: Guidance Documentation	60
6.3.1. Operational User Guidance (AGD_OPE.1)	61
6.3.2. Preparative Procedures (AGD_PRE.1)	61
6.4. Class ALC: Life-cycle Support	61
6.4.1. Labelling of the TOE (ALC_CMC.1)	61
6.4.2. TOE CM Coverage (ALC_CMS.1)	61
6.5. Class ATE: Tests	61
6.5.1. Independent Testing – Conformance (ATE_IND.1)	61
6.6. Class AVA: Vulnerability Assessment	62
6.6.1. Vulnerability Survey (AVA_VAN.1)	62
Appendix A: Selection-Based Requirements	63
A.1. Audit Events for Selection-Based SFRs	63
A.2. Confidential Data on Nonvolatile Storage Devices	63
A.2.1. FCS_COP.1/StorageEncryption Cryptographic operation (Data Encryption/Decryption) ..	63
A.2.2. FCS_COP.1/KeyEncap Cryptographic operation (Key Encapsulation)	66
A.2.3. FCS_COP.1/KeyWrap Cryptographic operation (Key Wrapping)	67
A.2.4. FCS_COP.1/KeyEnc Cryptographic operation (Key Encryption)	68
A.2.5. FCS_COP.1/KeyTransport Cryptographic operation (Key Transport)	69
A.2.6. FCS_SMC_EXT.1 Extended: Submask Combining	69
A.3. Protected Communications	70
A.3.1. FCS_IPSEC_EXT.1 Extended: IPsec selected	70
A.3.2. FCS_TLSC_EXT & FCS_TLSS_EXT TLS Protocol	75
A.3.3. FCS_SSHC_EXT & FCS_SSHS_EXT SSH Protocol	75
A.3.4. FCS_HTTPS_EXT.1 Extended: HTTPS selected	82
A.3.5. FCS_COP.1/KeyedHash Cryptographic Operation (Keyed Hash Algorithm)	83
A.3.6. FIA_PSK_EXT.1 Extended: Pre-Shared Key Composition	83
A.3.7. FCS_DTLSC_EXT & FCS_DTLSS_EXT DTLS Protocol	84
A.4. Passphrase-based Key Entry	85
A.4.1. FCS_PCC_EXT.1 Extended: Cryptographic Password Construct and Conditioning	85
A.4.2. FCS_CKM.5 Cryptographic Key Derivation	86
A.4.3. FCS_COP.1/CMAC Cryptographic Operation (for cipher-based message authentication) ..	86
A.4.4. FCS_SNI_EXT.1 Extended: Cryptographic Operation (Salt and Nonce Generation)	87
A.5. Identification and Authentication (FIA)	87
A.5.1. Authentication using X.509 certificates	87
Appendix B: Conditionally Mandatory Requirements	93
B.1. Confidential Data on Nonvolatile Storage Devices	93
B.1.1. FPT_KYP_EXT.1 Extended: Protection of Key and Key Material	93
B.1.2. FCS_KYC_EXT.1 Extended: Key Chaining	94
B.1.3. FDP_DSK_EXT.1 Extended: Protection of Data on Storage Devices	95

B.2. PSTN Fax-Network Separation	96
B.2.1. FDP_FXS_EXT.1 Extended: Fax separation	96
B.3. Network Communications	96
B.3.1. FTP_TRP.1/NonAdmin Trusted path (for Non-administrators)	96
B.4. Authentication	97
B.4.1. FIA_AFL.1 Authentication failure handling	97
Appendix C: Optional Requirements	98
C.1. Image Overwrite	98
C.1.1. FDP_UDU_EXT.1 Document Unavailability	98
C.2. Wipe Data	98
C.2.1. FPT_WIPE_EXT.1 Data Wiping	98
C.3. Cryptographic Support (FCS)	99
C.3.1. FCS_DTLSC_EXT & FCS_DTLSS_EXT DTLS Protocol	99
C.3.2. FCS_TLSC_EXT & FCS_TLSS_EXT TLS Protocol	100
Appendix D: Extended Component Definitions	101
D.1. Cryptographic Support (FCS)	101
D.1.1. FCS_HTTPS_EXT Extended: HTTPS selected	101
D.1.2. FCS_IPSEC_EXT Extended: IPsec selected	102
D.1.3. FCS_KYC_EXT Extended: Cryptographic Operation (Key Chaining)	105
D.1.4. FCS_PCC_EXT Extended: Cryptographic Password Construction and Conditioning	106
D.1.5. FCS_RBG_EXT Random Bit Generation	108
D.1.6. FCS_SMC_EXT Extended: Submask Combining	109
D.1.7. FCS_SNI_EXT Extended: Cryptographic Operation (Salt and Nonce Generation)	110
D.1.8. FCS_SSHC_EXT SSH Client	111
D.1.9. FCS_SSHS_EXT SSH Server Protocol	113
D.2. User Data Protection (FDP)	115
D.2.1. FDP_DSK_EXT Extended: Protection of Data on Storage Devices	115
D.2.2. FDP_FXS_EXT Extended: Fax Separation	116
D.2.3. FDP_UDU_EXT Extended: Document Unavailability	117
D.3. Identification and Authentication (FIA)	119
D.3.1. FIA_PMG_EXT Extended: Password Management	119
D.3.2. FIA_PSK_EXT Extended: Pre-Shared Key Composition	120
D.3.3. Authentication using X.509 certificates (FIA_X509_EXT)	121
D.4. Protection of the TSF (FPT)	124
D.4.1. FPT_WIPE_EXT Extended: Data Wiping	124
D.4.2. FPT_SBT_EXT Extended: Secure Boot	125
D.4.3. FPT_KYP_EXT Extended: Protection of Key and Key Material	127
D.4.4. FPT_SKP_EXT Extended: Protection of TSF Data	128
D.4.5. FPT_TST_EXT Extended: TSF testing	129
D.4.6. FPT_TUD_EXT Extended: Trusted Update	131
Appendix E: Entropy Documentation and Assessment	133

E.1. Design Description	133
E.2. Entropy Justification	133
E.3. Operating Conditions	134
E.4. Health Testing	134
Appendix F: Key Management Document	135
F.1. Key Management Description	135
F.2. Key Management Diagram:	136
Appendix G: Glossary	137
Appendix H: Acronyms	145
Appendix I: Definitions and Rationale Tables	147
I.1. User Definitions	147
I.2. Asset Definitions	147
I.2.1. User Data	147
I.2.2. TSF Data	148
I.3. Threat Definitions	148
I.4. Organizational Security Policy Definitions	149
I.5. Assumption Definitions	150
I.6. Definitions of Security Objectives for the TOE	150
I.7. Definitions of Security Objectives for the Operational Environment	151
I.8. Security Objectives Tables	152
I.9. TOE Security Functional Requirements Rationale	155
I.10. Security Functional Requirements Dependencies Analysis	163

Preface

Objectives of Document

This document presents the Common Criteria (CC) collaborative Protection Profile (cPP) to express the security functional requirements (SFRs) and security assurance requirements (SARs) for a Hardcopy Device (HCD). The Evaluation activities that specify the actions the evaluator performs to determine if a product satisfies the SFRs captured within this cPP, are described in [\[SD\]](#).

Scope of Document

The scope of the cPP within the development and evaluation process is described in the Common Criteria for Information Technology Security Evaluation. In particular, a cPP defines the IT security requirements of a generic type of TOE and specifies the functional security measures to be offered by that TOE to meet stated requirements [\[\[CC1\]](#), Section B.14].

Intended Readership

The target audiences of this cPP are developers, CC consumers, system integrators, evaluators and schemes.

Although the cPP and SD may contain minor editorial errors, the cPP is recognized as living document and the iTC is dedicated to ongoing updates and revisions. Please report any issues to the HCD-iTC.

- [\[CC1\]](#) Common Criteria for Information Technology Security Evaluation, Part 1: Introduction and general model, CCMB-2022-11-001, CC:2022 Release 1, November 2022.
- [\[CC2\]](#) Common Criteria for Information Technology Security Evaluation, Part 2: Security functional components, CCMB-2022-11-002, CC:2022 Release 1, November 2022.
- [\[CC3\]](#) Common Criteria for Information Technology Security Evaluation, Part 3: Security assurance components, CCMB-2022-11-003, CC:2022 Release 1, November 2022.
- [\[CC4\]](#) Common Criteria for Information Technology Security Evaluation, Part 4: Framework for the specification of evaluation methods and activities, CCMB-2022-11-004, CC:2022 Release 1, November 2022.
- [\[CC5\]](#) Common Criteria for Information Technology Security Evaluation, Part 5: Pre-defined packages of security requirements, CCMB-2022-11-005, CC:2022 Release 1, November 2022.
- [\[CEM\]](#) Common Methodology for Information Technology Security Evaluation, Evaluation methodology, CCMB-2022-11-006, CC:2022 Release 1, November 2022.
- [\[CC-E&I\]](#) Errata and Interpretation for CC:2022 (Release 1) and CEM:2022 (Release 1), Version 1.2, 2025-10-15.
- [\[SFR-CRYPTO\]](#) Specification of Functional Requirements for Cryptography, Version 1.0, January 31, 2025.
- [\[SD\]](#) Supporting Document Mandatory Technical Document: Evaluation Activities for

collaborative Protection Profile for Hardcopy Devices, v2.0, 31 July 2026.

For more see the [Common Criteria Portal](#).

Chapter 1. PP Introduction

1.1. PP Reference Identification

- PP Reference: collaborative Protection Profile for Hardcopy Devices
- PP Version: 2.0
- PP Date: 31 July 2026

1.2. TOE Overview

The Target of Evaluation in this cPP is an HCD. HCDs support job functions to convert hardcopy documents into digital form (scanning), convert digital documents into hardcopy form (printing), duplicate hardcopy documents (copying), or transmit documents over a Public Switched Telephone Network (PSTN) connection (PSTN faxing). Hardcopy documents typically take the form of paper, but can take other forms (e.g. transparencies).

For the purpose of this cPP, a conforming HCD must support at least one of the job functions printing, scanning, or copying and must support the functions network communications and administration.

The job functions supported by the HCD and the network communications and administration functions are “Required Uses” of a conforming HCD and are mandatory functions. A conforming HCD may also support “Conditionally Mandatory Uses” as well as “Optional Uses”. Conditionally Mandatory Uses are optional functions, the presence of which in a HCD is not required for conformance, but which must meet conditionally mandatory requirements if they are present in a HCD. “Optional Uses” are optional functions that may, but need not, be evaluated.

1.3. TOE Design

1.3.1. Boundary of the TOE

The physical boundary of the TOE is the entire HCD product. Options and add-ons that are not security relevant, such as finishers, do not need to be included in the TOE. If it is possible for users to connect personal storage devices (such as portable flash memory devices) to the HCD, those devices and data contained within them are out of scope of the TOE and interfaces to connect such devices should be disabled.

The logical boundary of the TOE includes all security functions related to the Required Uses of the HCD as described in [Section 1.4.1, “USE CASE 1: Required Use Cases”](#), all Conditionally Mandatory Uses as described in [Section 1.4.2, “USE CASE 2: Conditionally Mandatory Use Cases”](#) that are present in the HCD, and all Optional Uses as described in [Section 1.4.3, “USE CASE 3: Optional Use Cases”](#) that are to be included in the evaluation.

1.3.2. Operational Environment

For the purposes of this cPP, HCDs are used in an office environment by commercial, government,

or other organizations, and are connected to a wired LAN. If a PSTN fax function is present, then the HCD can also be connected to the PSTN for sending and receiving PSTN faxes.

Users may interact with the HCD through a variety of interfaces:

- A Local User interacts with the HCD using its physical operator console
- A Network User uses interacts with the HCD using programs installed on personal computers or other IT devices external to the HCD which communicate with the HCD through the LAN. This includes the use of general client programs such as web browsers and specific programs such as print or scan drivers.

The HCD and External IT Entities may also interact independently of human User input.

The Operational Environment is assumed to be physically and logically protected from Threats originating from outside of that environment, typically by limiting physical access to the HCD and connecting it to a LAN that is protected from the public Internet.

1.4. TOE Use Case

1.4.1. USE CASE 1: Required Use Cases

The security-relevant use cases for Required Uses of a conforming HCD are:

1. One or more of the following:
 - a. **Printing:** A Network User sends a Document from an External IT Entity to the HCD over a LAN with instructions for printing. The HCD has the capability to protect the User's Document from unauthorized disclosure or alteration while it is in transit to the HCD, in Temporary Storage in the HCD, and before printed output is released to a User.
 - b. **Scanning:** A Local User initiates scanning a Document on the HCD and the HCD sends the digital image to an External IT Entity. The HCD has the capability to protect the User's Document from unauthorized disclosure or alteration while it is in Temporary Storage in the HCD and while it is in transit to the External IT Entity.
 - c. **Copying:** A Local User scans a Document on the HCD and the HCD prints the Document. The HCD has the capability to protect the User's Document from unauthorized disclosure and alteration while it is in Temporary Storage in the HCD.
2. **Configuration:** A Local or Network User with administrative privileges configures the security settings of the HCD. The HCD has the capability to assign Users to roles that distinguish Users who can perform administrative functions from Users who can perform User functions. The HCD also has the capability to protect its security settings from unauthorized disclosure and alteration when they are stored in the HCD and in transit to or from an External IT Entity.
3. **Auditing:** Authorized personnel monitor security-relevant events in an audit log. The HCD generates audit log records when security-relevant events occur and stores them within the HCD. It is mandatory that the HCD is able to securely transmit audit logs to an External IT Entity for storage. The HCD has the capability to protect audit logs from unauthorized disclosure or alteration while in transit to the External IT Entity and, if stored in the HCD, then in storage.
4. **Verifying firmware/software updates:** Authorized personnel install updated firmware/software

on the HCD. The HCD ensures that only authorized personnel are permitted to install firmware/software, has the capability to help the installer to verify the authenticity of the firmware/software update.

5. Verifying HCD function: The HCD checks itself for malfunctions by performing a self-test and verifying firmware/software integrity each time that it is powered on.

1.4.2. USE CASE 2: Conditionally Mandatory Use Cases

Conditionally Mandatory Uses are security-relevant capabilities that are optional in the HCD, however if they are present, must be conforming:

1. Sending PSTN faxes: A Local User scans a Document on the HCD, or a Network User sends a Document from an External IT Entity to the HCD; the User provides instructions for sending it to a remote PSTN fax destination; the HCD sends a facsimile of the Document over the PSTN to the PSTN fax destination using standard PSTN fax protocols. The HCD has the capability to protect the Network User's Document from unauthorized disclosure and alteration while in transit on the LAN. The HCD also has the capability to protect the User's Document from unauthorized disclosure and alteration while in Temporary Storage in the HCD.
2. Receiving PSTN faxes: A remote PSTN fax sender sends a facsimile of a Document over the PSTN to the HCD using standard PSTN fax protocols. The HCD has the capability to protect received PSTN faxes from unauthorized disclosure and alteration while it is present in the HCD. Further, the HCD has the capability to ensure that the PSTN fax modem is not used to access the LAN.
3. Storing and retrieving Documents: A Local or Network User instructs the HCD to store or retrieve an electronic Document in the HCD. The sources and destinations of such Documents may be any of the other operations such as scanning, printing, or PSTN faxing. The HCD has the capability to protect such Documents from unauthorized disclosure and alteration while in transit and in storage in the HCD.
4. Nonvolatile Storage Devices: Authorized personnel remove the HCD from service in its Operational Environment to perform preventative maintenance, repairs, or other servicing-related operations. The HCD has the capability to protect documents or confidential system information that may be present in Nonvolatile Storage Devices from exposure if such a device is removed from the HCD. The HCD also has the capability to destroy cryptographic key so that the encrypted data cannot subsequently be decrypted.

1.4.3. USE CASE 3: Optional Use Cases

Optional Uses are security-relevant capabilities that are optional in the HCD, and even if present in the HCD, are not required to be evaluated:

1. Image Overwrite: At the conclusion of an image processing job, residual image data may be present in the HCD. The HCD has the capability to actively overwrite such image data.
2. Wipe Data (e.g., Redeploying or Decommissioning the HCD): Authorized personnel remove the HCD from service in its Operational Environment to move it to a different Operational Environment, to permanently remove it from operation, or otherwise change its ownership. The HCD has the capability to make all customer data that may be present in the HCD unavailable for recovery if it is removed from the Operational Environment.

1.4.4. Major Security Functions of the HCD

To support the use cases in [Section 1.4, “TOE Use Case”](#), a conforming HCD provides the following security functions:

1. Identification, authentication, and authorization to use HCD functions
2. Access control
3. Encryption
4. Trusted communications
5. Administrative roles
6. Auditing
7. Trusted operation
8. PSTN fax-network separation (if PSTN fax function is present)
9. Data clearing and purging (optional)

Each of these functions is described in the next subsections.

1.4.4.1. Identification, Authentication, and Authorization

User identification, authentication, and authorization ensure that functions of the HCD are accessible only to Users who have been authorized by an Administrator. User identification and authentication is also used as the basis for access control and administrative roles and helps associate security-relevant events and HCD use with specific Users. Identification and authentication may be performed by the HCD or by an external server.

1.4.4.2. Access Control

Access controls ensure that Documents, information related to Document Processing, and security-relevant data are accessible only to Users who have appropriate access permissions.

1.4.4.3. Data Encryption

Data encryption ensures that data assets cannot be accessed while in transit on the LAN.

By policy, data encryption is also used to protect documents and confidential system information on Nonvolatile Storage Devices to protect such data if such a device is removed from the HCD.

The effectiveness of data encryption is assured through the use of internationally accepted cryptographic algorithms.

1.4.4.4. Trusted Communications

Trusted communication paths are established to ensure that communications with the HCD are performed with known endpoints.

1.4.4.5. Administrative Roles

Role-based access controls ensure that the ability to configure the security settings of the HCD is available only to Users who have been authorized with an Administrator role.

1.4.4.6. Auditing

Audit logs are generated by the HCD to ensure that security-relevant events and HCD use can be monitored by authorized personnel. The HCD must generate audit logs and store them within the HCD as well as securely transmit them to an External IT entity for storage.

1.4.4.7. Trusted Operation

Firmware/Software updates to the HCD are verified to ensure the authenticity of the firmware/software before applying the update. The HCD performs self-tests to ensure that its operation is not disrupted by some detectable malfunctions. The HCD performs hardware-anchored integrity verification of firmware/software at boot to ensure corrupted firmware/software is not executed.

1.4.4.8. PSTN Fax-Network Separation

If a conforming HCD has a PSTN fax function, PSTN fax-network separation ensures that the PSTN fax modem is not used to create a data bridge between the PSTN and the LAN.

1.4.4.9. Data Clearing and Purging

Optionally, an HCD may provide functions that actively overwrite image data, or that wipe/purge all customer-supplied information at the request of an authorized Administrator. These are discussed in [Appendix C, *Optional Requirements*](#).

Chapter 2. CC Conformance Claims

As defined by the references [\[CC1\]](#), [\[CC2\]](#), [\[CC3\]](#), and [\[CC-E&I\]](#) this cPP:

- Conforms to the requirements of Common Criteria CC:2022, Release 1.
- Errata and Interpretation for CC:2022 (Release 1) and CEM:2022 (Release 1), Version 1.2, 2025-10-15.
- Is CC Part 2 extended, CC Part 3 conformant.

2.1. Package Claims

The packages to which conformance can be claimed in conjunction with this cPP are:

- Functional Package for Transport Layer Security (TLS) Version 2.1 (PKG_TLS_v2.1) conformant

All cryptographic selections in the above packages must comply with the FCS_COP and FCS_CKM requirements of this cPP while utilizing this cPP's defined FCS_RBG_EXT.1.

2.2. Conformance to this Protection Profile

To claim conformance to this Protection Profile, the conforming Security Target must comply with all of the following rules:

1. The TOE must support at least one of the Required Uses scanning, printing, or copying, and must support the Required Uses network communications and administration, described in [Section 1.4.1, “USE CASE 1: Required Use Cases”](#).
2. Security for all of those Required Uses supported by the TOE must be evaluated, conforming to the requirements of this Protection Profile.
3. If the TOE supports any of the Conditionally Mandatory Uses described in [Section 1.4.2, “USE CASE 2: Conditionally Mandatory Use Cases”](#), then that support must be evaluated conforming to the corresponding conditionally mandatory requirements described in [Appendix B, *Conditionally Mandatory Requirements*](#).
4. The selected communications protocol(s) must be evaluated conforming to the corresponding selection-based protocol requirements in [Section A.3, “Protected Communications”](#).
5. The Security Target author may choose to include for evaluation any of the Optional Uses described in [Section 1.4.3, “USE CASE 3: Optional Use Cases”](#). The vendor may choose to evaluate those optional functions as described in [Appendix C, *Optional Requirements*](#).
6. The Security Target must conform to this Protection Profile as Exact Conformance.
7. This Protection Profile requires the use of evaluation activities defined in [\[SD\]](#).

Chapter 3. Security Problem Definition

The security problem is described in terms of the threats that the TOE is expected to address, assumptions about its operational environment, and any organizational security policies that the TOE is expected to enforce.

3.1. Users

A conforming TOE must define at least the following two User roles:

1. Normal Users [U.NORMAL] who are identified and authenticated and do not have an administrative role.
2. Administrators [U.ADMIN] who are identified and authenticated and have an administrative role.

A conforming TOE may allow additional roles, sub-roles, or groups. In particular, a conforming TOE may allow several administrative roles that have authority to administer different aspects of the TOE.

Note that a User can be a human user or an external IT entity. Also, a Normal User can be a Local User or a Network User as described in [Section 1.3.2, “Operational Environment”](#).

Additional details about Users are in [Section I.1, “User Definitions”](#).

3.2. Assets

From a User’s perspective, the primary Asset to be protected in a TOE is User Document Data [D.USER.DOC]. A User’s job instructions, User Job Data [D.USER.JOB] (information related to a User’s Document or Document Processing Job), may also be protected if their compromise impacts the protection of User Document Data. Together, User Document Data and User Job Data are considered to be User Data.

As an illustrative example, data sent by a Network User for printing contains a User’s Document [D.USER.DOC] which must not be accessed by anyone else, and job instructions such as the destination to send scanned Documents [D.USER.JOB] which must not be altered by anyone else.

From an Administrator’s perspective, the primary Asset to be protected in a TOE is data that is used to configure and monitor the secure operation of the TOE. This kind of data is considered to be TOE Security Functionality (TSF) Data.

There are two broad categories for this kind of data:

1. Protected TSF Data, which may be read by any User but must be protected from unauthorized modification and deletion [D.TSF.PROT]; and,
2. Confidential TSF Data, which may neither be read nor modified or deleted except by authorized Users [D.TSF.CONF].

Examples of assets requiring protection include transmitted communication data on the network

(against unauthorized disclosure or modification), firmware and/or software in the HCD (against unauthorized modification or deletion), and audit data generated by the HCD (against unauthorized modification or deletion).

An illustrative example is data that is used by the TOE to identify and authenticate authorized Users. Typically, a username that is used for identification may be read by anyone but must be protected from unauthorized modification and deletion [D.TSF.PROT]. In contrast, a User's password that is used for authentication must be confidential, prohibiting any Unauthorized Access [D.TSF.CONF].

If TSF Data is compromised, it can be used for a variety of malicious purposes that include elevation of privileges, accessing stored Documents, redirecting the destination of processed Documents, masquerading as an authorized User or Administrator, altering the operating firmware/software of the TOE, and attacking External IT Entities.

In a conforming TOE, TSF Data is clearly identified and categorized as either Protected TSF Data or Confidential TSF Data.

From a network security perspective, it is important to ensure the secure operation of the TOE and other IT entities in its Operational Environment. Since the Operational Environment is outside of the TOE, Organizational Security Policies are employed to address protection of the Operational Environment.

Additional details about assets are in [Section I.2, "Asset Definitions"](#).

3.3. Threats

The following are Threats against the TOE that are countered by conforming products. Additional details about threats are in [Section I.3, "Threat Definitions"](#).

3.3.1. Unauthorized Access to User Data

An attacker may access (read, modify, or delete) User Document Data or change (modify or delete) User Job Data in the TOE through one of the TOE's interfaces [T.UNAUTHORIZED_ACCESS]. For example, depending on the design of the TOE, the attacker might access the printed output of a Network User's print job, or modify the instructions for a job that is waiting in a queue, or read User Document Data that is in a User's private or group storage area.

3.3.2. Unauthorized Access to TSF Data

An attacker may gain Unauthorized Access to TSF Data in the TOE through one of the TOE's interfaces [T.TSF_COMPROMISE]. For example, depending on the design of the TOE, the attacker might use Unauthorized Access to TSF Data to elevate their own privileges, alter an Address Book to redirect output to a different destination, or use the TOE's Credentials to gain access to an external server.

3.3.3. Installation of Unauthorized Firmware/Software

An attacker may cause the installation of unauthorized firmware/software on the TOE

[T.UNAUTHORIZED_UPDATE]. For example, unauthorized firmware/software could be used to gain access to information that is processed by the TOE, or to attack other systems on the LAN.

3.3.4. Network Communication Attacks

An attacker may access data in transit or otherwise compromise the security of the TOE by monitoring or manipulating network communication [T.NET_COMPROMISE]. For example, here are several ways that network communications could be compromised: By monitoring clear-text communications on a wired LAN, the attacker might obtain User Document Data, User Credentials, or system Credentials, or hijack an interactive session. The attacker might record and replay a network communication session in order to log into the TOE as an authorized User to access Documents or as an authorized Administrator to change security settings. The attacker might masquerade as a trusted system on the LAN in order to receive outgoing scan jobs, to record the transmission of system Credentials, or to send malicious data to the TOE.

3.3.5. Malfunction

A malfunction of the TSF may cause loss of security if the TOE is permitted to operate while in a degraded state [T.TSF_FAILURE]. Hardware or firmware/software malfunctions can produce unpredictable results, with a possibility that security functions will not operate correctly.

3.3.6. Weak Cryptography

An unauthorized user or attacker that observes network traffic transmitted to and from the TOE may cryptographically exploit poorly chosen cryptographic algorithms, random bit generators, ciphers or key sizes [T.WEAK_CRYPTO].

3.4. Assumptions

The following assumptions must be upheld so that the objectives and requirements can effectively counter the threats described in this Protection Profile. Additional details about assumptions are in [Section I.5, “Assumption Definitions”](#).

3.4.1. Physical Security

Physical security, commensurate with the value of the TOE and the data it stores or processes, is assumed to be provided by the environment [A.PHYSICAL]. The TOE is assumed to be located in a physical environment that is controlled or monitored such that a physical attack is prevented or detected.

3.4.2. Network Security

The Operational Environment is assumed to protect the TOE from direct, public access to its LAN interface [A.NETWORK]. The TOE is not intended to withstand network-based attacks from an unmanaged network environment.

3.4.3. Administrator Trust

TOE Administrators are trusted to administer the TOE according to site security policies [A.TRUSTED_ADMIN]. It is the responsibility of the TOE Owner to only authorize administrators who are trusted to configure and operate the TOE according to site policies and to not use their privileges for malicious purposes.

3.4.4. User Training

Authorized Users are trained to use the TOE according to site security policies [A.TRAINED_USERS]. It is the responsibility of the TOE Owner to only authorize Users who are trained to use the TOE according to site policies.

3.5. Organizational Security Policies

The following are Organizational Security Policies (OSPs) that are upheld by conforming products. Additional details about OSPs are in [Section I.4, “Organizational Security Policy Definitions”](#).

3.5.1. User Authorization

Users must be authorized before performing Document Processing and administrative functions [P.AUTHORIZATION]. Authorization allows the TOE Owner to control who is able to use the resources of the TOE and who is permitted to perform administrative functions.

3.5.2. Auditing

Security-relevant activities must be audited and the log of such actions must be stored within the TOE as well as protected and transmitted to an External IT Entity [P.AUDIT]. Stored internally as well as on an External IT Entity, an audit trail makes it possible for authorized personnel to review and identify suspicious activities and to account for TOE use as may be required by site policy or regulations.

3.5.3. Protected Communications

The TOE must be able to identify itself to other devices on the LAN [P.COMMS_PROTECTION]. Assuring identification helps prevent an attacker from masquerading as the TOE in order to receive incoming print jobs, recording the transmission of User Credentials, or sending malicious data to External IT Entities.

3.5.4. Storage Encryption

If the TOE stores User Document Data or Confidential TSF Data on Nonvolatile Storage Devices, it will encrypt such data on those devices and the TOE shall provide a function that an authorized administrator may destroy encryption keys or keying material when the TOE is removed from its Operational Environment or its ownership is changed [P.STORAGE_ENCRYPTION]. Data is assumed to be protected by the TSF when the TOE is operating in its Operational Environment. However, if Nonvolatile Storage Devices are removed from the TOE for Servicing, redeployment to another environment, or decommissioning, an attacker may be able to expose or modify User Document

Data or Confidential TSF Data. Encrypting such data prevents the attacker from doing so without access to encryption keys or keying material.

Cleartext keys, submasks, random numbers, or any other values that contribute to the creation of encryption keys for Nonvolatile Storage of User Document Data or Confidential TSF Data must be protected from unauthorized access and must not be stored on any Nonvolatile Storage Device without protection [P.KEY_MATERIAL]. Unauthorized possession of key material in cleartext may allow an attacker to decrypt User Document Data or Confidential TSF Data.

3.5.5. PSTN Fax-Network Separation (conditionally mandatory)

If the TOE includes a PSTN fax function, it will ensure separation between the PSTN fax line and the LAN [P.FAX_FLOW]. The TOE is assumed to be in an Operational Environment that is protected, such as by an external firewall. However, the PSTN fax modem may be connected to a public switched telephone network. Ensuring separation of the PSTN fax and network prevents an attacker from using the PSTN fax modem to bypass the firewall or other external protection to access the protected environment.

3.5.6. Image Overwrite (optional)

Upon completion or cancellation of a Document Processing job, periodically, or when requested by an authorized administrator, residual image data in the TOE shall be made irretrievable from its Nonvolatile Storage Devices [P.IMAGE_OVERWRITE]. A customer may be concerned that image data that has been dereferenced by the TOE operating firmware/software may remain on Nonvolatile Storage Devices in the TOE after a Document Processing job has been completed or cancelled. Such customers desire that the image data be made unavailable by overwriting it with other data.

3.5.7. Wipe Data (optional)

The TOE shall provide a function that an authorized administrator can invoke to make all customer-supplied User Data and TSF Data permanently irretrievable from Nonvolatile Storage Devices [P.WIPE_DATA]. A customer may be concerned that data which is considered confidential in the Operational Environment may remain in Nonvolatile Storage Devices in the TOE after the TOE is permanently removed from its Operational Environment to be decommissioned from service or to be redeployed to a different Operational Environment. Such customers desire that all customer-supplied User Data and TSF Data be wiped/purged from the TOE so that it cannot be retrieved outside of the Operational Environment even if the data are encrypted and its cryptographic key is destroyed.

Note: Cryptographic erase which is covered in the mandatory requirement of FCS_CKM.6 can be used as a method to remove some parts of User Data and TSF Data, but it cannot be a single method to remove User Data and TSF Data unless all the data are encrypted.

3.5.8. Root of Trust

The vendor provides a Root of Trust (RoT) that is comprised of the TOE firmware, hardware, and pre-installed public keys or required critical security parameters, free of intentionally malicious capabilities [P.ROT_INTEGRITY]. The platform trusts the RoT since it cannot verify the integrity and authenticity of the RoT.

Chapter 4. Security Objectives

4.1. Security Objectives for the TOE

The following Security Objectives must be fulfilled by the TOE. Additional details about objectives for the TOE are in [Section I.6, “Definitions of Security Objectives for the TOE”](#) and [Section I.7, “Definitions of Security Objectives for the Operational Environment”](#).

4.1.1. User Authorization

The TOE shall perform authorization of Users in accordance with security policies [O.USER_AUTHORIZATION].

This objective supports the policy that Users are authorized to administer the TOE or perform Document Processing functions that consume TOE resources. Users must be authorized to perform any of the Document Processing functions present in the TOE.

The mechanism for authorization is implemented within the TOE, and it may also depend on a trusted External IT Entity. If a conforming TOE supports more than one mechanism, then each should be evaluated as separate modes of operation.

In the case of printing (if that function is present in the TOE), User authorization may take place after the job has been submitted but must take place before printed output is made available to the User.

Users must be authorized to perform PSTN fax sending functions and document storage and retrieval functions, if such functions are provided by the conforming TOE.

Note that the TOE can receive a PSTN fax without any User authorization, but the received Document is subject to access controls.

4.1.2. User Identification and Authentication

The TOE shall perform identification and authentication of Users for operations that require access control, User authorization, or Administrator roles [O.USER_I&A].

The mechanism for identification and authentication (I&A) is implemented within the TOE, and it may also depend on a trusted External IT Entity (e.g., LDAP, Kerberos, or Active Directory). If a conforming TOE supports more than one mechanism, then each should be evaluated as separate modes of operation.

4.1.3. Access Control

The TOE shall enforce access controls to protect User Data and TSF Data in accordance with security policies [O.ACCESS_CONTROL].

The guiding principles for access control security policies in this cPP are:

1. User Document Data [D.USER.DOC] can be accessed only by the Document owner or an

Administrator.

2. User Job Data [D.USER.JOB] can be read by any User but can be modified only by the Job Owner or an Administrator.
3. Protected TSF Data [D.TSF.PROT] are data that can be read by any User but can be modified only by an Administrator or (in certain cases) a Normal User who is the owner of or otherwise associated with that data.
4. Confidential TSF Data [D.TSF.CONF] are data that can only be accessed by an Administrator or (in certain cases) a Normal User who is the owner of or otherwise associated with that data.

The Security Target of a conforming TOE must clearly specify its access control policies for User Data and TSF Data.

4.1.4. Administrator Roles

The TOE shall ensure that only authorized Administrators are permitted to perform administrator functions [O.ADMIN_ROLES].

This objective addresses the need to have at least one Administrator role that is distinct from Normal Users. A conforming TOE may have specialized Administrator sub-roles, such as for device management, network management, or audit management.

4.1.5. Firmware/Software Update Verification

The TOE shall provide mechanisms to verify the authenticity of firmware/software updates [O.UPDATE_VERIFICATION].

This objective addresses the concern that malicious firmware/software may be introduced into the TOE as a firmware/software update. Verifying authenticity, such as with a digital signature or published hash, is required. Access control by itself does not satisfy this objective.

4.1.6. Self-test

The TOE shall test some subset of its security functionality to help ensure that subset is operating properly [O.TSF_SELF_TEST].

A malfunction of the TOE may compromise its security if the malfunction is not detected and the TOE is allowed to operate. Self-test is intended to detect such malfunctions. It is performed during power-up.

4.1.7. Communications Protection

The TOE shall have the capability to protect LAN communications of User Data and TSF Data from Unauthorized Access, replay, and source/destination spoofing [O.COMMS_PROTECTION]. This objective addresses the common concerns of network communications:

1. Sensitive data or Credentials are obtained by monitoring LAN data outside of the TOE.
2. A successfully authenticated session is captured and replayed on the LAN, permitting the attacker to masquerade as the authenticated User.

3. Sensitive data or Credentials are obtained by redirecting communications from the TOE or from an External IT Entity to a malevolent destination.

4.1.8. Auditing

The TOE shall generate audit data and store it internally as well as be capable of sending it to a trusted External IT Entity [O.AUDIT].

The TOE must store audit data internally with appropriate access controls to ensure confidentiality and integrity. Additionally, the TOE must be able to securely send audit data to a trusted External IT Entity (e.g., an audit server such as a syslog server).

4.1.9. Storage Encryption

If the TOE stores User Document Data or Confidential TSF Data in Nonvolatile Storage devices, then the TOE shall encrypt such data on those devices. [O.STORAGE_ENCRYPTION].

This objective addresses the concern that User Document Data or Confidential TSF Data on a Nonvolatile Storage Device may be exposed if the device is removed from the TOE, such as for Servicing, Redeployment to another environment, or Decommissioning.

4.1.10. Protection of Key Material

The TOE shall protect from unauthorized access any cleartext keys, submasks, random numbers, or other values that contribute to the creation of encryption keys for storage of User Document Data or Confidential TSF Data in Nonvolatile Storage Devices; The TOE shall ensure that such key material is not stored in cleartext on the storage device that uses that material [O.KEY_MATERIAL].

This objective addresses the concern that unauthorized possession of keys or key material may be used to decrypt User Document Data or Confidential TSF Data.

4.1.11. PSTN Fax-Network Separation (conditionally mandatory)

If the TOE provides a PSTN fax function, then the TOE shall ensure separation of the PSTN fax telephone line and the LAN, by system design or active security function [O.FAX_NET_SEPARATION].

This objective addresses customer concerns about having a telephone line connected to a device that is inside their firewall. Depending on implementation, it may be satisfied in different ways, such as by system architecture (no data path from the PSTN fax interface to the network interface), by system design (fax chipset recognizes only PSTN fax protocols), or by active security function (flow control).

4.1.12. Image Overwrite (optional)

Upon completion or cancellation of a Document Processing job, periodically, or when requested by an authorized administrator, the TOE shall overwrite residual image data from its Nonvolatile Storage Devices [O.IMAGE_OVERWRITE]. This objective addresses customer concerns that image data may remain on Nonvolatile Storage Devices in the TOE after a Document Processing job has

been completed or cancelled.

4.1.13. Wipe Data (optional)

The TOE provides a function that an authorized administrator can invoke to make all customer-supplied User Data and TSF Data permanently irretrievable from Nonvolatile Storage Devices [O.WIPE_DATA]. This objective addresses customer concerns that data that is protected in the Operational Environment may remain in Nonvolatile Storage Devices after the TOE is permanently removed from its Operational Environment to be decommissioned from service or to be redeployed to a different Operational Environment.

4.1.14. Authentication Failures (conditionally mandatory)

The TOE resists repeated attempts to guess authorization data [O.AUTH_FAILURES] by responding to consecutive failed attempts in a way that prevents an attacker from exploring a significant amount of the space of possible authorization data values.

Note: This Security Objective needs to be Conditionally Mandatory based on the condition that the TOE has an internal authentication mechanism. Also, the HCD must ensure the HCD does not outlaw 3rd Party external authentication mechanisms.

4.1.15. Firmware Integrity

The TOE ensures its own integrity has remained intact [O.FW_INTEGRITY] and attests its integrity to outside parties on request.

4.1.16. Strong Cryptography

The TOE implements strong cryptographic mechanisms and algorithms according to recognized standards [O.STRONG_CRYPTO], including support for random bit generation based on recognized standards and a source of sufficient entropy. The TOE uses key sizes that are recognized as providing sufficient resistance to current attack capabilities.

4.2. Security Objectives for the Operational Environment

The following Security Objectives must be provided by the Operational Environment. Additional details about objectives for the Operational Environment are in [Section I.7, “Definitions of Security Objectives for the Operational Environment”](#).

4.2.1. Physical Protection

The Operational Environment shall provide physical security, commensurate with the value of the TOE and the data it stores or processes [OE.PHYSICAL_PROTECTION].

Due to its intended function, this kind of TOE must be physically accessible to authorized Users, but it is not expected to be hardened against physical attacks. Therefore, the environment must provide an appropriate level of physical protection or monitoring to prevent physical attacks.

4.2.2. Network Protection

The Operational Environment shall provide network security to protect the TOE from direct, public access to its LAN interface [OE.NETWORK_PROTECTION].

This kind of TOE is not intended to be directly connected to a hostile network. Therefore, the environment must provide an appropriate level of network isolation.

4.2.3. Trusted Administrators

The TOE Owner shall establish trust that Administrators will not use their privileges for malicious purposes [OE.ADMIN_TRUST].

Administrators have privileges that can be misused for malicious purposes. It is the responsibility of the TOE Owner to grant administrator privileges only to individuals whom the TOE Owner trusts.

4.2.4. Trained Users

The TOE Owner shall ensure that Users are aware of site security policies and have the competence to follow them [OE.USER_TRAINING].

Site security depends on a combination of TOE security functions and appropriate use of those functions by Normal Users. Manufacturers may provide guidance to the TOE Owner regarding the TOE security functions that apply to Normal Users.

4.2.5. Trained Administrators

The TOE Owner shall ensure that Administrators are aware of site security policies and have the competence to use manufacturer's guidance to correctly configure the TOE and protect passwords and keys accordingly [OE.ADMIN_TRAINING].

This kind of TOE may have many options for enabling and disabling security functions. Administrators must be able to understand and configure the TOE security functions to enforce site security policies.

4.3. Security Objectives Rationale

The following table describes how the assumptions, threats, and organizational security policies map to the security objectives.

Table 2. Mapping between Security Problem Definition and Security Objectives

Security Objectives	Threat, Assumption, or OSP	Rationale
O.USER_I&A	T.UNAUTHORIZED_ACCESS T.TSF_COMPROMISE P.AUTHORIZATION	The TOE shall perform identification and authentication of Users for operations that require access control, User authorization, or Administrator roles.
O.ACCESS_CONTROL	T.UNAUTHORIZED_ACCESS T.TSF_COMPROMISE P.AUDIT	The TOE shall enforce access controls to protect User Data and TSF Data in accordance with security policies.
O.USER_AUTHORIZATION	P.AUTHORIZATION P.AUDIT	The TOE shall perform authorization of Users in accordance with security policies.
O.ADMIN_ROLES	T.UNAUTHORIZED_ACCESS T.TSF_COMPROMISE P.AUTHORIZATION	The TOE shall ensure that only authorized Administrators are permitted to perform administrator functions.
O.UPDATE_VERIFICATION	T.UNAUTHORIZED_UPDATE	The TOE shall provide mechanisms to verify the authenticity of firmware/software updates.
O.TSF_SELF_TEST	T.TSF_FAILURE	The TOE shall test some subset of its security functionality to help ensure that subset is operating properly.
O.COMMS_PROTECTION	T.NET_COMPROMISE P.COMMS_PROTECTION	The TOE shall have the capability to protect LAN communications of User Data and TSF Data from Unauthorized Access, replay, and source/destination spoofing.
O.AUDIT	P.AUDIT	The TOE shall generate audit data and store it internally as well as be capable of sending it to a trusted External IT Entity.
O.STORAGE_ENCRYPTION	P.STORAGE_ENCRYPTION	If the TOE stores User Document Data or Confidential TSF Data in Nonvolatile Storage devices, then the TOE shall encrypt such data on those devices.
O.KEY_MATERIAL	P.KEY_MATERIAL	The TOE shall protect from unauthorized access any cleartext keys, submasks, random numbers, or other values that contribute to the creation of encryption keys for storage of User Document Data or Confidential TSF Data in Nonvolatile Storage Devices; The TOE shall ensure that such key material is not stored in cleartext on the storage device that uses that material.

Security Objectives	Threat, Assumption, or OSP	Rationale
O.FAX_NET_SEPARATION	P.FAX_FLOW	If the TOE provides a PSTN fax function, then the TOE shall ensure separation of the PSTN fax telephone line and the LAN, by system design or active security function.
O.IMAGE_OVERWRITE	P.IMAGE_OVERWRITE	Upon completion or cancellation of a Document Processing job, the TOE shall overwrite residual image data from its Nonvolatile Storage Devices.
O.WIPE_DATA	P.WIPE_DATA	The TOE provides a function that an authorized administrator can invoke to make all customer-supplied User Data and TSF Data permanently irretrievable from Nonvolatile Storage Devices.
O.AUTH_FAILURES	T.UNAUTHORIZED_ACCESS	The TOE resists repeated attempts to guess authorization data by responding to consecutive failed attempts in a way that prevents an attacker from exploring a significant amount of the space of possible authorization data values.
O.FW_INTEGRITY	P.ROT_INTEGRITY	The TOE ensures its own integrity has remained intact and attests its integrity to outside parties on request.
O.STRONG_CRYPTO	T.WEAK_CRYPTO	The TOE implements strong cryptographic mechanisms and algorithms according to recognized standards, including support for random bit generation based on recognized standards and a source of sufficient entropy. The TOE uses key sizes that are recognized as providing sufficient resistance to current attack capabilities.
OE.PHYSICAL_PROTECTION	A.PHYSICAL	The Operational Environment shall provide physical security, commensurate with the value of the TOE and the data it stores or processes.
OE.NETWORK_PROTECTION	A.NETWORK	The Operational Environment shall provide network security to protect the TOE from direct, public access to its LAN interface.
OE.ADMIN_TRUST	A.TRUSTED_ADMIN	The TOE Owner shall establish trust that Administrators will not use their privileges for malicious purposes.
OE.USER_TRAINING	A.TRAINED_USERS	The TOE Owner shall ensure that Users are aware of site security policies and have the competence to follow them.
OE.ADMIN_TRAINING	A.TRAINED_USERS	The TOE Owner shall ensure that Administrators are aware of site security policies and have the competence to use manufacturer's guidance to correctly configure the TOE and protect passwords and keys accordingly.

Chapter 5. Security Functional Requirements

5.1. Conventions

The individual security functional requirements are specified in the sections below. The following conventions are used for the completion of operations:

- *[Italicized text within square brackets]* indicates an operation to be completed by the ST author.
- **Bold text** indicates additional text provided as a refinement.
- **[Bold text within square brackets]** indicates the completion of an assignment.
- [text within square brackets] indicates the completion of a selection.
- ~~text that has been struck out~~ indicates refinements made in the Protection Profile, such as in a selection, and should not be included by the ST author.
- Iteration: indicated by adding a string starting with “/” (e.g. “FCS_COP.1/Hash”).
- Extended SFRs are identified by having a label “EXT” at the end of the SFR name.

5.2. Security Audit (FAU)

5.2.1. FAU_GEN.1 Audit data generation

(for O.AUDIT) **Hierarchical to:**

No other components.

Dependencies:

FPT_STM.1 Reliable time stamps

FAU_GEN.1.1 The TSF shall be able to generate audit data of the following auditable events:

- a. Start-up and shutdown of the audit functions;
- b. All auditable events for the [not specified] level of audit; and
- c. **All auditable events specified in Table 3**, [assignment: *other specifically defined auditable events*].

FAU_GEN.1.2 The TSF shall record within each audit data at least the following information:

- a. Date and time of the auditable event, type of event, subject identity (if applicable), and the outcome (success or failure) of the event;
- b. For each auditable event type, based on the auditable event definitions of the functional components included in the PP, PP-Module, functional package or ST, **additional information specified in Table 3**, [assignment: *other audit relevant information*].

Table 3. Auditable Events

Auditable Event	Relevant SFR	Additional Information
Job Completion	FDP_ACF.1	Type of Job
Unsuccessful login attempts limit is met or exceeded	FIA_AFL.1	None
Unsuccessful User authentication	FIA_UAU.1	Supplied User ID/Name and origin of the attempt (e.g., IP address)
Unsuccessful User identification	FIA_UID.1	Supplied User ID/Name and origin of the attempt (e.g., IP address)
Use of management functions	FMT_SMF.1	None
Modification to the group of Users that are part of a role	FMT_SMR.1	None
Changes to the time	FPT_STM.1	None
Failure to establish session	FTP_ITC.1, FTP_TRP.1/Admin, FTP_TRP.1/NonAdmin	Reason for failure

Application Note:

In cases where user identification events are inseparable from user authentication events, they may be considered to be a single event for audit purposes.

Regarding FMT_SMR.1, if the relationship between users and roles is not modifiable, its auditable event cannot be generated and the requirement to generate audit data can be ignored.

The ST author can include other auditable events directly in the table; they are not limited to the list presented.

5.2.2. FAU_GEN.2 User identity association

(for O.AUDIT)

Hierarchical to:

No other components.

Dependencies:

FAU_GEN.1 Audit data generation

FIA_UID.1 Timing of identification

FAU_GEN.2.1 For audit events resulting from actions of identified users, the TSF shall be able to associate each auditable event with the identity of the user that caused the event.

5.2.3. FAU_SAR.1 Audit review

(for O.AUDIT)

Hierarchical to:

No other components.

Dependencies:

FAU_GEN.1 Audit data generation

FAU_SAR.1.1 The TSF shall provide [an Administrator] with the capability to read [all records] from the audit data.

FAU_SAR.1.2 The TSF shall provide the audit data in a manner suitable for the user to interpret the information.

5.2.4. FAU_SAR.2 Restricted audit review

(for O.AUDIT)

Hierarchical to:

No other components.

Dependencies:

FAU_SAR.1 Audit review

FAU_SAR.2.1 The TSF shall prohibit all users read access to the audit data, except those users that have been granted explicit read access.

5.2.5. FAU_STG.1 Audit data storage location

(for O.AUDIT)

Hierarchical to:

No other components.

Dependencies:

FAU_GEN.1 Audit data generation

FTP_ITC.1 Inter-TSF trusted channel

FAU_STG.1.1 The TSF shall be able to store generated audit data on the [TOE itself, transmit the generated audit data to an external IT entity using a trusted channel according to FTP_ITC].

5.2.6. FAU_STG.2 Protected audit data storage

(for O.AUDIT)

Hierarchical to:

No other components.

Dependencies:

FAU_GEN.1 Audit data generation

FAU_STG.2.1 The TSF shall protect the stored audit data in the audit trail from unauthorized deletion.

FAU_STG.2.2 The TSF shall be able to [prevent] unauthorized modifications to the stored audit data in the audit trail.

5.2.7. FAU_STG.5 Prevention of audit data loss

(for O.AUDIT)

Hierarchical to:

FAU_STG.4 Action in case of possible audit data loss

Dependencies:

FAU_STG.2 Protected audit data storage

FAU_GEN.1 Audit data generation

FAU_STG.5.1 Refinement The TSF shall [selection: ~~ignore audited events~~, “prevent audited events, except those taken by the authorized user with special rights”, ~~overwrite the oldest stored audit records~~], [assignment: *other actions to be taken in case of audit storage failure and conditions for the actions*] if the audit data storage is full.

5.3. Cryptographic Support (FCS)

5.3.1. FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)

(for O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

[FCS_CKM.2 Cryptographic Key Establishment (Refinement), or

FCS_COP.1/SigGen Cryptographic Operation (for signature generation/verification)],

FCS_CKM.6 Timing and event of cryptographic key destruction

FCS_CKM.1.1/AKG Refinement: The TSF shall generate **asymmetric** cryptographic keys in accordance with a specified cryptographic key generation algorithm: [selection:

- *RSA schemes using cryptographic key sizes of 2048-bit or greater that meet the following: FIPS PUB 186-5, “Digital Signature Standard (DSS)”, Appendix A.1;*
- *ECC schemes using ‘NIST curves’ [selection: P-256, P-384, P-521] that meet the following: FIPS PUB 186-5, “Digital Signature Standard (DSS)”, Appendix A.2;*

- FFC schemes using cryptographic key sizes of 2048-bit or greater that meet the following: FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Appendix B.1
- FFC Schemes using ‘safe-prime’ groups that meet the following: “NIST Special Publication 800-56A Revision 3, Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” and [selection: RFC 3526, RFC 7919].
- KCDSA-based key establishment schemes using key size of [selection: (2048, 224) bit, (2048, 256) bit, (3072, 256) bit]: ISO/IEC 14888-3:2018, (Subclause 6.3) “KCDSA”
- EC-KCDSA-based key establishment schemes using NIST curve of [selection: P-224, P-256, B-233, B-283, K-233, K-283]: ISO/IEC 14888-3:2018, (Subclause 6.7) “EC-KCDSA”
- Module-Lattice-Based Key-Encapsulation Mechanism Standard using the parameter set ML-KEM-1024 that meets the following: [FIPS 203, Module-Lattice-Based Key-Encapsulation Mechanism Standard]
- Module-Lattice-Based Digital Signature Standard using the parameter set ML-DSA-87 that meets the following [FIPS 204, Module-Lattice-Based Digital Signature Standard]

~~] and specified cryptographic key sizes [assignment: cryptographic key sizes] that meet the following: [assignment: list of standards].~~

Application Note:

The ST author selects all key generation schemes used for key establishment (including generation of ephemeral keys) and device authentication. When key generation is used for key establishment, the schemes in FCS_CKM.2.1 and selected cryptographic protocols must match the selection. When key generation is used for device authentication, other than SSH-RSA, ECDSA-SHA2-NISTP256, ECDSA-SHA2-NISTP384 and ECDSA-SHA2-NISTP521, the public key is expected to be associated with an X.509v3 certificate.

If the TOE acts as a receiver in the key establishment schemes and is not configured to support mutual authentication, the TOE does not need to implement key generation.

5.3.2. FCS_CKM.1/SKG Cryptographic Key Generation (Symmetric Keys)

(for O.COMMS_PROTECTION, O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

[FCS_COP.1/DataEncryption Cryptographic Operation (Symmetric encryption/decryption), or
FCS_COP.1/StorageEncryption Cryptographic Operation (Data Encryption/Decryption), or
FCS_COP.1/KeyWrap Cryptographic Operation (Key Wrapping), or
FCS_COP.1/KeyEnc Cryptographic operation (Key Encryption), or
FCS_COP.1/KeyedHash Cryptographic Operation (for keyed-hash message authentication), or
FCS_COP.1/CMAC Cryptographic Operation (for cipher-based message authentication)]
FCS_CKM.6 Timing and event of cryptographic key destruction
FCS_RBG_EXT.1 Random Bit Generation

FCS_CKM.1.1/SKG Refinement: The TSF shall generate **symmetric** cryptographic keys ~~in accordance with a specified cryptographic key generation algorithm~~ using a [Random Bit Generator as specified in FCS_RBG_EXT.1] and specified cryptographic key sizes [selection: 128 bits, 192 bits, 256 bits, 512 bits] that meet the following: [selection: ISO/IEC 18031:2011 (Clause 9) [DRBG], NIST SP 800-133 Rev.2 Section [selection: 6.1, 6.3]].

Application Note:

Symmetric keys may be used to generate keys along the key chain.

5.3.3. FCS_CKM.2 Cryptographic Key Establishment

(for O.COMMS_PROTECTION, O.STRONG_CRYPT0)

Hierarchical to:

No other components.

Dependencies:

FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)

FCS_CKM.6 Timing and event of cryptographic key destruction,

[if selected: FCS_COP.1/KeyEncap Key Encapsulation]

FCS_CKM.2.1 Refinement The TSF shall ~~distribute~~ perform cryptographic ~~keys~~ key establishment in accordance with a specified cryptographic key ~~distribution~~ establishment method: [selection:

- *RSA-based key establishment schemes that meet the following: [selection: RSAES-PKCS1-v1_5 as specified in Section 7.2 of RFC 8017, “Public-Key Cryptography Standards (PKCS) #1: RSA Cryptography Specifications Version 2.2”, NIST SP 800-56B Revision 2 (Section 8.3) [KAS2]];*
- *Elliptic curve-based key establishment schemes that meet the following: NIST Special Publication 800-56A Revision 3, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography”;*
- *Finite field-based key establishment schemes that meet the following: NIST Special Publication 800-56A Revision 3, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography”;*
- *FFC Schemes using “safe-prime” groups that meet the following: ‘NIST Special Publication 800-56A Revision 3, “Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography” and [selection: RFC 3526, RFC 7919];*
- *Module-Lattice-based Key-Encapsulation Mechanisms (ML-KEM) that meet the following: NIST FIPS 203.*

] ~~that meets the following: [assignment: list of standards]~~.

Application Note:

This is a refinement of the SFR FCS_CKM.2 to deal with key establishment rather than key distribution.

The ST author selects all key establishment schemes used for the selected cryptographic protocols.

The elliptic curves used for the key establishment scheme correlate with the curves specified in FCS_CKM.1.1/AKG.

The domain parameters used for the finite field-based key establishment scheme are specified by the key generation according to FCS_CKM.1.1/AKG.

If ML-KEM is selected, FCS_COP.1/KeyEncap must be claimed. The parameters used for the Module-Lattice-based Key-Encapsulation Mechanisms are specified in FCS_CKM.1.1/AKG and FCS_COP.1.1/KeyEncap.

5.3.4. FCS_CKM.6 Timing and event of cryptographic key destruction

(for O.COMMS_PROTECTION, O.STORAGE_ENCRYPTION, O.WIPE_DATA)

Hierarchical to:

No other components.

Dependencies:

~~[FDP_ITC.1 Import of user data without security attributes, or
FDP_ITC.2 Import of user data with security attributes, or
FCS_CKM.1 Cryptographic key generation, or
FCS_CKM.5 Cryptographic key derivation]~~

FCS_CKM.6.1 The TSF shall destroy **[plaintext cryptographic keys (including keying material)]** when [selection: *no longer needed*, *assignment: other circumstances for key or keying material destruction*].

Application Note:

The TOE will have mechanisms to destroy keys, including intermediate keys and key material, by using an approved method as specified in FCS_CKM.6.2. Examples of keys include intermediate keys, leaf keys, encryption keys, and signing keys. Key material includes seeds, authentication secrets, passwords, PINs, and other secret values used to derive keys.

This SFR does not apply to the public component of asymmetric key pairs or to keys that are permitted to remain stored, such as device identification keys.

FCS_CKM.6.2 Refinement The TSF shall destroy **plaintext** cryptographic keys and keying material specified by FCS_CKM.6.1 in accordance with a specified cryptographic key destruction method [selection:

- *For volatile storage, the destruction shall be executed by a [selection:*
 - *single overwrite consisting of [selection:*
 - *a pseudo-random pattern using the TSF's RBG,*
 - *zeroes,*
 - *ones,*
 - *a new value of a key,*

- *[assignment: some value that does not contain any CSP],*
- *removal of power to the memory,*
- *removal of all references to the key directly followed by a request for garbage collection];*
- *For nonvolatile storage [selection:*
 - *that consists of an invocation of an interface provided by a part of the TSF, the destruction shall be executed by: [selection:*
 - *logically addressing the storage location of the key and performing a [selection: single, [assignment: number of passes]-pass] overwrite consisting of [selection: a pseudo-random pattern using the TSF's RBG (as specified in FCS_RBG_EXT.1), zeroes, ones, a new value of the key, [assignment: a static or dynamic value that does not contain any CSP]];*
 - *instructing a part of the TSF to destroy the abstraction that represents the key]*
 - *that employs a wear-leveling algorithm, the destruction shall be executed by a [selection:*
 - *single overwrite consisting of [selection: zeroes, ones, pseudo-random pattern, a new value of a key of the same size, [assignment: some value that does not contain any CSP]],*
 - *block erase];*
 - *that does not employ a wear-leveling algorithm, the destruction shall be executed by a [selection:*
 - *[selection: single, [assignment: ST author defined multi-pass]] overwrite consisting of [selection: zeros, ones, pseudo-random pattern, a new value of a key of the same size, [assignment: some value that does not contain any CSP]] followed by a read-verify. If the read-verification of the overwritten data fails, the process shall be repeated up to [assignment: number of times to attempt overwrite] times, whereupon an error is returned.*
 - *block erase]]*

] that meets the following: **[no standard]**.

Application Note:

In the case of volatile memory, the selection “removal of all references to the key directly followed by a request for garbage collection” is used in a situation where the TSF cannot address the specific physical memory locations holding the data to be erased and therefore relies on addressing logical addresses (which frees the relevant physical addresses holding the old data) and then requesting the platform to ensure that the data in the physical addresses is no longer available for reading (i.e. the “garbage collection” referred to in the SFR text).

The selection for destruction of data in nonvolatile memory includes block erase as an option, and this option applies only to flash memory. A block erase does not require a read verify, since the mappings of logical addresses to the erased memory locations are erased, as well as the data itself.

Some selections allow the assignment of “some value that does not contain any CSP.” This means that the TOE uses some specified data not drawn from an RBG meeting FCS_RBG_EXT requirements, and not being any of the values listed as other selection options. The point of the phrase “does not contain any CSP” is to ensure that the overwritten data is carefully selected, and not taken from a general pool that might contain data that itself requires confidentiality protection.

The interface provided by the underlying platform referenced in the requirement could take different forms, such as an application programming interface to an OS kernel, a flash driver, a protected storage device, etc. As an illustrative example, the protected storage device is capable of destroying keys/secrets in the protected storage device upon request that is authorized by the protected storage device. The level of detail to which the TOE has access will be reflected in the TSS section of the ST. Examples of a protected storage device include Secure Elements (SE), Trusted Platform Modules (TPM), Hardware Security Modules (HSM), Trusted Execution Environments (TEE), Secure Enclave Processors (SEP), and so on.

5.3.5. FCS_COP.1/DataEncryption Cryptographic Operation (Data Encryption/Decryption)

(for O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

~~FDP_ITC.1 Import of user data without security attributes, or~~
~~FDP_ITC.2 Import of user data with security attributes, or~~
~~FCS_CKM.1/SKG Cryptographic Key Generation (Symmetric Keys), or~~
~~FCS_CKM.5 Cryptographic key derivation]~~
 FCS_CKM.6 Timing and event of cryptographic key destruction

FCS_COP.1.1/DataEncryption The TSF shall perform [encryption/decryption] in accordance with specified cryptographic algorithms [selection:

- *AES used in [selection:*
 - *CBC mode with non-repeating and unpredictable IVs,*
 - *CTR mode with a non-repeating initial counter and no repeated use of counter values across multiple messages with the same secret key,*
 - *XTS mode with unique tweak values that are consecutive non-negative integers starting at an arbitrary non-negative integer,*
 - *GCM mode with non-repeating IVs using [selection: deterministic, RBG-based] IV construction; the tag must be of length [selection: 96, 104, 112, 120, 128] bits,*
 - *CCM mode with unpredictable, non-repeating nonce, minimum size of 64 bits,*
 - *KW mode,*
 - *KWP mode],*
- *SEED operating in [selection:*
 - *CBC mode with non-repeating and unpredictable IVs,*
 - *CFB mode with non-repeating and unpredictable IVs,*
 - *OFB mode with unique IVs,*
 - *CTR mode with unique, incremental counter,*

- *CCM mode with unpredictable, non-repeating nonce, minimum size of 64 bits,*
- *GCM mode with non-repeating IVs],*
- *HIGHT operating in [selection:*
 - *CBC mode with non-repeating and unpredictable IVs,*
 - *CFB mode with non-repeating and unpredictable IVs,*
 - *OFB mode with unique IVs,*
 - *CTR mode with unique, incremental counter],*
- *LEA operating in [selection:*
 - *CBC mode with non-repeating and unpredictable IVs,*
 - *CFB mode with non-repeating and unpredictable IVs,*
 - *OFB mode with unique IVs,*
 - *CTR mode with unique, incremental counter,*
 - *CCM mode with unpredictable, non-repeating nonce, minimum size of 64 bits,*
 - *GCM mode with non-repeating IVs]*

] and cryptographic key sizes [selection:

Case: AES algorithm

- *128 bits, 192 bits, 256 bits, 512 bits,*

Case: SEED algorithm

- *128 bits,*

Case: HIGHT algorithm

- *128 bits,*

Case: LEA algorithm

- *128 bits, 192 bits, 256 bits*

] that meet the following [selection:

Case: AES algorithm

- *ISO 18033-3,*
 - *[selection: CBC as specified in ISO 10116, CTR as specified in ISO 10116, GCM as specified in ISO 19772],*
- *FIPS PUB 197 (AES),*
 - *[selection: CBC as specified in NIST SP 800-38A, CTR as specified in NIST SP 800-38A, XTS as specified in NIST SP 38-E, GCM as specified in NIST SP 800-38D, CCM as specified in NIST SP 800-38C, KW as specified in NIST SP 800-38F, KWP as specified in NIST SP 800-38F],*

Case: SEED algorithm

- *ISO/IEC 18033-3:2010, Subclause 5.4 “SEED”,*
- [selection:
 - *ISO/IEC 10116:2017, Clause 7 “CBC”,*
 - *ISO/IEC 10116:2017, Clause 8 “CFB”,*
 - *ISO/IEC 10116:2017, Clause 9 “OFB”,*
 - *ISO/IEC 10116:2017, Clause 10 “CTR”,*
 - *ISO/IEC 19772:2009, Clause 8 “CCM”,*
 - *ISO/IEC 19772:2009, Clause 11 “GCM” and NIST SP800-38D],*

Case: HIGHT algorithm

- *ISO/IEC 18033-3:2010, Subclause 4.5 “HIGHT”,*
- [selection:
 - *ISO/IEC 10116:2017, Clause 7 “CBC”,*
 - *ISO/IEC 10116:2017, Clause 8 “CFB”,*
 - *ISO/IEC 10116:2017, Clause 9 “OFB”,*
 - *ISO/IEC 10116:2017, Clause 10 “CTR”],*

Case: LEA algorithm

- *ISO/IEC 29192-2:2019, Subclause 6.3 “LEA”,*
- [selection:
 - *ISO/IEC 10116:2017, Clause 7 “CBC”,*
 - *ISO/IEC 10116:2017, Clause 8 “CFB”,*
 - *ISO/IEC 10116:2017, Clause 9 “OFB”,*
 - *ISO/IEC 10116:2017, Clause 10 “CTR”,*
 - *ISO/IEC 19772:2009, Clause 8 “CCM”,*
 - *ISO/IEC 19772:2009, Clause 11 “GCM” and NIST SP800-38D]*

]

Application Note:

For the first selection of FCS_COP.1.1/DataEncryption, the ST author chooses the mode or modes in which AES, SEED, HIGHT, or LEA operates. For the second selection, the ST author chooses the key sizes that are supported by this functionality. The modes and key sizes selected here correspond to the cipher suite selections made in the trusted channel requirements.

If either SEED in GCM mode with non-repeating IVs or LEA in GCM mode with non-repeating IVs is selected, IV length must be equal to 96 bits, the deterministic IV construction method [SP800-38D,

Section 8.2.1] must be used, and the MAC length t must be one of the values 96, 104, 112, 120, and 128 bits.

5.3.6. FCS_COP.1/SigGen Cryptographic Operation (Signature Generation and Verification)

(for O.UPDATE_VERIFICATION, O.COMMS_PROTECTION, O.STRONG_CRYPT0)

Hierarchical to:

No other components.

Dependencies:

FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys),

FCS_CKM.6 Timing and event of cryptographic key destruction

FCS_COP.1.1/SigGen The TSF shall perform [cryptographic signature services (generation and verification)] in accordance with a specified cryptographic algorithm [selection:

- *RSA Digital Signature Algorithm and cryptographic key sizes (modulus) [assignment: 2048 bits or greater],*
- *Elliptic Curve Digital Signature Algorithm and cryptographic key sizes [assignment: 256 bits or greater],*
- *Korean Certificate-based Digital Signature Algorithm (KCDSA) using [selection: SHA-224, SHA-256, SHA-384, SHA-512] with key size of 2048 bits,*
- *Elliptic Curve KCDSA (EC-KCDSA) on [selection: NIST P-224, NIST P-256, NIST B-233, NIST B-283, NIST K-233, NIST K-283] using [selection: SHA-224, SHA-256, SHA-384, SHA-512] with key size of [selection: 224 bits, 256 bits]*
- *Module-Lattice-based Digital Signature Algorithm using parameter set ML-DSA-87*
- *Leighton-Micali Signature (LMS) scheme with parameters:*
 - *Private key size = [selection: 192 bits with [selection: SHA-256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]]*
 - *Winternitz parameter = [selection: 1, 2, 4, 8]*
 - *Tree height = [selection: 5, 10, 15, 20, 25]*
- *eXtended Merkle Signature Scheme (XMSS) with parameters:*
 - *Private key size = [selection: 192 bits with [selection: SHA-256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]]*
 - *Tree height = [selection: 10, 16, 20]*

] that meet the following: [selection:

Case: RSA schemes

- *FIPS PUB 186-4, “Digital Signature Standard (DSS)”, Section 5.5, using PKCS #1 v2.1 Signature Schemes RSASSA-PSS and/or RSASSA-PKCS1v1_5; ISO/IEC 9796-2, Digital signature scheme 2 or*

Digital Signature scheme 3; RFC 8017 (Section 8.2) [PKCS #1 v2.2], FIPS PUB 186-5 (Section 5.4) [RSASSA-PKCS1-v1_5].

Case: Elliptic Curve Digital Signature Algorithm schemes

- *FIPS PUB 186-5, “Digital Signature Standard (DSS)”, Section 6 and Appendix A,*
- *Implementing “NIST curves” [selection: P-256, P-384, P-521]; ISO/IEC 14888-3, Section 6.4*

Case: Korean Certificate-based Digital Signature Algorithm

- *ISO/IEC 14888-3:2018 (Subclause 6.3), “Digital signatures with appendix - Part 3: Discrete logarithm based mechanisms”,*
- *ISO/IEC 10118-3:2018 (Clause 10, 14), “Hash-functions – Part 3: Dedicated hash-functions”*

Case: Elliptic Curve Korean Certificate-based Digital Signature Algorithm

- *ISO/IEC 14888-3:2018 (Subclause 6.7), “Digital signatures with appendix - Part 3: Discrete logarithm based mechanisms”,*
- *FIPS PUB 186-4 (Appendix D.1.2, D.1.3), “Digital Signature Standard”,*
- *The TSF shall implement “NIST curves” [selection: P-224, P-256, B-233, B-283, K-233, K-283] (as defined in FIPS PUB 186-4, “Digital Signature Standard”),*
- *ISO/IEC 10118-3:2018 (Clause 10, 14), “Hash-functions – Part 3: Dedicated hash-functions”*

Case: ML-DSA Schemes

- *NIST FIPS 204 (Section 5.2)*

Case: LMS Schemes

- *RFC 8554, “Leighton-Micali Hash-Based Signatures”*
- *NIST SP 800-208, “Recommendation for Stateful Hash-Based Signature Schemes”*

Case: XMSS Schemes

- *RFC 8391, “XMSS: eXtended Merkle Signature Scheme”*
- *NIST SP 800-208, “Recommendation for Stateful Hash-Based Signature Schemes”*

].

Application Note:

The ST Author chooses the algorithm(s) implemented to perform digital signatures. For the algorithm(s) chosen, the ST author makes the appropriate assignments/selections to specify the parameters that are implemented for that algorithm. The ST author ensures that the assignments and selections for this SFR include all the parameter values necessary for the cipher suites selected for the protocol SFRs (see [Section A.3, “Protected Communications”](#)) that are included in the ST. The ST Author checks for consistency of selections with other FCS requirements, especially when supporting elliptic curves.

5.3.7. FCS_COP.1/Hash Cryptographic Operation (Hash Algorithm)

(for O.UPDATE_VERIFICATION, O.FW_INTEGRITY, O.STORAGE_ENCRYPTION,
O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

~~[FDP_ITC.1 Import of user data without security attributes, or
FDP_ITC.2 Import of user data with security attributes, or
FCS_CKM.1 Cryptographic key generation, or
FCS_CKM.5 Cryptographic key derivation]
FCS_CKM.6 Timing and event of cryptographic key destruction~~

FCS_COP.1.1/Hash Refinement: The TSF shall perform [cryptographic hashing services] in accordance with a specified cryptographic algorithm [selection: *SHA-1, SHA-256, SHA-384, SHA-512*] and cryptographic key sizes [assignment: ~~cryptographic key sizes~~] **message digest sizes [selection: 160, 256, 384, 512] bits** that meet the following: [selection: *ISO/IEC 10118-3:2004, FIPS PUB 180-4*].

Application Note:

Developers are strongly encouraged to implement updated protocols that support the SHA-2 family; until updated protocols are supported, this cPP allows support for SHA-1 implementations in compliance with SP 800-131A. In a future version of this cPP, SHA-256 will be the minimum requirement for all TOEs.

The hash selection should be consistent with the overall strength of the algorithm used for FCS_COP.1/DataEncryption and FCS_COP.1/SigGen (for example, SHA 256 for 128-bit keys).

5.3.8. FCS_RBG_EXT.1 Random Bit Generation

(for O.STORAGE_ENCRYPTION, O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FCS_RBG_EXT.1.1 The TSF shall perform all deterministic random bit generation services in accordance with ISO/IEC 18031:2011 using [selection: *Hash_DRBG (any), HMAC_DRBG (any), CTR_DRBG ([selection: AES, SEED, HIGHT, LEA])*].

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by at least one entropy source that accumulates entropy from [selection: [assignment: *number of firmware/software-based sources*] *firmware/software-based noise source*, [assignment: *number of hardware-based sources*] *hardware-based noise source*] with a minimum of [selection: *128 bits, 192 bits, 256 bits*] of entropy at least equal to the greatest security strength, according to ISO/IEC 18031:2011 Table C.1 “Security Strength

Table for Hash Functions”, of the keys and hashes that it will generate.

Application Note:

For the first selection in FCS_RBG_EXT.1.2, the ST author selects at least one of the types of noise sources. If the TOE contains multiple noise sources of the same type, the ST author fills the assignment with the appropriate number for each type of source (e.g., 2 firmware/software-based noise sources, 1 hardware-based noise source). The documentation and tests required in the Evaluation Activity for this element should be repeated to cover each source indicated in the ST.

ISO/IEC 18031:2011 contains three different methods of generating random numbers; each of these, in turn, depends on underlying cryptographic primitives (hash functions/ciphers). The ST author will select the function used and include the specific underlying cryptographic primitives used in the requirement. While any of the identified hash functions (SHA-1, SHA-224, SHA-256, SHA-384, SHA-512) are allowed for Hash_DRBG or HMAC_DRBG, any of the block ciphers-based (AES, SEED, HIGHT, LEA) implementations for CTR_DRBG are allowed.

If the key length for the AES implementation used here is different than that used to encrypt the user data, then FCS_COP.1/DataEncryption may have to be adjusted or iterated to reflect the different key length. For the selection in FCS_RBG_EXT.1.2, the ST author selects the minimum number of bits of entropy that is used to seed the RBG, which must be equal or greater than the security strength of any key generated by the TOE.

5.4. User Data Protection (FDP)

Application Note:

The User Data Access Control SFP is composed of Table 4, Table 5, FDP_ACC.1, FDP_ACF.1, FMT_MSA.1, and FMT_MSA.3.

5.4.1. FDP_ACC.1 Subset access control

(for O.ACCESS_CONTROL and O.USER_AUTHORIZATION)

Hierarchical to:

No other components.

Dependencies:

FDP_ACF.1 Security attribute based access control

FDP_ACC.1.1 Refinement: The TSF shall enforce the **User Data Access Control SFP** on subjects, objects, and operations among subjects and objects specified in **Table 4 and Table 5**.

5.4.2. FDP_ACF.1 Security attribute based access control

(for O.ACCESS_CONTROL and O.USER_AUTHORIZATION)

Hierarchical to:

No other components.

Dependencies:

FDP_ACC.1 Subset access control

FMT_MSA.3 Static attribute initialization

FDP_ACF.1.1 Refinement: The TSF shall enforce the **User Data Access Control SFP** to objects based on the following: subjects, objects, and attributes specified in **Table 4** and **Table 5**.

FDP_ACF.1.2 Refinement: The TSF shall enforce the following rules to determine if an operation among controlled subjects and controlled objects is allowed: [rules governing access among controlled subjects and controlled objects using controlled operations on controlled objects specified in **Table 4** and **Table 5**].

FDP_ACF.1.3 Refinement: The TSF shall explicitly authorise access of subjects to objects based on the following additional rules: [assignment: rules *that do not conflict with the User Data Access Control SFP*, based on security attributes, that explicitly authorise access of subjects to objects].

FDP_ACF.1.4 Refinement: The TSF shall explicitly deny access of subjects to objects based on the following additional rules: [assignment: rules *that do not conflict with the User Data Access Control SFP*, based on security attributes, that explicitly deny access of subjects to objects].

Table 4. D.USER.DOC Access Control SFP

PRINT	"Create"	"Read"	"Modify"	"Delete"
Operation:	Submit a document to be printed	View image or Release printed output	Modify stored document	Delete stored document
Job owner	(note 1)			
U.ADMIN				
U.NORMAL		denied	denied	denied
Unauthenticated	(condition 1)	denied	denied	denied

SCAN	"Create"	"Read"	"Modify"	"Delete"
Operation:	Submit a document for scanning	View scanned image	Modify stored image	Delete stored image
Job owner	(note 2)			
U.ADMIN				
U.NORMAL		denied	denied	denied
Unauthenticated	denied	denied	denied	denied

COPY	"Create"	"Read"	"Modify"	"Delete"
-------------	----------	--------	----------	----------

Operation:	Submit a document for copying	View scanned image or Release printed copy output	Modify stored image	Delete stored image
Job owner	(note 2)			
U.ADMIN				
U.NORMAL		denied	denied	denied
Unauthenticated	denied	denied	denied	denied

FAX SEND	"Create"	"Read"	"Modify"	"Delete"
Operation:	Submit a document to send as a fax	View scanned image	Modify stored image	Delete stored image
Job owner	(note 2)			
U.ADMIN				
U.NORMAL		denied	denied	denied
Unauthenticated	denied	denied	denied	denied

FAX RECEIVE	"Create"	"Read"	"Modify"	"Delete"
Operation:	Receive a fax and store it	View fax image or Release printed fax output	Modify image of received fax	Delete image of received fax
Fax owner	(note 3)			
U.ADMIN	(note 4)			
U.NORMAL	(note 4)	denied	denied	denied
Unauthenticated		denied	denied	denied

STORAGE/RETRIEVAL	"Create"	"Read"	"Modify"	"Delete"
Operation:	Store document	Retrieve stored document	Modify stored document	Delete stored document
Job owner	(note 1)			
U.ADMIN				
U.NORMAL		denied	denied	denied
Unauthenticated	(condition 1)	denied	denied	denied

Table 5. D.USER.JOB Access Control SFP

PRINT	"Create" *	"Read"	"Modify"	"Delete"
--------------	------------	--------	----------	----------

Operation:	Create print job	View print queue / job	Modify print job	Cancel print job
Job owner	(note 1)			
U.ADMIN				
U.NORMAL			denied	denied
Unauthenticated			denied	denied

SCAN	"Create" *	"Read"	"Modify"	"Delete"
Operation:	Create scan job	View scan status / log	Modify scan job	Cancel scan job
Job owner	(note 2)			
U.ADMIN				
U.NORMAL			denied	denied
Unauthenticated	denied		denied	denied

COPY	"Create" *	"Read"	"Modify"	"Delete"
Operation:	Create copy job	View copy status / log	Modify copy job	Cancel copy job
Job owner	(note 2)			
U.ADMIN				
U.NORMAL			denied	denied
Unauthenticated	denied		denied	denied

FAX SEND	"Create" *	"Read"	"Modify"	"Delete"
Operation:	Create fax send job	View fax job queue / log	Modify fax send job	Cancel fax send job
Job owner	(note 2)			
U.ADMIN				
U.NORMAL			denied	denied
Unauthenticated	denied		denied	denied

FAX RECEIVE	"Create" *	"Read"	"Modify"	"Delete"
Operation:	Create fax receive job	View fax receive status / log	Modify fax receive job	Cancel fax receive job
Fax owner	(note 3)			
U.ADMIN	(note 4)			
U.NORMAL	(note 4)		denied	denied

Unauthenticated			denied	denied
STORAGE/RETRIEVAL	"Create" *	"Read"	"Modify"	"Delete"
Operation:	Create storage / retrieval job	View storage / retrieval log	Modify storage / retrieval job	Cancel storage / retrieval job
Job owner	(note 1)			
U.ADMIN				
U.NORMAL			denied	denied
Unauthenticated	(condition 1)		denied	denied

Application Note:

In general, the ST Author may modify this SFP provided that any changes are more restrictive. As examples, the ST Author may: remove the rules related to Document Processing functions that are not present in a TOE, add or modify rules to further deny access, or subdivide User Data to further restrict access for some data (e.g., D.USER.JOB.PROT and D.USER.JOB.CONF). Empty cells in the table indicate that the operation may be permitted, but it is not required to be permitted.

In particular, referring to Table 4 and Table 5:

- A cell marked "Denied" indicates that the user (row) must not be permitted to perform the operation (column). The ST Author cannot override this.
- A cell that is blank indicates that the user may be permitted to perform the operation. However, the ST author may add conditions or restrictions, or deny permission entirely.
- A cell that is marked with a Condition means that the user can be permitted to perform the operation, provided that it meets that Condition as specified below. As with blank cells, the ST author can make it more restrictive.

Condition 1: Jobs submitted by unauthenticated users must contain a credential that the TOE can use to identify the Job Owner.

See also the following Notes that are referenced in Table 4 and Table 5:

Note 1: Job Owner is identified by a credential or assigned to an authorized User as part of the process of submitting a print or storage Job.

Note 2: Job Owner is assigned to an authorized User as part of the process of initiating a scan, copy, fax send, or retrieval Job.

Note 3: Job Owner of received faxes is assigned by default or configuration. Minimally, ownership of received faxes is assigned to a specific user or U.ADMIN role.

Note 4: PSTN faxes are received from outside of the TOE, they are not initiated by Users of the TOE.

5.5. Identification and Authentication (FIA)

5.5.1. FIA_ATD.1 User attribute definition

(for O.USER_AUTHORIZATION)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FIA_ATD.1.1 The TSF shall maintain the following list of security attributes belonging to individual users: [assignment: *list of security attributes*].

Application Note:

The list of security attributes should be the union of all attributes for each of the supported authentication methods.

5.5.2. FIA_PMG_EXT.1 Extended: Password Management

(for O.USER_I&A)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FIA_PMG_EXT.1.1 The TSF shall provide the following password management capabilities for User passwords:

- Passwords shall be able to be composed of any combination of upper and lower case letters, numbers, and the following special characters: [selection: “!”, “@”, “#”, “\$”, “%”, “^”, “&”, “*”, “(”, “)”, [assignment: *other characters*]];
- Minimum password length shall be settable by an Administrator, and have the capability to require passwords of 15 characters or greater;

Application Note:

This SFR applies only to password-based single-factor Internal Authentication.

5.5.3. FIA_UAU.1 Timing of authentication

(for O.USER_I&A)

Hierarchical to:

No other components.

Dependencies:

FIA_UID.1 Timing of identification

FIA_UAU.1.1 Refinement: The TSF shall allow [assignment: *list of TSF mediated actions **that do not conflict with the User Data Access Control SFP, and do not provide access to D.TSF.CONF, and do not change any TSF data***] on behalf of the user to be performed before the user is authenticated.

FIA_UAU.1.2 The TSF shall require each user to be successfully authenticated before allowing any other TSF-mediated actions on behalf of that user.

Application Note:

User authentication may be performed internally by the TOE or externally by an External IT Entity.

5.5.4. FIA_UAU.7 Protected authentication feedback

(for O.USER_I&A)

Hierarchical to:

No other components.

Dependencies:

FIA_UAU.1 Timing of authentication

FIA_UAU.7.1 The TSF shall provide only [assignment: *list of feedback*] to the user while the authentication is in progress.

Application Note:

FIA_UAU.7 applies only to authentication processes in which the User interacts with the TOE.

5.5.5. FIA_UID.1 Timing of identification

(for O.USER_I&A and O.ADMIN_ROLES)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FIA_UID.1.1 Refinement: The TSF shall allow [assignment: *list of TSF-mediated actions **that do not conflict with the User Data Access Control SFP, and do not provide access to D.TSF.CONF, and do not change any TSF data***] on behalf of the user to be performed before the user is identified.

FIA_UID.1.2 The TSF shall require each user to be successfully identified before allowing any other

TSF-mediated actions on behalf of that user.

Application Note:

User identification may be performed internally by the TOE or externally by an External IT Entity.

5.5.6. FIA_USB.1 User-subject binding

(for O.USER_I&A)

Hierarchical to:

No other components.

Dependencies:

FIA_ATD.1 User attribute definition

FIA_USB.1.1 The TSF shall associate the following user security attributes with subjects acting on the behalf of that user: [assignment: *list of user security attributes*].

FIA_USB.1.2 The TSF shall enforce the following rules on the initial association of user security attributes with subjects acting on the behalf of users: [assignment: *rules for the initial association of attributes*].

FIA_USB.1.3 The TSF shall enforce the following rules governing changes to the user security attributes associated with subjects acting on the behalf of users: [assignment: *rules for the changing of attributes*].

5.6. Security Management (FMT)

5.6.1. FMT_MOF.1 Management of security functions behavior

(for O.ADMIN_ROLES)

Hierarchical to:

No other components.

Dependencies:

FMT_SMR.1 Security roles

FMT_SMF.1 Specification of Management Functions

FMT_MOF.1.1: The TSF shall restrict the ability to [selection: *determine the behaviour of, disable, enable, modify the behaviour of*] the functions [assignment: *list of functions*] to [U.ADMIN].

5.6.2. FMT_MSA.1 Management of security attributes

(for O.ACCESS_CONTROL and O.USER_AUTHORIZATION)

Hierarchical to:

No other components.

Dependencies:

[FDP_ACC.1 Subset access control, ~~or FDP_IFC.1 Subset information flow control~~]
 FMT_SMR.1 Security roles
 FMT_SMF.1 Specification of Management Functions

FMT_MSA.1.1 The TSF shall enforce the [User Data Access Control SFP] to restrict the ability to [selection: *change_default*, *query*, *modify*, *delete*, [assignment: *other operations*]] the security attributes [assignment: *list of security attributes*] to [assignment: *the authorized identified roles*].

5.6.3. FMT_MSA.3 Static attribute initialization

(for O.ACCESS_CONTROL and O.USER_AUTHORIZATION)

Hierarchical to:

No other components.

Dependencies:

FMT_MSA.1 Management of security attributes
 FMT_SMR.1 Security roles

FMT_MSA.3.1 The TSF shall enforce the [User Data Access Control SFP] to provide [selection, choose one of: *restrictive*, *permissive*, [assignment: *other property*]] default values for security attributes that are used to enforce the SFP.

FMT_MSA.3.2 The TSF shall allow the [selection: *U.ADMIN*, *no role*] to specify alternative initial values to override the default values when an object or information is created.

Application Note:

FMT_MSA.3.2 applies only to security attributes whose default values can be overridden.

5.6.4. FMT_MTD.1 Management of TSF data

(for O.ACCESS_CONTROL)

Hierarchical to:

No other components.

Dependencies:

FMT_SMR.1 Security roles
 FMT_SMF.1 Specification of Management Functions

FMT_MTD.1.1 Refinement: The TSF shall restrict the ability to **perform the specified operations on the specified TSF Data to the roles specified in Table 6.**

Table 6. Management of TSF Data

Data	Operation	Authorized role(s)
------	-----------	--------------------

[assignment: list of TSF Data owned by a U.NORMAL or associated with Documents or jobs owned by a U.NORMAL]	[selection: change default, query, modify, delete, clear, [assignment: other operations]]	U.ADMIN, the owning U.NORMAL.
[assignment: list of TSF Data not owned by a U.NORMAL]	[selection: change default, query, modify, delete, clear, [assignment: other operations]]	U.ADMIN
[assignment: list of software, firmware, and related configuration data]	[selection: change default, query, modify, delete, clear, [assignment: other operations]]	U.ADMIN

5.6.5. FMT_SMF.1 Specification of Management Functions

(for O.USER_AUTHORIZATION, O.ACCESS_CONTROL, and O.ADMIN_ROLES)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FMT_SMF.1.1: The TSF shall be capable of performing the following management functions: [assignment: *list of management functions to be provided by the TSF*].

Application Note:

Regarding “management functions provided by the TSF”, the ST Author should consider management functions that support the security objectives of this protection profile.

The management functions should be restricted to the authorized identified role in FMT_MOF.1, FMT_MTD.1, FMT_MSA.1.

The ST Author may identify cases where a security objective is fulfilled without explicit manageability.

For example, the following management functions are categorized by security objectives:

For O.USER_AUTHORIZATION, O.USER_I&A, O.ADMIN_ROLES, O.ACCESS_CONTROL:

- User management (e.g., add/change/remove local user)
- Role management (e.g., assign/deassign role relationship with user)
- Configuring identification and authentication (e.g., selecting between local and external I&A)
- Configuring authorization and access controls (e.g., access control lists for TOE resources)
- Configuring communication with External IT Entities

For O.UPDATE_VERIFICATION:

- Configuring firmware/software updates

For O.COMMS_PROTECTION:

- Configuring network communications
- Configuring the system or network time source

For O.AUDIT:

- Configuring data transmission to audit server
- Configuring the system or network time source
- Configuring internal audit log storage

For O.STORAGE_ENCRYPTION, O.KEY_MATERIAL:

- Configuring and invoking encryption of Nonvolatile Storage Devices

(Optional) For O.IMAGE_OVERWRITE, O.WIPE_DATA:

- Configuring and/or invoking image overwrite functions
- Configuring and/or invoking data purging functions

5.6.6. FMT_SMR.1 Security roles

(for O.ACCESS_CONTROL, O.USER_AUTHORIZATION, and O.ADMIN_ROLES)

Hierarchical to:

No other components.

Dependencies:

FIA_UID.1 Timing of identification

FMT_SMR.1.1 The TSF shall maintain the roles [U.ADMIN, U.NORMAL].

FMT_SMR.1.2 The TSF shall be able to associate users with roles.

5.7. Privacy (FPR)

There are no class FPR requirements.

5.8. Protection of the TSF (FPT)

5.8.1. FPT_SBT_EXT.1 Extended: Secure Boot

(for O.FW_INTEGRITY)

Hierarchical to:

No other components.

Dependencies:

[if selected: FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)],
[if selected: FCS_COP.1/SigGen Cryptographic Operation (for signature generation/verification)],
[if selected: FCS_COP.1/KeyedHash Cryptographic Operation (for keyed-hash message authentication), and/or FCS_COP.1/CMAC Cryptographic Operation (for cipher-based message authentication)]

FPT_SBT_EXT.1.1 The TSF shall contain one or more chains of trust with each chain of trust anchored in an immutable Root of Trust.

FPT_SBT_EXT.1.2 At boot time the TSF shall use the chain(s) of trust to confirm integrity of its firmware/software using a [selection: *hash, digital signature, message authentication*] verification method.

FPT_SBT_EXT.1.3 The TSF shall [selection: *enter maintenance mode, halt boot process, reboot the device, [assignment: another behavior of TOE]*] in the event of a boot time verification failure so that the corrupted firmware/software isn't executed.

FPT_SBT_EXT.1.4 Following failure of verification, the TSF shall provide a mechanism to: [selection: *revert to previous TOE image, reinstall TOE image, perform a factory reset, indicate a need to contact vendor support*].

FPT_SBT_EXT.1.5 The TSF shall contain [selection: *hash data, digital signature data, message authentication code, public key for digital signature, symmetric key for message authentication with confidentiality protection as defined in FPT_SBT_EXT.1.6*] in the Hardware Root of Trust.

FPT_SBT_EXT.1.6 The TSF shall make the symmetric key accessible only to the Hardware Root of Trust.

Application Note:

The 'contact vendor support' may be selected to allow for the vendor to diagnose a failure in the verification carried out by the TOE at start-up. This selection provides a user of the TOE the option to involve the vendor in the resolution of a verification failure if performing the actions specified by any other selection does not change the state of the TOE.

5.8.2. FPT_SKP_EXT.1 Extended: Protection of TSF Data

(for O.COMMS_PROTECTION)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FPT_SKP_EXT.1.1 The TSF shall prevent reading of all pre-shared keys, symmetric keys, and private keys.

Application Note:

The intent of the requirement is that an administrator is unable to read or view the identified keys (stored or ephemeral) through “normal” interfaces. While it is understood that the administrator could directly read memory to view these keys, doing so is not a trivial task and may require substantial work on the part of an administrator. Since the administrator is considered a trusted agent, it is assumed they would not engage in such an activity.

5.8.3. FPT_STM.1 Reliable time stamps

(for O.AUDIT, O.STRONG_CRYPT0)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FPT_STM.1.1 The TSF shall be able to provide reliable time stamps.

Application Note:

The time may be set by a trusted administrator or by a network service (e.g., NTP) from a trusted External IT Entity.

5.8.4. FPT_TST_EXT.1 Extended: TSF testing

(for O.TSF_SELF_TEST)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FPT_TST_EXT.1.1 The TSF shall run a suite of self-tests during initial start-up (and power on) to demonstrate the correct operation of the TSF.

Application Note:

Power-on self-tests may take place before the TSF is operational.

5.8.5. FPT_TUD_EXT.1 Extended: Trusted Update

(for O.UPDATE_VERIFICATION)

Hierarchical to:

No other components.

Dependencies:

[if selected: FCS_COP.1/SigGen Cryptographic Operation (for signature generation/verification)],
[if selected: FIA_X509_EXT.1 X.509 Certificate Validation],
[if selected: FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)]

FPT_TUD_EXT.1.1 The TSF shall provide authorized administrators the ability to query the current version of the TOE firmware/software.

FPT_TUD_EXT.1.2 The TSF shall provide authorized administrators the ability to initiate updates to TOE firmware/software.

FPT_TUD_EXT.1.3 The TSF shall provide a means to verify firmware/software updates to the TOE using [selection: *digital signature, X.509 certificate*] and [selection: *published hash, no other functions*] prior to installing those updates.

Application Note:

FPT_TUD_EXT.1.2 may be interpreted to allow an administrator to “pre-authorize” automatic updates, provided that they are verified according to FPT_TUD_EXT.1.3.

The digital signature mechanism is specified in FCS_COP.1/SigGen. The published hash is generated by one of the functions specified in FCS_COP.1/Hash. It is acceptable to implement both mechanisms.

5.9. Resource Utilization (FRU)

There are no class FRU requirements.

5.10. TOE Access (FTA)

5.10.1. FTA_SSL.3 TSF-initiated termination

(for O.USER_I&A)

Hierarchical to:

No other components.

Dependencies:

FMT_SMR.1 Security roles

FTA_SSL.3.1 The TSF shall terminate an interactive session after a [assignment: *time interval of user inactivity*].

5.11. Trusted Paths/Channels (FTP)

5.11.1. FTP_ITC.1 Inter-TSF trusted channel

(for O.COMMS_PROTECTION, O.AUDIT)

Hierarchical to:

No other components.

Dependencies:

[FCS_IPSEC_EXT.1 Extended: IPsec selected, or

FCS_TLSC_EXT Extended: TLS Client Protocol and/or FCS_TLSS_EXT Extended: TLS Server Protocol, or

FCS_SSHC_EXT Extended: SSH Client Protocol or FCS_SSHS_EXT Extended: SSH Server Protocol, or

FCS_DTLSC_EXT Extended: DTLS Client Protocol and/or FCS_DTLSS_EXT Extended: DTLS Server Protocol, or

FCS_HTTPS_EXT.1 Extended: HTTPS selected].

FTP_ITC.1.1 Refinement: The TSF shall **use** [selection: *IPsec, SSH, TLS, DTLS, TLS/HTTPS*] to provide **a trusted** communication channel between itself and ~~another trusted IT product~~ **authorized IT entities supporting the following capabilities: remote audit server**, [selection: *authentication server, [assignment: other capabilities]*] that is logically distinct from other communication channels and provides assured identification of its end points and protection of the channel data from ~~modification or~~ **disclosure and detection of modification of the channel data**.

FTP_ITC.1.2 Refinement: The TSF shall permit [selection: *the TSF, another trusted IT product*] **the authorized IT entities** to initiate communication via the trusted channel.

FTP_ITC.1.3 Refinement: The TSF shall initiate communication via the trusted channel for ~~[assignment: list of functions for which a trusted channel is required]~~ **[remote audit server** [assignment: *and list of services for which the TSF is able to initiate communications*]].

Application Note:

The assignment in FTP_ITC.1.3 should address the confidentiality and/or integrity requirements for communication of User and TSF Data between the TOE and another IT entity. FTP_TRP.1 is intended to be used for interactive communication between the TOE and remote users.

The intent of the above requirement is to use a cryptographic protocol to protect external communications with authorized IT entities that the TOE interacts with to perform its functions. Protection (by one of the listed protocols) is required at least for communications with the server that collects the audit information. If it communicates with an authentication server (e.g., RADIUS), then the ST author chooses “authentication server” in FTP_ITC.1.1 and this connection must be protected by one of the listed protocols. If other authorized IT entities (e.g., NTP server) are protected, the ST author makes the appropriate assignments (for those entities) and selections (for the protocols that are used to protect those connections). After the ST author has made the selections, they are to select the detailed requirements in [Section A.3, “Protected Communications”](#) corresponding to their protocol selection to put in the ST. To summarize, the connection to an external audit collection server is required to be protected by one of the listed protocols. If an External Authentication server is supported, then it is required to protect that connection with one of the listed protocols. For any other external server, external communications are not required to be protected, but if protection is

claimed, then it must be protected with one of the identified protocols.

While there are no requirements on the party initiating the communication, the ST author lists in the assignment for FTP_ITC.1.3 the services for which the TOE can initiate the communication with the authorized IT entity.

The requirement implies that not only are communications protected when they are initially established, but also on resumption after an outage. It may be the case that some part of the TOE setup involves manually setting up tunnels to protect other communication, and if after an outage the TOE attempts to re-establish the communication automatically with (the necessary) manual intervention, there may be a window created where an attacker might be able to gain critical information or compromise a connection.

5.11.2. FTP_TRP.1/Admin Trusted path (for Administrators)

(for O.COMMS_PROTECTION)

Hierarchical to:

No other components.

Dependencies:

[FCS_IPSEC_EXT.1 Extended: IPsec selected, or

FCS_TLSC_EXT Extended: TLS Client Protocol and/or FCS_TLSS_EXT Extended: TLS Server Protocol, or

FCS_SSHC_EXT Extended: SSH Client Protocol or FCS_SSHS_EXT Extended: SSH Server Protocol, or

FCS_DTLSC_EXT Extended: DTLS Client Protocol and/or FCS_DTLSS_EXT Extended: DTLS Server Protocol, or

FCS_HTTPS_EXT.1 Extended: HTTPS selected].

FTP_TRP.1.1/Admin Refinement: The TSF shall **use** [selection, choose at least one of: *IPsec*, *SSH*, *TLS*, *DTLS*, *TLS/HTTPS*] **to** provide a **trusted** communication path between itself and [remote] ~~users~~ **administrators** that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from [disclosure **and detection of modification of the communicated data**].

FTP_TRP.1.2/Admin Refinement: The TSF shall permit [remote ~~users~~ **administrators**] to initiate communication via the trusted path.

FTP_TRP.1.3/Admin Refinement: The TSF shall require the use of the trusted path for [initial ~~user~~ **administrator** authentication **[and all remote administration actions]**].

Application Note:

This requirement ensures that authorized remote administrators initiate all communication with the TOE via a trusted path, and that all communications with the TOE by remote administrators is performed over this path. The data passed in this trusted communication path are encrypted as defined the protocol chosen in the first selection. The ST author chooses the mechanism or mechanisms supported by the TOE, and then ensures the detailed requirements in [Section A.3](#),

“Protected Communications” corresponding to their selection are copied to the ST if not already present.

Chapter 6. Security Assurance Requirements

The [Chapter 4, Security Objectives](#) for the TOE were constructed to address [Section 3.3, “Threats”](#) identified in the [Chapter 3, Security Problem Definition](#). The [Chapter 5, Security Functional Requirements](#) are a formal instantiation of the [Chapter 4, Security Objectives](#). This cPP identifies the Security Assurance Requirements to frame the extent to which the evaluator assesses the documentation applicable for the evaluation and performs independent testing.

This section lists the set of SARs from CC part 3 that are required in evaluations against this cPP. Individual Evaluation Activities to be performed are specified in [\[SD\]](#).

The general model for evaluation of TOEs against STs written to conform to this cPP is as follows:

After the ST has been approved for evaluation, the ITSEF (IT Security Evaluation Facility) will obtain the TOE, supporting environmental IT (if required), and the administrative/user guides for the TOE. The ITSEF is expected to perform actions mandated by the Common Evaluation Methodology (CEM) for the ASE and ALC SARs. The ITSEF also performs the Evaluation Activities contained within the SD, which are intended to be an interpretation of the other CEM assurance requirements as they apply to the specific technology instantiated in the TOE. The Evaluation Activities that are captured in the SD also provide clarification as to what the developer needs to provide to demonstrate the TOE is compliant with the cPP.

Table 7. Security Assurance Requirements

Assurance Class	Assurance Components
Security Target (ASE)	Conformance Claims (ASE_CCL.1)
	Extended components definition (ASE_ECD.1)
	ST introduction (ASE_INT.1)
	Security objectives (ASE_OBJ.2)
	Derived security requirements (ASE_REQ.2)
	Security Problem Definition (ASE_SPD.1)
	TOE summary specification (ASE_TSS.1)
Development (ADV)	Basic functional specification (ADV_FSP.1)
Guidance documents (AGD)	Operational user guidance (AGD_OPE.1)
	Preparative procedures (AGD_PRE.1)
Life cycle support (ALC)	Labeling of the TOE (ALC_CMC.1)
	TOE CM coverage (ALC_CMS.1)
Tests (ATE)	Independent testing – conformance (ATE_IND.1)
Vulnerability assessment (AVA)	Vulnerability survey (AVA_VAN.1)

6.1. ASE: Security Target

The ST is evaluated as per ASE activities defined in the [\[CEM\]](#). In addition, there may be Evaluation

Activities specified within the [SD] that call for necessary descriptions to be included in the TSS that are specific to the TOE technology type.

[Appendix E, *Entropy Documentation and Assessment*](#) provides a description of the information expected to be provided regarding the quality of entropy in the random bit generator.

Given the criticality of the key management scheme, this cPP requires the developer to provide a detailed description of their key management implementation. This information can be submitted as an appendix to the ST and marked proprietary, as this level of detailed information is not expected to be made publicly available. See [Appendix F, *Key Management Document*](#) for details on the expectation of the developer's Key Management Description.

6.2. ADV: Development

The design information about the TOE is contained in the guidance documentation available to the end user as well as the TSS portion of the ST, and any additional information required by this cPP that is not to be made public (e.g., Entropy Report).

6.2.1. Basic Functional Specification (ADV_FSP.1)

The functional specification describes the TOE Security Functions Interfaces (TSFIs). It is not necessary to have a formal or complete specification of these interfaces. Additionally, because TOEs conforming to this cPP will necessarily have interfaces to the Operational Environment that are not directly invocable by TOE users, there is little point specifying that such interfaces be described in and of themselves since only indirect testing of such interfaces may be possible. For this cPP, the Evaluation Activities for this family focus on understanding the interfaces presented in the TSS in response to the functional requirements and the interfaces presented in the AGD documentation. No additional "functional specification" documentation is necessary to satisfy the Evaluation Activities specified in [SD].

The Evaluation Activities in [SD] are associated with the applicable SFRs; since these are directly associated with the SFRs, the tracing in element ADV_FSP.1.2D is implicitly already done and no additional documentation is necessary.

6.3. AGD: Guidance Documentation

The guidance documents will be provided with the ST. Guidance must include a description of how the IT personnel verifies that the Operational Environment can fulfill its role for the security functionality. The documentation should be in an informal style and readable by the IT personnel.

Guidance must be provided for every operational environment that the product supports as claimed in the ST. This guidance includes:

- instructions to successfully install the TSF in that environment; and
- instructions to manage the security of the TSF as a product and as a component of the larger operational environment; and
- instructions to provide a protected administrative capability.

Guidance pertaining to particular security functionality must also be provided; requirements on such guidance are contained in the Evaluation Activities specified in the [\[SD\]](#).

6.3.1. Operational User Guidance (AGD_OPE.1)

The operational user guidance does not have to be contained in a single document. Guidance to users, administrators and application developers can be spread among documents or web pages.

The developer should review the Evaluation Activities contained in the [\[SD\]](#) to ascertain the specifics of the guidance that the evaluator will be checking for. This will provide the necessary information for the preparation of acceptable guidance.

6.3.2. Preparative Procedures (AGD_PRE.1)

As with the operational guidance, the developer should look to the Evaluation Activities to determine the required content with respect to preparative procedures.

6.4. Class ALC: Life-cycle Support

At the assurance level provided for TOEs conformant to this cPP, life-cycle support is limited to end-user-visible aspects of the life-cycle, rather than an examination of the TOE vendor's development and configuration management process. This is not meant to diminish the critical role that a developer's practices play in contributing to the overall trustworthiness of a product; rather, it is a reflection on the information to be made available for evaluation at this assurance level.

6.4.1. Labelling of the TOE (ALC_CMC.1)

This component is targeted at identifying the TOE such that it can be distinguished from other products or versions from the same vendor and can be easily specified when being procured by an end user.

6.4.2. TOE CM Coverage (ALC_CMS.1)

Given the scope of the TOE and its associated evaluation evidence requirements, the evaluator performs the CEM work units associated with ALC_CMC.1.

6.5. Class ATE: Tests

Testing is specified for functional aspects of the system as well as aspects that take advantage of design or implementation weaknesses. The former is done through the ATE_IND family, while the latter is through the AVA_VAN family. For this cPP, testing is based on advertised functionality and interfaces with dependency on the availability of design information. One of the primary outputs of the evaluation process is the test report as specified in the following requirements.

6.5.1. Independent Testing – Conformance (ATE_IND.1)

Testing is performed to confirm the functionality described in the TSS as well as the operational guidance (includes “evaluated configuration” instructions). The focus of the testing is to confirm

that the requirements specified in Section 5 are being met. The Evaluation Activities in the SD identify the specific testing activities necessary to verify compliance with the SFRs. The evaluator produces a test report documenting the plan for and results of testing, as well as coverage arguments focused on the platform/TOE combinations that are claiming conformance to this cPP.

6.6. Class AVA: Vulnerability Assessment

For the first generation of this cPP, the iTC is expected to survey open sources to discover what vulnerabilities have been discovered in these types of products and provide that content into the AVA_VAN discussion. In most cases, these vulnerabilities will require sophistication beyond that of a basic attacker. This information will be used in the development of future protection profiles.

6.6.1. Vulnerability Survey (AVA_VAN.1)

[\[SD\]](#) provides a guide to the evaluator in performing a vulnerability analysis.

Appendix A: Selection-Based Requirements

A.1. Audit Events for Selection-Based SFRs

Table 8. Selection-Based Auditable Events

Relevant SFR	Auditable Event	Additional Information
FIA_X509_EX T.1	Unsuccessful attempt to validate a certificate	Reason for failure of certificate validation
FIA_X509_EX T.2	None	None
FIA_X509_EX T.3	None	None

Application Note:

The audit event “Unsuccessful attempt to validate a certificate” for FIA_X509_EXT.1 requires the Additional Audit Record Contents of “Reason for failure (of certificate validation).” An error message telling the Security Administrator that ‘something is wrong with the certificate’ is not considered as presenting sufficient information about the ‘reason for failure’, because basic information to resolve the issue is missing from the audit record. The log message should inform the Security Administrator at least about the type of error (e.g., that there is a ‘Trust issue’ with the certificate, e.g., due to failed path validation, in contrast to the use of an ‘expired certificate’). The level of detail that needs to be provided to enable the Security Administrator to fix issues based on the information in audit events usually depends on the complexity of the underlying use case. In simple scenarios with only one underlying root cause a single error message might be sufficient whereas in more complex scenarios the granularity of error messages should be higher. The cPP only specifies a general guidance on the subject to avoid specifying requirements which are not implementation independent.

A.2. Confidential Data on Nonvolatile Storage Devices

A.2.1. FCS_COP.1/StorageEncryption Cryptographic operation (Data Encryption/Decryption)

(selected with FDP_DSK_EXT.1.1, FPT_SBT_EXT.1.5, for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

~~[FDP_ITC.1 Import of user data without security attributes, or
FDP_ITC.2 Import of user data with security attributes, or
FCS_CKM.1/SKG Cryptographic Key Generation (Symmetric Keys), or
FCS_CKM.5 Cryptographic key derivation]~~

FCS_COP.1.1/StorageEncryption The TSF shall perform **[data encryption and decryption]** in accordance with a specified cryptographic algorithm [selection:

- *AES used in [selection:*
 - *CBC mode with non-repeating and unpredictable IVs,*
 - *CTR mode with a non-repeating initial counter and no repeated use of counter values across multiple messages with the same secret key,*
 - *XTS mode with unique tweak values that are consecutive non-negative integers starting at an arbitrary non-negative integer,*
 - *GCM mode with non-repeating IVs using [selection: deterministic, RBG-based] IV construction; the tag must be of length [selection: 96, 104, 112, 120, 128] bits,*
 - *CCM mode with unpredictable, non-repeating nonce, minimum size of 64 bits,*
 - *KW mode,*
 - *KWP mode],*
- *SEED used in [selection:*
 - *CBC mode with non-repeating and unpredictable IVs,*
 - *CFB mode with non-repeating and unpredictable IVs,*
 - *OFB mode with unique IVs,*
 - *CTR mode with unique, incremental counter,*
 - *CCM mode with unpredictable, non-repeating nonce, minimum size of 64 bits,*
 - *GCM mode with non-repeating IVs],*
- *HIGHT used in [selection:*
 - *CBC mode with non-repeating and unpredictable IVs,*
 - *CFB mode with non-repeating and unpredictable IVs,*
 - *OFB mode with unique IVs,*
 - *CTR mode with unique, incremental counter],*
- *LEA used in [selection:*
 - *CBC mode with non-repeating and unpredictable IVs,*
 - *CFB mode with non-repeating and unpredictable IVs,*
 - *OFB mode with unique IVs,*
 - *CTR mode with unique, incremental counter,*
 - *CCM mode with unpredictable, non-repeating nonce, minimum size of 64 bits,*
 - *GCM mode with non-repeating IVs]*

] and cryptographic key sizes [selection:

Case: AES algorithm

- 128 bits, 192 bits, 256 bits, 512 bits,

Case: SEED algorithm

- 128 bits

Case: HIGHT algorithm

- 128 bits

Case: LEA algorithm

- 128 bits, 192 bits, 256 bits

] that meet the following [selection:

Case: AES algorithm

- ISO 18033-3,
 - [selection: CBC as specified in ISO 10116, GCM as specified in ISO/IEC 19772, and XTS as specified in IEEE 1619],
- FIPS PUB 197 (AES),
 - [selection: CBC as specified in NIST SP 800-38A, CTR as specified in NIST SP 800-38A, XTS as specified in NIST SP 38-E, GCM as specified in NIST SP 800-38D, CCM as specified in NIST SP 800-38C, KW as specified in NIST SP 800-38F, KWP as specified in NIST SP 800-38F],

Case: SEED algorithm

- SEED as specified in ISO/IEC 18033-3:2010, [selection: CBC as specified in ISO/IEC 10116:2017 (clause 7), CFB as specified in ISO/IEC 10116:2017 (clause 8), OFB as specified in ISO/IEC 10116:2017 (clause 9), CTR as specified in ISO/IEC 10116:2017 (clause 10), CCM as specified in ISO/IEC 19772:2009 (clause 8), GCM as specified in ISO/IEC 19772:2009 (clause 11) and NIST SP800-38D],

Case: HIGHT algorithm

- HIGHT as specified in ISO/IEC 18033-3:2010, [selection: CBC as specified in ISO/IEC 10116:2017 (clause 7), CFB as specified in ISO/IEC 10116:2017 (clause 8), OFB as specified in ISO/IEC 10116:2017 (clause 9), CTR as specified in ISO/IEC 10116:2017 (clause 10)],

Case: LEA algorithm

- LEA as specified in ISO/IEC 29192-2:2019, [selection: CBC as specified in ISO/IEC 10116:2017 (clause 7), CFB as specified in ISO/IEC 10116:2017 (clause 8), OFB as specified in ISO/IEC 10116:2017 (clause 9), CTR as specified in ISO/IEC 10116:2017 (clause 10), CCM as specified in ISO/IEC 19772:2009 (clause 8), GCM as specified in ISO/IEC 19772:2009 (clause 11) and NIST SP800-38D]

Application Note:

This cPP allows for firmware/software encryption or hardware encryption.

If XTS Mode is selected, a cryptographic key of 256-bit or of 512-bit is allowed as specified in IEEE 1619. XTS-AES key is divided into two AES keys of equal size - for example, AES-128 is used as the underlying algorithm, when 256-bit key and XTS mode are selected. AES-256 is used when a 512-bit key and XTS mode are selected.

If either SEED in GCM mode with non-repeating IVs or LEA in GCM mode with non-repeating IVs is selected, IV length must be equal to 96 bits, the deterministic IV construction method [SP800-38D, Section 8.2.1] must be used, and the MAC length t must be one of the values 96, 104, 112, 120, and 128 bits.

The intent of this requirement is to specify the approved modes that the ST Author may select for encryption of the appropriate information on the Nonvolatile Storage Device. For the first selection, the ST author should indicate the mode or modes supported by the TOE implementation. The second selection indicates the key size to be used, which is identical to that specified for FCS_CKM.1/SKG. The third selection must agree with the mode or modes chosen in the first selection. If multiple modes are supported, it may be clearer in the ST if this component was iterated.

A.2.2. FCS_COP.1/KeyEncap Cryptographic operation (Key Encapsulation)

(selected with FCS_CKM.2.1 for O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

~~[FDP_ITC.1 Import of user data without security attributes, or
FDP_ITC.2 Import of user data with security attributes, or
FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys), or
FCS_CKM.5 Cryptographic key derivation, or
FCS_CKM_EXT.7 Cryptographic key agreement, or
FCS_CKM_EXT.8 Password-based key derivation]
FCS_CKM.6 Timing and event of cryptographic key destruction,
FCS_OTV_EXT.1 One-Time Value].~~

FCS_COP.1.1/KeyEncap: The TSF shall perform key encapsulation in accordance with a specified cryptographic algorithm [selection: cryptographic algorithm] and cryptographic key sizes [selection: cryptographic algorithm parameters] that meet the following: [selection: list of standards].

The following table provides the allowed choices for completion of the selection operations of FCS_COP.1/KeyEncap.

Identifier	Cryptographic Algorithm	Cryptographic Algorithm Parameters	List of Standards
ML-KEM	ML-KEM	Parameter set = ML-KEM-1024	NIST FIPS 203

Application Note

The only anticipated use of key encapsulation is the use of ML-KEM as part of key establishment for trusted communication.

A.2.3. FCS_COP.1/KeyWrap Cryptographic operation (Key Wrapping)

(selected in FCS_KYC_EXT.1.1, for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

~~[FDP_ITC.1 Import of user data without security attributes, or
FDP_ITC.2 Import of user data with security attributes, or
FCS_CKM.1/SKG Cryptographic Key Generation (Symmetric Keys), or
FCS_CKM.5 Cryptographic key derivation]~~
FCS_CKM.6 Timing and event of cryptographic key destruction

FCS_COP.1.1/KeyWrap Refinement: The TSF shall perform **[key wrapping]** in accordance with a specified cryptographic algorithm [selection: *AES in the following modes [selection: KW, KWP, GCM, CCM], SEED in the following modes [selection: KW, KWP, GCM, CCM], LEA in the following modes [selection: KW, KWP, GCM, CCM]*] and the cryptographic key size [selection: *128 bits (AES, SEED, LEA), 192 bits (AES, LEA), 256 bits (AES, LEA)*] that meet the following: [selection:

Case: AES algorithm

- [selection:
 - *ISO/IEC 18033-3 (AES), [selection: NIST SP 800-38F, ISO/IEC 19772, no other standards],*
 - *FIPS PUB 197 (AES), [selection: NIST SP 800-38F (KW,KWP), NIST SP 800-38D (GCM), NIST SP 800-38C (CCM)]*
-]

Case: SEED algorithm

- *[ISO/IEC 18033-3:2010 (SEED), [selection: ISO/IEC 19772:2009, NIST SP 800-38F, sec. 6.3]],*

Case: LEA algorithm

- *[ISO/IEC 29192-2:2019 (LEA), [selection: ISO/IEC 19772:2009, NIST SP 800-38F, sec. 6.3]]*

].

Application Note:

This requirement is used in the body of the ST if the ST Author chooses to use key wrapping in the key chaining approach that is specified in FCS_KYC_EXT.1.

A.2.4. FCS_COP.1/KeyEnc Cryptographic operation (Key Encryption)

(selected from FCS_KYC_EXT.1.1, for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

~~[FDP_ITC.1 Import of user data without security attributes, or
FDP_ITC.2 Import of user data with security attributes, or
FCS_CKM.1/SKG Cryptographic Key Generation (Symmetric Keys), or
FCS_CKM.5 Cryptographic key derivation]~~
FCS_CKM.6 Timing and event of cryptographic key destruction

FCS_COP.1.1/KeyEnc Refinement: The TSF shall perform [key encryption and decryption] in accordance with a specified cryptographic algorithm [selection:

Case: AES algorithm

- *AES used in [[selection: CBC, GCM] mode] and cryptographic key sizes [selection: 128 bits, 192 bits, 256 bits] that meet the following: **AES as specified in [selection: ISO/IEC 18033-3, FIPS PUB 197]**, [selection: CBC as specified in [selection: ISO/IEC 10116, NIST SP 800-38A], GCM as specified in [selection: ISO/IEC 19772, NIST SP 800-38D]],*

Case: SEED algorithm

- *SEED used in [selection: CCM, GCM] and cryptographic key size [selection: 128 bits, 256 bits] that meet the following: **SEED as specified in ISO/IEC 18033-3:2010**, [selection: CCM as specified in ISO/IEC 19772:2009, GCM as specified in ISO/IEC 19772:2009],*

Case: LEA algorithm

- *LEA used in [selection: CCM, GCM] and cryptographic key size [selection: 128 bits, 256 bits] that meet the following: **LEA as specified in ISO/IEC 29192-2:2019**, [selection: CCM as specified in ISO/IEC 19772:2009, GCM as specified in ISO/IEC 19772:2009]*

].

Application Note:

This requirement is used in the body of the ST if the ST Author chooses to use AES encryption/decryption for protecting the keys as part of the key chaining approach that is specified in FCS_KYC_EXT.1.

A.2.5. FCS_COP.1/KeyTransport Cryptographic operation (Key Transport)

(selected in FCS_KYC_EXT.1.1 for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

~~[FDP_ITC.1 Import of user data without security attributes, or
FDP_ITC.2 Import of user data with security attributes, or
FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys), or
FCS_CKM.5 Cryptographic key derivation]~~
FCS_CKM.6 Timing and event of cryptographic key destruction

FCS_COP.1.1/KeyTransport Refinement: The TSF shall perform [key transport] in accordance with a specified cryptographic algorithm [selection:

- RSA in the following modes [selection: *KTS-OAEP*, *KTS-KEM-KWS*] and the cryptographic key size [selection: *2048 bits*, *3072 bits*, *4096 bits*, *6144 bits*, *8192 bits*] that meet the following: [NIST SP 800-56B, Revision 2],
- KEM-DEM Key-Transport Method that meets the following: [NIST SP 800-227 Section 5.2.1] using a key establishment algorithm [ML-KEM] as specified in FCS_CKM.2 and a key wrapping algorithm as specified in FCS_COP.1/KeyWrap]

].

Application Note:

This requirement is used in the body of the ST if the ST Author chooses to use key transport in the key chaining approach that is specified in FCS_KYC_EXT.1.

A.2.6. FCS_SMC_EXT.1 Extended: Submask Combining

(selected in FCS_KYC_EXT.1.1, for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)

FCS_SMC_EXT.1.1 The TSF shall combine submasks using the following method [selection: *exclusive OR (XOR)*, *SHA-256*, *SHA-384*, *SHA-512*, *HMAC-SHA-384*, *HMAC-SHA-512*] to generate an intermediary key, BEV or DEK.

Application Note:

This requirement specifies the way that a product may combine the various submasks by using either an XOR or an approved SHA-hash. The approved hash function is captured in FCS_COP.1/Hash in

A.3. Protected Communications

As indicated in the FTP requirements, there are several methods by which conformant TOEs can mitigate threats against compromise of the communication channel between administrators, other portions of the TOE, or external IT entities. One of the secure communication protocols (IPsec, SSH, TLS, DTLS, TLS/HTTPS) must be implemented in order to provide protected connectivity for (at a minimum) the audit server and remote administrators.

There are unique requirements associated with each of the protocol suites; these are specified in below. Depending on the selections for the FTP_ITC.1 and FTP_TRP.1 components, the ST author will need to include the associated SFRs and Assurance Activities in the ST.

A.3.1. FCS_IPSEC_EXT.1 Extended: IPsec selected

(selected in FTP_ITC.1.1, FTP_TRP.1.1/Admin, FTP_TRP.1.1/NonAdmin, for O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

[if selected: FIA_PSK_EXT.1 Extended: Pre-Shared Key Composition],
FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys),
FCS_CKM.2 Cryptographic Key Establishment,
FCS_COP.1/DataEncryption Cryptographic Operation (Symmetric encryption/decryption),
FCS_COP.1/SigGen Cryptographic Operation (for signature generation/verification),
FCS_COP.1/Hash Cryptographic Operation (Hash Algorithm),
[if selected: FCS_COP.1/KeyedHash Cryptographic Operation (Keyed Hash Algorithm)],
FCS_RBG_EXT.1 Random Bit Generation

Application Note:

The TOE is required to use the IPsec protocol to establish connections used to communicate with an IPsec Peer.

FCS_IPSEC_EXT.1.1 The TSF shall implement the IPsec architecture as specified in RFC 4301.

Application Note:

RFC 4301 calls for an IPsec implementation to protect IP traffic through the use of a Security Policy Database (SPD). The SPD is used to define how IP packets are to be handled: PROTECT the packet (e.g., encrypt the packet), BYPASS the IPsec services (e.g., no encryption), or DISCARD the packet (e.g., drop the packet). The SPD can be implemented in various ways, including router access control lists, firewall rulesets, a ‘traditional’ SPD, etc. Regardless of the implementation details, there is a notion of a ‘rule’ that a packet is ‘matched’ against and a resulting action that takes place.

While there must be a means to order the rules, a general approach to ordering is not mandated, as

long as the SPD can distinguish the IP packets and apply the rules accordingly. There may be multiple SPDs (one for each network interface), but this is not required.

FCS_IPSEC_EXT.1.2 The TSF shall have a nominal, final entry in the SPD that matches anything that is otherwise unmatched and discards it.

FCS_IPSEC_EXT.1.3 The TSF shall implement [selection: *transport mode, tunnel mode*].

Application Note:

The ST author selects the supported modes of operation for IPsec.

FCS_IPSEC_EXT.1.4 The TSF shall implement the IPsec protocol ESP as defined by RFC 4303 using the cryptographic algorithms [selection: *AES-CBC-128 (RFC 3602), AES-CBC-192 (RFC 3602), AES-CBC-256 (RFC 3602), AES-GCM-128 (RFC 4106), AES-GCM-192 (RFC 4106), AES-GCM-256 (RFC 4106)*] together with a Secure Hash Algorithm (SHA)-based HMAC [selection: *HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-384, HMAC-SHA-512, no HMAC algorithm*].

Application Note:

When an AES-CBC algorithm is selected, at least one SHA-based HMAC must also be chosen. If only an AES-GCM algorithm is selected, then a SHA-based HMAC is not required since AES-GCM satisfies both confidentiality and integrity functions. IPsec may utilise a truncated version of the SHA-based HMAC functions contained in the selections. Where a truncated output is utilised, it shall be highlighted in the TSS.

FCS_IPSEC_EXT.1.5 The TSF shall implement the protocol: [selection:

- *IKEv1 using Main Mode for Phase 1 exchanges, as defined in RFCs 2407, 2408, 2409, RFC 4109, [selection: no other RFCs for extended sequence numbers, RFC 4304 for extended sequence numbers], and [selection: no other RFCs for hash functions, RFC 4868 for hash functions];*
- *IKEv2 as defined in RFC 5996 and [selection: with no support for NAT traversal, with mandatory support for NAT traversal as specified in RFC 5996, section 2.23)], and [selection: no other RFCs for hash functions, RFC 4868 for hash functions]*

].

Application Note:

If the TOE implements SHA-2 hash algorithms for IKEv1 or IKEv2, the ST author selects RFC 4868. If the TOE implements the use of truncated SHA-based HMACs as described in RFC 4868, they shall be highlighted in the TSS.

FCS_IPSEC_EXT.1.6 The TSF shall ensure the encrypted payload in the [selection: *IKEv1, IKEv2*] protocol uses the cryptographic algorithms [selection: *AES-CBC-128, AES-CBC-192, AES-CBC-256 (specified in RFC 3602), AES-GCM-128, AES-GCM-256 (specified in RFC 5282)*].

Application Note:

AES-GCM-128 and AES-GCM-256 may only be selected if IKEv2 is also selected, as there is no RFC defining AES-GCM for IKEv1.

FCS_IPSEC_EXT.1.7 The TSF shall ensure that [selection:

- *IKEv1 Phase 1 SA lifetimes can be configured by a Security Administrator based on [selection:*
 - *number of bytes;*
 - *length of time, where the time values can be configured within [assignment: integer range including 24] hours;];*
- *IKEv2 SA lifetimes can be configured by a Security Administrator based on [selection:*
 - *number of bytes;*
 - *length of time, where the time values can be configured within [assignment: integer range including 24] hours;]*

].

Application Note:

The ST author chooses either the IKEv1 requirements or IKEv2 requirements (or both, depending on the selection in FCS_IPSEC_EXT.1.5). The ST author chooses either volume-based lifetimes or time-based lifetimes (or a combination). This requirement must be accomplished by providing Security Administrator-configurable lifetimes (with appropriate instructions in documents mandated by AGD_OPE). Hardcoded limits do not meet this requirement. In general, instructions for setting the parameters of the implementation, including lifetime of the SAs, should be included in the guidance documentation generated for AGD_OPE.

FCS_IPSEC_EXT.1.8 The TSF shall ensure that [selection:

- *IKEv1 Phase 2 SA lifetimes can be configured by a Security Administrator based on [selection:*
 - *number of bytes;*
 - *length of time, where the time values can be configured within [assignment: integer range including 8] hours;];*
- *IKEv2 Child SA lifetimes can be configured by a Security Administrator based on [selection:*
 - *number of bytes;*
 - *length of time, where the time values can be configured within [assignment: integer range including 8] hours;]*

].

Application Note:

The ST author chooses either the IKEv1 requirements or IKEv2 requirements (or both, depending on the selection in FCS_IPSEC_EXT.1.5). The ST author chooses either volume-based lifetimes or time-based lifetimes (or a combination). This requirement must be accomplished by providing Security Administrator-configurable lifetimes (with appropriate instructions in documents mandated by AGD_OPE). Hardcoded limits do not meet this requirement. In general, instructions for setting the parameters of the implementation, including lifetime of the SAs, should be included in the guidance documentation generated for AGD_OPE.

FCS_IPSEC_EXT.1.9 The TSF shall generate the secret value x used in the IKE Diffie-Hellman key exchange (" x " in $g^x \bmod p$) using the random bit generator specified in FCS_RBG_EXT.1, and having a length of at least [assignment: (one or more) number(s) of bits that is at least twice the security strength of the negotiated Diffie-Hellman group] bits.

Application Note:

For DH groups 19 and 20, the 'x' value is the point multiplier for the generator point G.

Since the implementation may allow different Diffie-Hellman groups to be negotiated for use in forming the SAs, the assignment in FCS_IPSEC_EXT.1.9 may contain multiple values. For each DH group supported, the ST author consults Table 2 in NIST SP 800-57 "Recommendation for Key Management –Part 1: General" to determine the security strength ('bits of security') associated with the DH group. Each unique value is then used to fill in the assignment for this element. For example, suppose the implementation supports DH group 14 (2048-bit MODP) and group 20 (ECDH using NIST curve P-384). From Table 2, the bits of security value for group 14 is 112, and for group 20 is 192.

FCS_IPSEC_EXT.1.10 The TSF shall generate nonces used in [selection: IKEv1, IKEv2] protocol exchanges of length [selection:

- *according to the security strength associated with the negotiated Diffie-Hellman group;*
- *at least 128 bits in size and at least half the output size of the negotiated pseudorandom function (PRF) hash*

].

Application Note:

This SFR is for the IKEv1 (phase 1 and phase 2) and IKEv2 (IKE_AUTH and CREATE_CHILD_SA) protocol exchanges.

The ST author must select the second option for nonce lengths if IKEv2 is selected (as this is mandated in RFC 7296). The ST author may select either option for IKEv1.

The security strengths of DH groups are defined in NIST SP 800-57.

Because nonces may be exchanged before the DH group is negotiated, the nonce used should be large enough to support all TOE-chosen proposals in the exchange.

FCS_IPSEC_EXT.1.11 The TSF shall ensure that IKE protocols implement DH Group(s) [selection:

- *[selection: 14 (2048-bit MODP), 15 (3072-bit MODP), 16 (4096-bit MODP), 17 (6144-bit MODP), 18 (8192-bit MODP)] according to RFC 3526,*
- *[selection: 19 (256-bit Random ECP), 20 (384-bit Random ECP), 21 (521-bit Random ECP), 24 (2048-bit MODP with 256-bit POS)] according to RFC 5114.*

].

Application Note:

The selections are used to specify additional DH groups supported. This applies to IKEv1 and IKEv2

exchanges.

FCS_IPSEC_EXT.1.12 The TSF shall be able to ensure by default that the strength of the symmetric algorithm (in terms of the number of bits in the key) negotiated to protect the [selection: *IKEv1 Phase 1, IKEv2 IKE_SA*] connection is greater than or equal to the strength of the symmetric algorithm (in terms of the number of bits in the key) negotiated to protect the [selection: *IKEv1 Phase 2, IKEv2 CHILD_SA*] connection.

Application Note:

The ST author chooses either or both of the IKE selections based on what is implemented by the TOE. Obviously, the IKE version(s) chosen should be consistent not only in this element, but with other choices for other elements in this component. While it is acceptable for this capability to be configurable, the default configuration in the evaluated configuration (either ‘out of the box’ or by configuration guidance in the AGD documentation) must enable this functionality.

FCS_IPSEC_EXT.1.13 The TSF shall ensure that all IKE protocols perform peer authentication using [selection: *RSA, ECDSA*] that use X.509v3 certificates that conform to RFC 4945 and [selection: *Pre-shared Keys, no other method*].

Application Note:

At least one public-key-based Peer Authentication method is required in order to conform to this cPP; one or more of the public key schemes is chosen by the ST author to reflect what is implemented. The ST author also ensures that appropriate FCS requirements reflecting the algorithms used (and key generation capabilities, if provided) are listed to support those methods. Note that the TSS will elaborate on the way in which these algorithms are to be used (for example, RFC 2409 specifies three authentication methods using public keys; each one supported will be described in the TSS).

FCS_IPSEC_EXT.1.14 The TSF shall only establish a trusted channel if the presented identifier in the received certificate matches the configured reference identifier, where the presented and reference identifiers are of the following fields and types: [selection: *SAN: IP address, SAN: Fully Qualified Domain Name (FQDN), SAN: user FQDN, CN: IP address, CN: Fully Qualified Domain Name (FQDN), CN: user FQDN, Distinguished Name (DN)*] and [selection: *no other reference identifier type, [assignment: other supported reference identifier types]*].

Application Note:

When using RSA or ECDSA certificates for peer authentication, the reference and presented identifiers take the form of either a DN, IP address, FQDN or user FQDN. The reference identifier is the identifier the TOE expects to receive from the peer during IKE authentication. The presented identifier is the identifier that is contained within the peer certificate body. The ST author shall select the presented and reference identifier types supported and may optionally assign additional supported identifier types in the second selection. Excluding the DN identifier type (which is necessarily the Subject DN in the peer certificate), the TOE may support the identifier in either the Common Name or Subject Alternative Name (SAN) or both.

The critical requirement of X.509 identifiers is the ability to bind the public key uniquely to an identity. This can be achieved by using strongly-typed identifiers or controlling the CA and certificate issuance. One recommended method for identity verification is supporting the use of the Subject Alternative

Name (SAN) extension using DNS names, URI names, or Service Names. However, the support for a SAN extension is optional as long as identifier uniqueness can be achieved by other means.

In a future version of this cPP, SAN and/or DN support might be required for all TOEs, support for CN might be optional, and the “other supported referenced identifier types” selection might be removed. In a future version of this cPP, it might also be required that the SAN (when present) shall take precedence over CN.

Supported peer certificate algorithms are the same as FCS_IPSEC_EXT.1.13

A.3.2. FCS_TLSC_EXT & FCS_TLSS_EXT TLS Protocol

TLS is not a required component of this cPP. If a TOE implements TLS, a corresponding selection in FTP_ITC.1, FTP_TRP.1/Admin, and/or FTP_TRP.1/NonAdmin should be made to define what the TLS protocol is implemented to protect. If a corresponding option to support TLS has been selected in at least one of the SFRs named above, the corresponding selection-based TLS-related SFRs should be added to the ST from the Functional Package for TLS.

The decision whether to include the support for protocol-level mutual authentication in the scope of the evaluation is regarded as part of the TOE boundary definition. These SFRs can be included in a conforming ST at the discretion of the ST author, even if the conformance statement of the cPP requires exact conformance. It is not mandatory to implement mutually authenticated TLS in order to conform to this cPP. Similarly, this cPP does not mandate or prohibit any other selections that are defined in the Functional Package for TLS.

A TOE may act as the client, the server, or both in TLS sessions. The requirement has been separated into TLS Client (FCS_TLSC_EXT) and TLS Server (FCS_TLSS_EXT) requirements to allow for these differences.

A.3.3. FCS_SSHC_EXT & FCS_SSHS_EXT SSH Protocol

SSH is not a required component of this cPP. If a TOE implements SSH, a corresponding selection in FTP_ITC.1, FTP_TRP.1/Admin, and/or FTP_TRP.1/NonAdmin should have been made that defines what the SSH protocol is implemented to protect.

A TOE may act as the client or the server in an SSH session. The requirement has been separated into SSH Client (FCS_SSHC_EXT) and SSH Server (FCS_SSHS_EXT) requirements to allow for these differences.

A.3.3.1. FCS_SSHC_EXT.1 SSH Client Protocol

(for O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components

Dependencies:

FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)

FCS_CKM.2 Cryptographic Key Establishment

FCS_COP.1/DataEncryption Cryptographic operation (Data Encryption/decryption)

FCS_COP.1/SigGen Cryptographic operation (Signature Generation and Verification)
FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)
FCS_COP.1/KeyedHash Cryptographic operation (Keyed Hash Algorithm)
FCS_RBG_EXT.1 Random Bit Generation

FCS_SSHC_EXT.1.1 The TSF shall implement the SSH protocol in accordance with: RFCs 4251, 4252, 4253, 4254, [selection: 4256, 4344, 5647, 5656, 6187, 6668, 8268, 8308 section 3.1, 8332].

Application Note:

The following mapping is provided as a guide to ST authors to ensure the appropriate RFC selections are made:

- RFC 4256 – Select if keyboard-interactive authentication is available
- RFC 4344 – Select if AES-128-CTR or AES-256-CTR modes are available
- RFC 5647 – Select if AEAD_AES_128_GCM or AEAD_AES_256_GCM are available
- RFC 5656 – Select if elliptical curve cryptography is available
- RFC 6187 – Select if X.509 certificates are available for public key algorithms
- RFC 6668 – Select if HMAC-SHA-2 algorithms are available
- RFC 8268 – Select if FFC DH groups with SHA-2 are available
- RFC 8308 Section 3.1 – Select if RFC 8332 is selected
- RFC 8332 – Select if SHA-2 is available with ssh-rsa selection for public key algorithms

If the negotiated encryption algorithm is one of the [aes-gcm@openssh.com](https://cvsweb.openbsd.org/cgi-bin/cvsweb/src/usr.bin/ssh/PROTOCOL?rev=1.31) algorithms, then the MAC field is ignored during negotiation and implicitly selects AES-GCM for the MAC. However once negotiated the connection is conformant with RFC 5647 and this should be selected when using [aes*-gcm@openssh.com](https://cvsweb.openbsd.org/cgi-bin/cvsweb/src/usr.bin/ssh/PROTOCOL?rev=1.31) algorithms. [aes*-gcm@openssh.com](https://cvsweb.openbsd.org/cgi-bin/cvsweb/src/usr.bin/ssh/PROTOCOL?rev=1.31) is specified in Section 1.6 of the OpenSSH Protocol Specification (<https://cvsweb.openbsd.org/cgi-bin/cvsweb/src/usr.bin/ssh/PROTOCOL?rev=1.31>).*

The ST author selects which of the additional RFCs to which conformance is being claimed. An SSH product can implement additional RFCs, but only those listed in the selection can be claimed as conformant under common criteria. The RFC selections for this requirement need to be consistent with selections in later elements of this Package (e.g., cryptographic algorithms permitted). RFC 4253 indicates that certain cryptographic algorithms are “REQUIRED”. This means that the implementation must include support, not that the algorithms must be enabled for use. Ensuring that algorithms indicated as “REQUIRED” but not listed in the later elements of this component are implemented is out of scope of the evaluation activity for this requirement.

FCS_SSHC_EXT.1.2 The TSF shall ensure that the SSH protocol implementation supports the following user authentication methods as described in RFC 4252: public key-based, [selection: password-based, no other method].

Application Note:

The intent of this element is to specify user authentication mechanism(s) that the TOE supports when

acting as an SSH client. The TOE is required to implement the capability to generate user-based authentication keys in accordance with FCS_CKM.1 as specified by FMT_SMF.1 via “Ability to manage the cryptographic keys”. While no specific public key algorithms are mandatory to implement, the use of public key algorithms must be consistent with FCS_CKM.1, FCS_COP.1/Hash, and FCS_COP.1/SigGen.

If the TOE implements password-based authentication, the option ‘password-based’ must be selected. If the TOE can only authenticate itself with a public key, the option ‘no other method’ must be chosen.

FCS_SSHC_EXT.1.3 The TSF shall ensure that, as described in RFC 4253, packets greater than [assignment: *number of bytes*] bytes in an SSH transport connection are dropped.

Application Note:

RFC 4253 provides for the acceptance of ‘large packets’ with the caveat that the packets should be of ‘reasonable length’ or dropped. The assignment should be filled in by the ST author with the maximum packet size accepted, thus defining ‘reasonable length’ for the TOE.

FCS_SSHC_EXT.1.4 The TSF shall ensure that the SSH transport implementation uses the following encryption algorithms and rejects all other encryption algorithms: [selection: *aes128-cbc*, *aes256-cbc*, *aes128-ctr*, *aes256-ctr*, *AEAD_AES_128_GCM*, *AEAD_AES_256_GCM*, aes128-gcm@openssh.com, aes256-gcm@openssh.com].

Application Note:

RFC 5647 specifies the use of the *AEAD_AES_128_GCM* and *AEAD_AES_256_GCM* algorithms in SSH. As described in RFC 5647, *AEAD_AES_128_GCM* and *AEAD_AES_256_GCM* can only be chosen as encryption algorithms when the same algorithm is being used as the MAC algorithm. Corresponding FCS_COP entries are included in the ST for the algorithms selected here.

FCS_SSHC_EXT.1.5 The TSF shall ensure that the SSH public-key based authentication implementation uses [selection: *ssh-rsa*, *rsa-sha2-256*, *rsa-sha2-512*, *ecdsa-sha2-nistp256*, *x509v3-ssh-rsa*, *ecdsa-sha2-nistp384*, *ecdsa-sha2-nistp521*, *x509v3-ecdsa-sha2-nistp256*, *x509v3-ecdsa-sha2-nistp384*, *x509v3-ecdsa-sha2-nistp521*, *x509v3-rsa2048-sha256*] as its public key algorithm(s) and rejects all other public key algorithms.

Application Note:

The intent of this element is to specify peer (SSH server) authentication mechanism(s) that the TOE supports when acting as an SSH client. The TOE is required to implement the capability to verify the host’s public key as described in RFC 4251 Section 4.1.

If *x509v3-ssh-rsa*, *x509v3-ecdsa-sha2-nistp256*, *x509v3-ecdsa-sha2-nistp384*, *x509v3-ecdsa-sha2-nistp521* or *x509v3-rsa2048-sha256* are selected, then the list of trusted certification authorities must be selected in FCS_SSHC_EXT.1.9 and the FIA_X509_EXT SFRs in [Appendix A, Selection-Based Requirements](#) are applicable.

It is recommended to configure the TOE to reject presented RSA keys with a key length below 2048 bit. RFC 8332 specifies the use of *rsa-sha2-256* or *rsa-sha2-512* in SSH.

Public-key or certificate-based client authentication within the SSH protocol is based on demonstrated possession of a private key matching a public key associated with a given authorized account on a

system.

If x509v3-based authentication is claimed, the ST shall also include the appropriate FIA_X509_EXT SFRs.

SSH client implementations that claim to support x509v3-based public key authentication algorithms are expected to be able to parse server certificates that comply with RFC 6187 Section 4 recommendations.

FCS_SSHC_EXT.1.6 The TSF shall ensure that the SSH transport implementation uses [selection: *hmac-sha1*, *hmac-sha1-96*, *hmac-sha2-256*, *hmac-sha2-512*, *AEAD_AES_128_GCM*, *AEAD_AES_256_GCM*, *implicit*] as its data integrity MAC algorithm(s) and rejects all other MAC algorithm(s).

Application Note:

RFC 5647 specifies the use of the AEAD_AES_128_GCM and AEAD_AES_256_GCM algorithms in SSH. As described in RFC 5647, AEAD_AES_128_GCM and AEAD_AES_256_GCM can only be chosen as MAC algorithms when the same algorithm is being used as the encryption algorithm. RFC 6668 specifies the use of the sha2 algorithms in SSH.

The ST author selects “implicit” when, and only when, aes-gcm@openssh.com is selected as an encryption algorithm. When aes*-gcm@openssh.com is negotiated as the encryption algorithm, the MAC algorithm field is ignored and GCM is implicitly used as the MAC. “implicit” is not an SSH algorithm identifier and will not be seen on the wire; however, the negotiated MAC might be decoded as “implicit”.*

FCS_SSHC_EXT.1.7 The TSF shall ensure that [selection: *diffie-hellman-group14-sha1*, *diffie-hellman-group15-sha512*, *ecdh-sha2-nistp256*] and [selection: *diffie-hellman-group14-sha256*, *diffie-hellman-group16-sha512*, *diffie-hellman-group17-sha512*, *diffie-hellman-group18-sha512*, *ecdh-sha2-nistp384*, *ecdh-sha2-nistp521*, *no other methods*] are the only allowed key exchange methods used for the SSH protocol.

FCS_SSHC_EXT.1.8 The TSF shall ensure that within SSH connections, the same session keys are used for a threshold of no longer than one hour, and each encryption key is used to protect no more than one gigabyte of data. After any of the thresholds are reached, a rekey needs to be performed.

Application Note:

This SFR defines two thresholds - one for the maximum time span the same session keys can be used and the other one for the maximum amount of data that can be transmitted using the same session keys. Both thresholds need to be implemented and a rekey needs to be performed on whichever threshold is reached first. For the maximum transmitted data threshold, the encrypted traffic per encryption key needs to be counted. It is also acceptable to count the totally transmitted data per encryption key, the total encrypted traffic for incoming and outgoing data or the total transmitted incoming and outgoing data because the encrypted traffic per encryption key will always be lower or equal to the other options. The rekey requirement applies to all session keys (encryption, integrity protection) for incoming and outgoing traffic.

It is acceptable for a TOE to implement lower thresholds than the maximum values defined in the SFR.

For any configurable threshold related to this requirement the guidance documentation needs to specify how the threshold can be configured. The allowed values must either be specified in the guidance documentation and must be lower or equal to the thresholds specified in this SFR or the TOE must not accept values beyond the thresholds specified in this SFR.

FCS_SSHC_EXT.1.9 The TSF shall ensure that the SSH client authenticates the identity of the SSH server using a local database associating each host name with its corresponding public key and [selection: *a list of trusted certification authorities, no other methods*] as described in RFC 4251 section 4.1.

Application Note:

The list of trusted certification authorities can only be selected if x509v3 -ssh-rsa, x509v3-ecdsa-sha2-nistp256, x509v3-ecdsa-sha2-nistp384, x509v3-ecdsa-sha2-nistp521 or x509v3-rsa2048-sha256 are selected in FCS_SSHC_EXT.1.5.

A.3.3.2. FCS_SSHS_EXT.1 Extended: SSH Server Protocol

(for O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components

Dependencies:

FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)

FCS_CKM.1/SKG Cryptographic Key Generation (Symmetric Keys)

FCS_CKM.2 Cryptographic Key Establishment

FCS_COP.1/DataEncryption Cryptographic operation (Data Encryption/decryption)

FCS_COP.1/SigGen Cryptographic operation (Signature Generation and Verification)

FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)

FCS_COP.1/KeyedHash Cryptographic operation (Keyed Hash Algorithm)

FCS_RBG_EXT.1 Random Bit Generation

FCS_SSHS_EXT.1.1 The TSF shall implement the SSH protocol in accordance with: RFCs 4251, 4252, 4253, 4254, [selection: 4256, 4344, 5647, 5656, 6187, 6668, 8268, 8308 section 3.1, 8332].

Application Note:

The mapping provided in the [Section A.3.3.1, “FCS_SSHC_EXT.1 SSH Client Protocol”](#) Application Note may be used as a guide here as well to ensure the appropriate RFC selections are made.

If the negotiated encryption algorithm is one of the [aes-gcm@openssh.com](#) algorithms, then the MAC field is ignored during negotiation and implicitly selects AES-GCM for the MAC. However once negotiated the connection is conformant with RFC 5647 and this should be selected when using [aes*-gcm@openssh.com](#) algorithms. [aes*-gcm@openssh.com](#) is specified in Section 1.6 of the OpenSSH Protocol Specification (<https://cvsweb.openbsd.org/cgi-bin/cvsweb/src/usr.bin/ssh/PROTOCOL?rev=1.31>).*

The ST author selects which of the additional RFCs to which conformance is being claimed. An SSH product can implement additional RFCs, but only those listed in the selection can be claimed as

conformant under common criteria. The RFC selections for this requirement need to be consistent with selections in later elements of this Package (e.g., cryptographic algorithms permitted). RFC 4253 indicates that certain cryptographic algorithms are “REQUIRED”. This means that the implementation must include support, not that the algorithms must be enabled for use. Ensuring that algorithms indicated as “REQUIRED” but not listed in the later elements of this component are implemented is out of scope of the evaluation activity for this requirement.

FCS_SSHS_EXT.1.2 The TSF shall ensure that the SSH protocol implementation supports the following user authentication methods as described in RFC 4252: public key-based, [selection: password-based, no other method].

Application Note:

The intent of this element is to specify user authentication mechanism(s) that the TOE acting as an SSH server accepts from connecting SSH clients. The TOE is required to implement the capability to validate presented authentication keys. When SSH Server is used as part of FTP_TRP.1/Admin, it is expected the TOE is capable of verifying each presented key against a database of trusted user identities as specified by FMT_SMF.1. While no specific public key algorithms are mandatory to support, the use of public key algorithms must be consistent with signature verification as specified in FCS_COP.1/SigGen.

If the TOE implements password-based authentication, the option ‘password-based’ must be selected. If the TOE can only authenticate itself with a public key, the option ‘no other method’ must be chosen.

FCS_SSHS_EXT.1.3 The TSF shall ensure that, as described in RFC 4253, packets greater than [assignment: number of bytes] bytes in an SSH transport connection are dropped.

Application Note:

RFC 4253 provides for the acceptance of ‘large packets’ with the caveat that the packets should be of ‘reasonable length’ or dropped. The assignment should be filled in by the ST author with the maximum packet size accepted, thus defining ‘reasonable length’ for the TOE.

FCS_SSHS_EXT.1.4 The TSF shall ensure that the SSH transport implementation uses the following encryption algorithms and rejects all other encryption algorithms: [selection: *aes128-cbc*, *aes256-cbc*, *aes128-ctr*, *aes256-ctr*, *AEAD_AES_128_GCM*, *AEAD_AES_256_GCM*, aes128-gcm@openssh.com, aes256-gcm@openssh.com].

Application Note:

RFC 5647 specifies the use of the AEAD_AES_128_GCM and AEAD_AES_256_GCM algorithms in SSH. As described in RFC 5647, AEAD_AES_128_GCM and AEAD_AES_256_GCM can only be chosen as encryption algorithms when the same algorithm is being used as the MAC algorithm. Corresponding FCS_COP entries are included in the ST for the algorithms selected here.

FCS_SSHS_EXT.1.5 The TSF shall ensure that the SSH public-key based authentication implementation uses [selection: *ssh-rsa*, *rsa-sha2-256*, *rsa-sha2-512*, *ecdsa-sha2-nistp256*, *x509v3-ssh-rsa*, *ecdsa-sha2-nistp384*, *ecdsa-sha2-nistp521*, *x509v3-ecdsa-sha2-nistp256*, *x509v3-ecdsa-sha2-nistp384*, *x509v3-ecdsa-sha2-nistp521*, *x509v3-rsa2048-sha256*] as its public key algorithm(s) and rejects all other public key algorithms.

Application Note:

The intent of this element is to specify public-key server authentication mechanism(s) that the TOE implements. The TOE is required to implement the capability to generate its own host authentication key(s) in accordance with FCS_CKM.1 as specified by FMT_SMF.1 via “Ability to manage the cryptographic keys”.

The TOE is required to implement the capability to verify the host’s public key as described in RFC 4251 Section 4.1.

If x509v3-ssh-rsa, x509v3-ecdsa-sha2-nistp256, x509v3-ecdsa-sha2-nistp384, x509v3-ecdsa-sha2-nistp521 or x509v3-rsa2048-sha256 are selected, then the FIA_X509_EXT SFRs in [Appendix A, Selection-Based Requirements](#) are applicable.

It is recommended to configure the TOE to reject presented RSA keys with a key length below 2048 bit. RFC 8332 specifies the use of rsa-sha2-256 or rsa-sha2-512 in SSH.

Public-key or certificate-based client authentication within the SSH protocol is based on the demonstrated possession of a private key matching a public key associated with a given authorized account on a system.

If x509v3-based authentication is claimed, the ST shall also include the appropriate FIA_X509_EXT SFRs.

An SSH server implementation that claims to support x509v3-based public key authentication algorithms is expected to comply with RFC 6187 Section 4 recommendations when identifying itself with an X.509v3 certificate to SSH clients.

FCS_SSHS_EXT.1.6 The TSF shall ensure that the SSH transport implementation uses [selection: hmac-sha1, hmac-sha1-96, hmac-sha2-256, hmac-sha2-512, AEAD_AES_128_GCM, AEAD_AES_256_GCM, implicit] as its MAC algorithm(s) and rejects all other MAC algorithm(s).

Application Note:

RFC 5647 specifies the use of the AEAD_AES_128_GCM and AEAD_AES_256_GCM algorithms in SSH. As described in RFC 5647, AEAD_AES_128_GCM and AEAD_AES_256_GCM can only be chosen as MAC algorithms when the same algorithm is being used as the encryption algorithm. RFC 6668 specifies the use of the sha2 algorithms in SSH.

The ST author selects “implicit” when, and only when, aes-gcm@openssh.com is selected as an encryption algorithm. When aes*-gcm@openssh.com is negotiated as the encryption algorithm, the MAC algorithm field is ignored and GCM is implicitly used as the MAC. “implicit” is not an SSH algorithm identifier and will not be seen on the wire; however, the negotiated MAC might be decoded as “implicit”.*

FCS_SSHS_EXT.1.7 The TSF shall ensure that [selection: diffie-hellman-group14-sha1, diffie-hellman-group15-sha512, ecdh-sha2-nistp256] and [selection: diffie-hellman-group14-sha256, diffie-hellman-group16-sha512, diffie-hellman-group17-sha512, diffie-hellman-group18-sha512, ecdh-sha2-nistp384, ecdh-sha2-nistp521, no other methods] are the only allowed key exchange methods used for the SSH protocol.

FCS_SSHS_EXT.1.8 The TSF shall ensure that within SSH connections, the same session keys are used for a threshold of no longer than one hour, and each encryption key is used to protect no more than one gigabyte of data. After any of the thresholds are reached, a rekey needs to be performed.

Application Note:

This SFR defines two thresholds - one for the maximum time span the same session keys can be used and the other one for the maximum amount of data that can be transmitted using the same session keys. Both thresholds need to be implemented and a rekey needs to be performed on whichever threshold is reached first. For the maximum transmitted data threshold, the encrypted traffic per encryption key needs to be counted. It is also acceptable to count the totally transmitted data per encryption key, the total encrypted traffic for incoming and outgoing data or the total transmitted incoming and outgoing data because the encrypted traffic per encryption key will always be lower or equal to the other options. The rekey requirement applies to all session keys (encryption, integrity protection) for incoming and outgoing traffic.

It is acceptable for a TOE to implement lower thresholds than the maximum values defined in the SFR.

For any configurable threshold related to this requirement the guidance documentation needs to specify how the threshold can be configured. The allowed values must either be specified in the guidance documentation and must be lower or equal to the thresholds specified in this SFR or the TOE must not accept values beyond the thresholds specified in this SFR.

A.3.4. FCS_HTTPS_EXT.1 Extended: HTTPS selected

(selected in FTP_ITC.1.1, FTP_TRP.1.1, for O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

[FCS_TLSC_EXT Extended: TLS Client Protocol, and/or
FCS_TLSS_EXT Extended: TLS Server Protocol]

FCS_HTTPS_EXT.1.1 The TSF shall implement the HTTPS protocol that complies with RFC 2818.

Application Note:

The ST author must provide enough detail to determine how the implementation is complying with the standard(s) identified; this can be done by additional detail in the TSS.

FCS_HTTPS_EXT.1.2 The TSF shall implement HTTPS using TLS as specified in FCS_TLSS_EXT.1 and/or FCS_TLSC_EXT.1.

FCS_HTTPS_EXT.1.3 If a peer certificate is presented, the TSF shall [selection: not require client authentication, not establish the connection, request authorization to establish the connection, [assignment: *other action*]] if the peer certificate is deemed invalid.

Application Note:

If HTTPS is selected in FTP_ITC.1, FTP_TRP.1/Admin and/or FTP_TRP.1/NonAdmin then validity is determined by the identifier verification, certification path, the expiration date, and the revocation status in accordance with RFC 5280. Certificate validity is tested in accordance with testing performed for FIA_X509_EXT.1.

A.3.5. FCS_COP.1/KeyedHash Cryptographic Operation (Keyed Hash Algorithm)

(selected with FCS_PCC_EXT.1 for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO, selected with FCS_IPSEC_EXT.1.4, FCS_SSHC_EXT.1.6, FCS_SSHS_EXT.1.6, FCS_TLSC_EXT, FCS_TLSS_EXT, FCS_DTLSC_EXT, FCS_DTLSS_EXT for O.COMMS_PROTECTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

FCS_RBG_EXT.1 Random Bit Generation,

FCS_COP.1/Hash,

FTP_ITC.1 or FCS_CKM.1/AKG,

FCS_CKM.6 Timing and event of cryptographic key destruction

FCS_COP.1.1/KeyedHash Refinement: The TSF shall perform [keyed-hash message authentication] in accordance with a specified cryptographic algorithm [selection: *HMAC-SHA-1*, *HMAC-SHA-256*, *HMAC-SHA-384*, *HMAC-SHA-512*, *implicit*] and cryptographic key sizes [assignment: *key size (in bits) used in HMAC*] and message digest sizes [selection: **160, 256, 384, 512**] bits that meet the following: [selection: *ISO/IEC 9797-2:2011, Section 7 “MAC Algorithm 2”, FIPS PUB 198-1*].

Application Note:

The key size [k] in the assignment falls into a range between L1 and L2 (defined in ISO/IEC 10118 for the appropriate hash function). For example, for SHA-256, L1=512, L2=256, where $L2 \leq k \leq L1$. Select 'implicit' in cases where keyed-hash message authentication is done implicitly (e.g. SSH using AES in GCM mode).

A.3.6. FIA_PSK_EXT.1 Extended: Pre-Shared Key Composition

(selected with FCS_IPSEC_EXT.1.13 for O.COMMS_PROTECTION)

Hierarchical to:

No other components.

Dependencies:

[if selected: FCS_COP.1/Hash Cryptographic Operation (Hash Algorithm)],

[if selected: FCS_RBG_EXT.1 Random Bit Generation]

Application Note:

The TOE must support pre-shared keys for use in the IPsec protocol. There are two types of pre-shared

keys—text-based (which are required) and bit-based (which are optional)—supported by the TOE, as specified in the requirements below. The first type is referred to as “text-based pre-shared keys”, which refer to pre-shared keys that are entered by users as a string of characters from a standard character set, similar to a password. Such pre-shared keys must be conditioned so that the string of characters is transformed into a string of bits, which is then used as the key.

The second type is referred to as “bit-based pre-shared keys” (for lack of a standard term); this refers to keys that are either generated by the TSF on a command from the administrator, or input in “direct form” by an administrator. “Direct form” means that the input is used directly as the key, with no “conditioning” as was the case for text-based pre-shared keys. An example would be a string of hex digits that represent the bits that comprise the key.

The requirements below mandate that the TOE must support text-based pre-shared keys and optionally support bit-based pre-shared keys, although generation of the bit-based pre-shared keys may be done either by the TOE or in the Operational Environment.

FIA_PSK_EXT.1.1 The TSF shall be able to use pre-shared keys for IPsec.

FIA_PSK_EXT.1.2 The TSF shall be able to accept text-based pre-shared keys that are:

- 22 characters in length and [selection: [assignment: other supported lengths], no other lengths];
- composed of any combination of upper and lower case letters, numbers, and special characters (that include: “!”, “@”, “#”, “\$”, “%”, “^”, “&”, “*”, “(”, and “”).

FIA_PSK_EXT.1.3 The TSF shall condition the text-based pre-shared keys by using [selection: SHA-1, SHA-256, SHA-384, SHA-512, [assignment: method of conditioning text string]] and be able to [selection: use no other pre-shared keys; accept bit-based pre-shared keys; generate bit-based pre-shared keys using the random bit generator specified in FCS_RBG_EXT.1].

Application Note:

For the length of the text-based pre-shared keys, a common length (22 characters) is required to help promote interoperability. If other lengths are supported they should be listed in the assignment; this assignment can also specify a range of values (e.g., “lengths from 5 to 55 characters”) as well.

In the second selection for FIA_PSK_EXT.1.3, the ST author fills in the method by which the text string entered by the administrator is “conditioned” into the bit string used as the key. This can be done by using one of the specified hash functions, or some other method through the assignment statement. If “bit-based pre-shared keys” is selected, the ST author specifies whether the TSF merely accepts bit-based pre-shared keys, or is capable of generating them. If it generates them, the requirement specified that they must be generated using the RBG specified by the requirements. If the use of bit-based pre-shared keys is not supported, the ST author chooses “use no other pre-shared keys”.

A.3.7. FCS_DTLSC_EXT & FCS_DTLSS_EXT DTLS Protocol

Datagram TLS (DTLS) is not a required component of this cPP. If a TOE implements DTLS, a corresponding selection in FTP_ITC.1, FTP_TRP.1/Admin, and/or FTP_TRP.1/NonAdmin should be made to define what the DTLS protocol is implemented to protect. If a corresponding option to support DTLS has been selected in at least one of the SFRs named above, the corresponding

selection-based DTLS-related SFRs should be added to the ST from the Functional Package for TLS.

The decision whether to include the support for protocol-level mutual authentication in the scope of the evaluation is regarded as part of the TOE boundary definition. These SFRs can be included in a conforming ST at the discretion of the ST author, even if the conformance statement of the cPP requires exact conformance. It is not mandatory to implement mutually authenticated DTLS in order to conform to this cPP. Similarly, this cPP does not mandate or prohibit any other selections that are defined in the Functional Package for TLS.

A TOE may act as the client, the server, or both in DTLS sessions. The requirement has been separated into DTLS Client (FCS_DTLSC_EXT) and DTLS Server (FCS_DTLSS_EXT) requirements to allow for these differences.

To ensure audit requirements are properly met, a DTLS receiver may need to monitor the DTLS connection state at the application layer. When no data is received from a DTLS connection for a long time (where the application decides what 'long' means), the receiver should send a close_notify alert message and close the connection.

If the TOE acts as the server during the claimed DTLS sessions, the ST author should claim the corresponding FCS_DTLSS_EXT requirements. In this case the TOE needs to claim at least the FCS_DTLSS_EXT.1. If the TOE acts as DTLS server and in addition also supports mutual authentication, the FCS_DTLSS_EXT.2 need to be claimed in addition. If the TOE acts as both a client and server during the claimed DTLS sessions, the ST author should claim the corresponding FCS_DTLSC_EXT and FCS_DTLSS_EXT requirements.

A.4. Passphrase-based Key Entry

The SFRs in this section are to be incorporated in the ST to support the optional Passphrase-based Key Entry function.

A.4.1. FCS_PCC_EXT.1 Extended: Cryptographic Password Construct and Conditioning

(for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components

Dependencies:

FCS_COP.1/KeyedHash Cryptographic Operation (Keyed Hash Algorithm)

FCS_PCC_EXT.1.1 A password used by the TSF to generate a password authorization factor shall enable up to [assignment: *positive integer of 64 or more*] characters in the set of {upper case characters, lower case characters, numbers, and [assignment: *other supported special characters*]} and shall perform Password-based Key Derivation Functions in accordance with a specified cryptographic algorithm [HMAC-[selection: *SHA-256, SHA-384, SHA-512*]], with [assignment: *positive integer of 1000 or more*] iterations, and output cryptographic key sizes [selection: *128, 256, 384, 512*] bits that meet the following: [NIST SP 800-132].

Application Note:

This SFR is conditionally required if the manual entry of a drive encryption passphrase is supported by the TOE.

A.4.2. FCS_CKM.5 Cryptographic Key Derivation

(selected in FCS_KYC_EXT.1.1 for O.STORAGE_ENCRYPTION, O.STRONG_CRYPT0)

Hierarchical to:

No other components

Dependencies:

~~[FCS_CKM.2 Cryptographic key distribution, or~~

[if selected: FCS_COP.1/KeyedHash Cryptographic Operation (Keyed Hash Algorithm)],

[if selected: FCS_COP.1/CMAC Cryptographic Operation (for cipher-based message authentication)],

FCS_CKM.6 Timing and event of cryptographic key destruction

[if selected: FCS_RBG_EXT.1 Random Bit Generation]

FCS_CKM.5.1 The TSF shall derive cryptographic keys [**intermediate key**] from [selection: *a RNG generated submask as specified in FCS_RBG_EXT.1, a conditioned password submask, imported submask*] in accordance with a specified key derivation algorithm [selection: *the keyed-hash functions specified in FCS_COP.1/KeyedHash, the cipher-based function specified in FCS_COP.1/CMAC*] and specified cryptographic key sizes [**at least of equivalent security strength (in number of bits) to the BEV or the DEK**] that meet the following: [selection: *NIST SP 800-108 [selection: KDF in Counter Mode, KDF in Feedback Mode, KDF in Double-Pipeline Iteration Mode], NIST SP 800-132, ISO/IEC 11770-6:2016 [selection: KPF2, KPF3, KPF4]*].

A.4.3. FCS_COP.1/CMAC Cryptographic Operation (for cipher-based message authentication)

(selected with FPT_SBT_EXT.1.2 for O.STORAGE_ENCRYPTION, O.STRONG_CRYPT0)

Hierarchical to:

No other components.

Dependencies:

~~[FDP_ITC.1 Import of user data without security attributes, or~~

~~FDP_ITC.2 Import of user data with security attributes, or~~

~~FCS_CKM.1/SKG Cryptographic Key Generation (Symmetric Keys), or~~

~~FCS_CKM.5 Cryptographic key derivation]~~

FCS_CKM.6 Timing and event of cryptographic key destruction

FCS_COP.1.1/CMAC Refinement: The TSF shall perform [**cryptographic message authentication**] in accordance with a specified cryptographic algorithm [selection: *CMAC-AES-128, CMAC-AES-192, CMAC-AES-256, CMAC-SEED-128, CMAC-HIGHT-128, CMAC-LEA-128, CMAC-LEA-192, CMAC-LEA-256*] and cryptographic key sizes [assignment: *key size (in bits)*] **used in** [selection: *AES, SEED, HIGHT,*

LEA] that meet the following: [selection:

- NIST SP 800-38B,
- ISO/IEC 9797-1:2011, Section 7.6 “MAC Algorithm 5”; [selection:
 - ISO/IEC 18033-3:2010, Section 5.4 “SEED”,
 - ISO/IEC 18033-3:2010, Section 4.5 “HIGHT”,
 - ISO/IEC 29192-2:2019, Section 6.3 “LEA”]

]

Application Note:

For the assignment, the key size will fall into a range between 128 and 256.

When CMAC is used in FPT_SBT_EXT.1, the dependency on FCS_CKM.1/SKG, FCS_CKM.6 can be removed for the symmetric key used for message authentication. This is because in other standards () that specify security requirements for cryptographic modules, public verification key or keyed message authentication key is allowed to be placed in the module code and is not CSP. Such a key can be considered as not needing to rely on the requirements for key generation and key destruction.*

() ISO/IEC 19790 "Security requirements for cryptographic modules" 7.5 Software Firmware Security*

A.4.4. FCS_SNI_EXT.1 Extended: Cryptographic Operation (Salt and Nonce Generation)

(selected with FCS_PCC_EXT.1, FCS_CKM.5.1, for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components

Dependencies:

FCS_RBG_EXT.1 Random Bit Generation

FCS_SNI_EXT.1.1 The TSF shall only use salts that are generated by a RNG as specified in FCS_RBG_EXT.1.

FCS_SNI_EXT.1.2 The TSF shall only use unique nonces with a minimum size of [64] bits.

Application Note:

This SFR is conditionally required if the manual entry of a drive encryption passphrase is supported by the TOE.

A.5. Identification and Authentication (FIA)

A.5.1. Authentication using X.509 certificates

X.509 certificate-based authentication is required if IPsec or TLS communications are claimed for

FTP_ITC.1 or FTP_TRP. If SSH client communications are claimed and any x509 algorithms are claimed in FCS_SSHC_EXT.1.5 or FCS_SSHS_EXT.1.5, these SFRs are required. In the case of the TOE only acting as the SSH server or acting as the client, but not claiming any x509 algorithms in FCS_SSHC_EXT.1.5 or FCS_SSHS_EXT.1.5, these SFRs are optional.

Although the functionality in FIA_X509_EXT.1/Rev and FIA_X509_EXT.2 is always required when using X.509 certificate-based authentication, the TOE only needs to be able to generate a Certification Request if the TOE needs to present an X.509 certificate to another endpoint via the TSF for authentication (i.e. if at least one of the following SFRs is included in the ST: FCS_DTLSC_EXT.2, FCS_DTLSS_EXT.1, FCS_DTLSS_EXT.2, FCS_IPSEC_EXT.1, FCS_SSHC_EXT.1.5 (applicable only if at least one of the x509v3-* ciphers is selected), FCS_SSHS_EXT.1.5 (applicable only if at least one of the x509v3-* ciphers is selected), FCS_TLSC_EXT.2, FCS_TLSS_EXT.1, FCS_TLSS_EXT.2). Therefore FIA_X509_EXT.3 only needs to be added to the ST in this case. If the TOE does not need to present an X.509 certificate to another endpoint via the TSF for authentication (e.g. a client not supporting mutual authentication) the use of FIA_X509_EXT.3 is optional.

A.5.1.1. FIA_X509_EXT.1 X.509 Certificate Validation

(for O.COMMS_PROTECTION)

Hierarchical to:

No other components

Dependencies:

FIA_X509_EXT.2 X.509 Certificate Authentication

FIA_X509_EXT.1.1 Refinement The TSF shall validate certificates in accordance with the following rules:

- RFC 5280 certificate validation and certification path validation **supporting a minimum path length of three certificates**.
- The certification path must terminate with a trusted CA certificate designated as a trust anchor.
- The TSF shall validate a certification path by ensuring that all CA certificates in the certification path contain the basicConstraints extension with the CA flag set to TRUE.
- The TSF shall validate the revocation status of the certificate using [selection: *the Online Certificate Status Protocol (OCSP) as specified in RFC 6960, a Certificate Revocation List (CRL) as specified in RFC 5280 Section 6.3, Certificate Revocation List (CRL) as specified in RFC 5759 Section 5*].
- The TSF shall validate the extendedKeyUsage field according to the following rules:

- *Certificates used for trusted updates and executable code integrity verification shall have the Code Signing purpose (id-kp 3 with OID 1.3.6.1.5.5.7.3.3) in the extendedKeyUsage field.*
- *Server certificates presented for TLS shall have the Server Authentication purpose (id-kp 1 with OID 1.3.6.1.5.5.7.3.1) in the extendedKeyUsage field.*
- *Client certificates presented for TLS shall have the Client Authentication purpose (id-kp 2 with OID 1.3.6.1.5.5.7.3.2) in the extendedKeyUsage field.*

- *OCSP certificates presented for OCSP responses shall have the OCSP Signing purpose (id-kp 9 with OID 1.3.6.1.5.5.7.3.9) in the extendedKeyUsage field.*

FIA_X509_EXT.1.2 The TSF shall only treat a certificate as a CA certificate if the basicConstraints extension is present and the CA flag is set to TRUE.

Application Note:

FIA_X509_EXT.1.1 lists the rules for validating certificates. The ST author selects whether revocation status is verified using OCSP or CRLs. The trusted channel/path protocols may require that certificates are used; this use may require that specific certificate extensions must be present and checked. If the TOE supports functionality that does not use any of the possible values listed in the specific certificate extension, then it is reasonable to process such certificate as the relevant part of the SFR is considered trivially satisfied. However, this does not mean that it is allowable to accept certificates with inappropriate extension values simply because a specific security function is not implemented by the TOE. For example, the TOE should not successfully authenticate a web server that presents an X.509v3 certificate that has extendedKeyUsage set to only OCSPSigning, even if the TOE does not implement OCSP revocation checking. The TOE shall be capable of supporting a minimum path length of three certificates. That is, the TOE shall support a hierarchy comprising of at least a self-signed root CA certificate, a subordinate CA certificate, and a leaf certificate. The chain validation is expected to terminate with a trust anchor. This means the validation can terminate with any trusted CA certificate designated as a trust anchor. This CA certificate must be loaded into the trust store ('certificate store', 'trusted CA Key Store' or similar) managed by the TOE trust store. If the TOE's trust store supports loading of multiple hierarchical CA certificates or certificate chains, the TOE must clearly indicate all certificates that it considers trust anchors.

The validation of X.509v3 leaf certificates comprises several steps:

a) A Certificate Revocation Check refers to the process of determining the current revocation status of an otherwise structurally valid certificate. This must be performed every time a certificate is used for authentication. This check must be performed for each certificate in the chain up to, but not including, the trust anchor. This means that CA certificates that are not trust anchors, and leaf certificates in the chain, must be checked. It is not required to check the revocation status of any CA certificate designated a trust anchor, however if such check is performed it must be handled consistently with how other certificates are checked.

b) An expiration check must be performed. This check must be conducted for each certificate in the chain, up to and including the trust anchor.

c) The continuity of the chain must be checked, showing that the signature on each certificate that is presented to the TOE is valid and the chain terminates at the trust anchor.

d) The presence of relevant extensions in each certificate in the chain such as the

extendedKeyUsage parameters of the leaf certificate must correspond to SFR-relevant functionality. For example, a peer acting as a web server should have TLS Web Server Authentication listed as an extendedKeyUsage parameter of its X.509v3 certificate. It shall be checked that the relevant extensions in each certificate in the chain such as the extendedKeyUsage parameters of the leaf certificate correspond to the SFR-relevant functionality they are used with.

It is expected that revocation checking is performed when a certificate is used in an authentication step. It is expected that revocation checking is performed on both leaf and intermediate CA certificates when a leaf certificate is presented to the TOE as part of the certificate chain during authentication. Revocation checking of any CA certificate designated a trust anchor is not required.

If the TOE implements mutual authentication or acts as a server, there is no expectation of performing any checks on TOE's own leaf certificate during authentication.

FIA_X509_EXT.1.2 applies to certificates that are used and processed by the TSF and restricts the certificates that may be added as trusted CA certificates.

The ST author must include FIA_X509_EXT.1 in all instances except when only SSH is selected within FTP_ITC.1, and implementation is limited to public-key authentication that does not rely on X.509 certificates. Additionally, FIA_X509_EXT.1 must also be included if "X.509 Certificate" is selected in FPT_TUD_EXT.1.3.

A.5.1.2. FIA_X509_EXT.2 X.509 Certificate Authentication

Hierarchical to:

No other components

Dependencies:

FIA_X509_EXT.1 X.509 Certificate Validation

FIA_X509_EXT.2.1 The TSF shall use X.509v3 certificates as defined by RFC 5280 to support authentication for [selection: *DTLS, HTTPS, IPsec, TLS, SSH, [assignment: other protocols], no protocols*] and [selection: *code signing for system firmware/software updates [assignment: other uses], no additional uses*].

FIA_X509_EXT.2.2 When the TSF cannot establish a connection to determine the validity of a certificate, the TSF shall [selection: *allow the Administrator to choose whether to accept the certificate in these cases, accept the certificate, not accept the certificate*].

Application Note:

In FIA_X509_EXT.2.1, the ST author's selection includes IPsec, TLS, or HTTPS if these protocols are included in FTP_ITC.1.1. SSH should be included if authentication other than ssh-rsa, ecdsa-sha2-nistp256, ecdsa-sha2-nistp384, and/or ecdsa-sha2-nistp521 is selected in FCS_SSHC_EXT.1.5 or FCS_SSHS_EXT.1.5. The ST author selects "code signing for system firmware/software updates" when "X.509 certificate" is selected in FPT_TUD_EXT.1.3.

Often a connection must be established to check the revocation status of a certificate - either to download a CRL or to perform a lookup using OCSP. In FIA_X509_EXT.2.2 the selection is used to describe the behaviour in the event that such a connection cannot be established (for example, due to a network error). If the TOE has determined the certificate is valid according to all other rules in FIA_X509_EXT.1, the behaviour indicated in the selection determines the validity. The TOE must not accept the certificate if it fails any of the other validation rules in FIA_X509_EXT.1. If the Administrator-configured option is selected by the ST Author, the ST Author also selects the corresponding function in FMT_SMF.1. The selection should be consistent with the validation requirements in FCS_IPSEC_EXT.1.14, FCS_TLSC_EXT.1.3 and FCS_TLSC_EXT.2.3.

The ST author must include FIA_X509_EXT.2 in all instances except when only SSH is selected within FTP_ITC.1 and ssh-rsa, ecdsa-sha2-nistp256, ecdsa-sha2-nistp384, and/or ecdsa-sha2-nistp521 authentication is also selected. Additionally, FIA_X509_EXT.2 must also be included if "X.509 certificate" is selected in FPT_TUD_EXT.1.3.

A.5.1.3. FIA_X509_EXT.3 X.509 Certificate Requests

Hierarchical to:

No other components

Dependencies:

FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)

FIA_X509_EXT.1 X.509 Certificate Validation

Although the functionality in FIA_X509_EXT.1 and FIA_X509_EXT.2 is always required when using X.509 certificate-based authentication, the TOE only needs to be able to generate a Certification Request if the TOE needs to present an X.509 certificate to another endpoint via the TSF for authentication (i.e. if at least one of the following SFRs is included in the ST: FCS_DTLSC_EXT.2, FCS_DTLSS_EXT.1, FCS_DTLSS_EXT.2, FCS_IPSEC_EXT.1, FCS_SSHC_EXT.1.5 (applicable only if at least one of the x509v3-* ciphers is selected), FCS_SSHS_EXT.1.5 (applicable only if at least one of the x509v3-* ciphers is selected), FCS_TLSC_EXT.2, FCS_TLSS_EXT.1, FCS_TLSS_EXT.2). Therefore FIA_X509_EXT.3 only needs to be added to the ST in this case. If the TOE does not need to present an X.509 certificate to another endpoint via the TSF for authentication (e.g. a client not supporting mutual authentication) the use of FIA_X509_EXT.3 is optional. This element must be included in the ST if X.509 certificates are used as part of FTP_ITC.1, FTP_TRP.1/Admin, and/or FTP_TRP.1/NonAdmin where the TOE authenticating itself to external IT entities, administrators, or distributed components.

FIA_X509_EXT.3.1 The TSF shall generate a Certificate Request as specified by RFC 2986 and be able to provide the following information in the request: public key and [selection: *device-specific information, Common Name, Organization, Organizational Unit, Country, [assignment: other information]*].

Application Note:

The public key is the public key portion of the public-private key pair generated by the TOE as specified in FCS_CKM.1/AKG.

FIA_X509_EXT.3.2 The TSF shall validate the chain of certificates from the Root CA upon receiving the CA Certificate Response.

Appendix B: Conditionally Mandatory Requirements

The following are security functional requirements that are mandatory if the TOE configuration meets the condition(s) specified in [Section 1.4.2, “USE CASE 2: Conditionally Mandatory Use Cases”](#).

B.1. Confidential Data on Nonvolatile Storage Devices

B.1.1. FPT_KYP_EXT.1 Extended: Protection of Key and Key Material

(for O.KEY_MATERIAL, for O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

FCS_KYC_EXT.1 Extended: Key Chaining,

[if selected: FCS_COP.1/KeyWrap Cryptographic operation (Key Wrapping)],

[if selected: FCS_COP.1/KeyEnc Cryptographic operation (Key Encryption) and/or FCS_COP.1/KeyTransport Cryptographic operation (Key Transport)],

[if selected: FCS_SMC_EXT.1 Extended: Submask Combining]

FPT_KYP_EXT.1.1 The TSF shall [selection:

- *not store keys in nonvolatile memory,*
- *only store keys in nonvolatile memory when wrapped, as specified in FCS_COP.1/KeyWrap, or encrypted, as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport*
- *only store plaintext keys that meet any one of the following criteria [selection:*
 - *the key will no longer provide access to the encrypted data after initial provisioning,*
 - *the key is a key split that is combined as specified in FCS_SMC_EXT.1, and the other half of the key split is [selection:*
 - *wrapped as specified in FCS_COP.1/KeyWrap,*
 - *encrypted as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport,*
 - *derived and not stored in nonvolatile memory],*
 - *the key is [selection: used to wrap a key as specified in FCS_COP.1/KeyWrap, used to encrypt a key as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport] that is already [selection: wrapped as specified in FCS_COP.1/KeyWrap, encrypted as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport],*
 - *the nonvolatile memory where the key is stored on is located in a protected storage device]*

].

Application Note:

The keys must be protected from unauthorized access and must not be stored on any nonvolatile storage device without protection. If the keys exist within protected memory that is not user accessible on the TOE or OE, the key can be used to protect the BEV or the DEK only if the key is:

- 1. a key split or a key provides additional layers of wrapping or encryption on keys that have already been protected or*
- 2. the nonvolatile memory the key is stored on is located in a protected storage device and the key is protected from unauthorized access.*

The selection “the nonvolatile memory the key is stored on is located in a protected storage device” should be applied to the start (or root) of a key chain, not for intermediate keys of the key chain.

The protected storage device can protect stored data from unauthorized access and the nonvolatile memory in it is not accessible from outside of the TOE. Examples of protected storage devices include Secure Elements (SE), Trusted Platform Modules (TPM), Hardware Security Modules (HSM), Trusted Execution Environments (TEE), Secure Enclave Processors (SEP), and so on.

In the case where an encrypted key is stored on media that is decrypted by a key stored in a protected storage device, the selection for "only store keys in nonvolatile memory when wrapped, as specified in FCS_COP.1/KeyWrap, or encrypted, as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport" should be used. In this case, the key that the protected storage device generates and stores internally is considered to be the starting point of the key chain, so "the nonvolatile memory where the key is stored on is located in a protected storage device" must also be selected as a means of protecting that key.

Testing of cryptographic functions implemented in the protected storage device may not be feasible and independent testing may not be available. In this situation, contact the CC Scheme.

B.1.2. FCS_KYC_EXT.1 Extended: Key Chaining

(for O.STORAGE_ENCRYPTION, O.STRONG_CRYPTO)

Hierarchical to:

No other components.

Dependencies:

[FCS_COP.1/KeyWrap Cryptographic operation (Key Wrapping),
FCS_SMC_EXT.1 Extended: Submask Combining,
FCS_CKM.6 Timing and event of cryptographic key destruction,
FCS_COP.1/KeyEnc Cryptographic operation (Key Encryption),
FCS_CKM.5 Cryptographic key derivation,
and/or
FCS_COP.1/KeyTransport Cryptographic operation (Key Transport)]

Application Note:

This SFR forms a keychain that terminates either with a DEK or a BEV to unlock a self-encrypting drive. If passwords are not used, it can be a keychain of one, with no intermediate keys forming the DEK or BEV, provided that key is protected. For example, if the DEK for an SED is not stored on the

SED and is released on power-up, a keychain of one is allowed.

FCS_KYC_EXT.1.1 The TSF shall maintain a key chain of: [selection: one, using a submask as the BEV or DEK; intermediate keys originating from one or more submask(s) to the BEV or DEK using the following method(s): [selection: key wrapping as specified in FCS_COP.1/KeyWrap, key combining as specified in FCS_SMC_EXT.1, key encryption as specified in FCS_COP.1/KeyEnc, key derivation as specified in FCS_CKM.5, key transport as specified in FCS_COP.1/KeyTransport]] while maintaining an effective strength of [selection: 128 bits, 256 bits].

Application Note:

Key Chaining is the method of using multiple layers of encryption keys to ultimately secure the BEV (Border Encryption Value). The number of intermediate keys will vary – from one (e.g., taking the conditioned password authorization factor and directly using it as the BEV) to many. This applies to all keys that contribute to the ultimate wrapping or derivation of the BEV; including those in areas of protected storage (e.g. TPM stored keys, comparison values).

Multiple key chains to the BEV are allowed, as long as all chains meet the key chain requirement.

Once the ST Author has selected a method to create the chain (either by unwrapping or encrypting keys), they pull the appropriate requirement out of this appendix. It is allowable for an implementation to use for any or all methods.

The method the TOE uses to chain keys and manage/protect them is described in the Key Management Description; see [Appendix F, Key Management Document](#) for more information.

B.1.3. FDP_DSK_EXT.1 Extended: Protection of Data on Storage Devices

(for O.STORAGE_ENCRYPTION)

Hierarchical to:

No other components.

Dependencies:

FCS_COP.1/StorageEncryption Cryptographic operation (Data Encryption/Decryption).

FDP_DSK_EXT.1.1 The TSF shall [selection: perform encryption in accordance with FCS_COP.1/StorageEncryption, use a self-encrypting Nonvolatile Storage Device that is separately CC certified to conform to the FDE EE cPP], such that any Nonvolatile Storage Device contains no plaintext User Document Data and no plaintext Confidential TSF Data.

Application Note:

If the self-encrypting device option is selected, the device must be certified in conformance to the current Full Disk Encryption Protection Profile. The ST Author should consult with a CC Scheme for advice on approved Protection Profiles.

FDP_DSK_EXT.1.2 The TSF shall encrypt all protected data without user intervention.

Application Note:

The intent of this requirement is to specify that encryption of any confidential data will not depend on a user electing to protect that data. The encryption specified in FDP_DSK_EXT.1 occurs transparently to the user and the decision to protect the data is outside the discretion of the user. If additional data other than D.USER.DOC and D.TSF.CONF are encrypted, it will be wiped/purged by the cryptographic erase process.

If a vendor makes the selection "use a self-encrypting Nonvolatile Storage Device that is separately CC certified to conform to the FDE EE cPP" in FDP_DSK_EXT.1.1, testing is not required as SED testing is performed within the FDE EE cPP already.

The TSS, KMD, and test sections only apply to parts of the TOE which fall under the selection "perform encryption in accordance with FCS_COP.1/StorageEncryption".

B.2. PSTN Fax-Network Separation

B.2.1. FDP_FXS_EXT.1 Extended: Fax separation

(for O.FAX_NET_SEPARATION)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FDP_FXS_EXT.1.1 The TSF shall prohibit communication via the fax interface, except transmitting or receiving User Data using fax protocols.

Application Note:

FDP_FXS_EXT.1 is required if fax-net separation is performed by the TSF.

B.3. Network Communications

B.3.1. FTP_TRP.1/NonAdmin Trusted path (for Non-administrators)

(for O.COMMS_PROTECTION)

Hierarchical to:

No other components.

Dependencies:

[FCS_IPSEC_EXT.1 Extended: IPsec selected, or

FCS_TLSC_EXT Extended: TLS Client Protocol and/or FCS_TLSS_EXT Extended: TLS Server Protocol, or

FCS_SSHC_EXT Extended: SSH Client Protocol or FCS_SSHS_EXT Extended: SSH Server Protocol, or

FCS_DTLSC_EXT Extended: DTLS Client Protocol and/or FCS_DTLSS_EXT Extended: DTLS Server

Protocol, or
FCS_HTTPS_EXT.1 Extended: HTTPS selected].

FTP_TRP.1.1/NonAdmin Refinement: The TSF shall **use** [selection, choose at least one of: *IPsec, SSH, TLS, DTLS, TLS/HTTPS*] **to** provide a **trusted** communication path between itself and [remote] users that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from [disclosure **and detection of modification of the communicated data**].

FTP_TRP.1.2/NonAdmin Refinement: The TSF shall permit [selection: *the TSF, ~~local users~~, remote users*] to initiate communication via the trusted path

FTP_TRP.1.3/NonAdmin Refinement: The TSF shall require the use of the trusted path for [initial user authentication **[and all remote user actions]**].

Application Note:

This requirement ensures that authorized remote users initiate all communication with the TOE via a trusted path, and that all communications with the TOE by remote users is performed over this path. The data passed in this trusted communication path are encrypted as defined the protocol chosen in the first selection. The ST author chooses the mechanism or mechanisms supported by the TOE, and then ensures the detailed requirements in [Section A.3, “Protected Communications”](#) corresponding to their selection are copied to the ST if not already present.

B.4. Authentication

B.4.1. FIA_AFL.1 Authentication failure handling

(for O.USER_I&A, O.AUTH_FAILURES)

Hierarchical to:

No other components.

Dependencies:

FIA_UAU.1 Timing of authentication

FIA_AFL.1.1 The TSF shall detect when [selection: *[assignment: positive integer number], an administrator configurable positive integer within [assignment: range of acceptable values]*] unsuccessful authentication attempts occur related to [assignment: *list of authentication events*].

FIA_AFL.1.2 When the defined number of unsuccessful authentication attempts has been [selection: *met, surpassed*], the TSF shall [assignment: *list of actions*].

Application Note:

This SFR applies only to internal identification and authentication.

Appendix C: Optional Requirements

ST authors are free to choose none, some or all SFRs defined in this chapter. Just the fact that a product supports a certain functionality does not mandate to add any SFR defined in this chapter.

C.1. Image Overwrite

The SFRs in this section are to be incorporated in the ST to support the optional Image Overwrite function.

C.1.1. FDP_UDU_EXT.1 Document Unavailability

(for O.IMAGE_OVERWRITE)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FDP_UDU_EXT.1.1 The TSF shall ensure that any previous information content stored on a [selection: **wear-leveled storage device, non-wear-leveled storage device**] of a resource is made unavailable [selection: **by overwriting data, by destroying its cryptographic key**] upon the **deallocation of the resource from** the following objects: **D.USER.DOC**.

Application Note:

The timing of overwriting or cryptographic key destruction is when completion or cancellation of a Document Processing job, periodically, or when requested by an authorized administrator. In the TSS the ST author will describe which timing is used.

C.2. Wipe Data

The SFRs in this section are to be incorporated in the ST to support the optional Wipe Data function.

C.2.1. FPT_WIPE_EXT.1 Data Wiping

(for O.WIPE_DATA)

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FPT_WIPE_EXT.1.1 The TSF shall ensure that any previous customer-supplied information content of a resource in nonvolatile storage is made unavailable upon the request of an Administrator to

the following objects: [D.USER, D.TSF] using the following method(s): cryptographic erase and [selection:

- *logically addresses the storage location of the data and performs a [selection: single, [assignment: ST author defined multi-pass]] overwrite consisting of [selection: zeroes, ones, pseudo-random pattern, any value that does not contain any CSPs],*
- *block erase,*
- *media specific eMMC method,*
- *media specific ATA erase method,*
- *media specific NVMe method,*
- *no other method*

] that meets the following: [no standard].

Application Note:

In this context, “cryptographic erase” encompasses any method that destroys the decryption key or the key that protects the decryption key while leaving encrypted D.USER and/or D.TSF on the storage media. This would include, for example, some ATA commands that only destroy the key. Note that key destruction is a mandatory requirement covered by FCS_CKM.6. Cryptographic erase also uses the method described in FCS_CKM.6 for key destruction.

Cryptographic erase covers D.USER.DOC and D.TSF.CONF (as per requirement of FDP_DSK_EXT.1). Encryption of additional data types is optional; therefore, cryptographic erase may not apply to additional data types.

If the “overwrite” method is applied to any wear-leveling storage media, the ST author must assume that some encrypted D.USER and/or D.TSF remains on that storage media and document this condition in the TSS.

If a single magnetic drive is partitioned, and one or more of the partitions do not contain D.USER or D.TSF, the ST author should clarify whether the partitions not containing the data are included in the wipe function.

Wear-leveling storage media is characterized by differentiating between logical and internal physical addressing to enable longevity enhancements via erasures and re-writes being distributed across the physical media. The developer shall provide a debug log or special tooling to perform the evaluator’s test.

C.3. Cryptographic Support (FCS)

C.3.1. FCS_DTLSC_EXT & FCS_DTLSS_EXT DTLS Protocol

Datagram TLS (DTLS) is not a required component of this cPP. If a TOE implements DTLS, a corresponding selection in FTP_ITC.1, FTP_TRP.1/Admin, and/or FTP_TRP.1/NonAdmin should be made to define what the DTLS protocol is implemented to protect. If a corresponding option to support DTLS has been selected in at least one of the SFRs named above, the corresponding

selection-based DTLS-related SFRs should be added to the ST from the Functional Package for TLS.

The decision whether to include the support for protocol-level mutual authentication in the scope of the evaluation is regarded as part of the TOE boundary definition. These SFRs can be included in a conforming ST at the discretion of the ST author, even if the conformance statement of the cPP requires exact conformance. It is not mandatory to implement mutually authenticated DTLS in order to conform to this cPP. Similarly, this cPP does not mandate or prohibit any other selections that are defined in the Functional Package for TLS.

A TOE may act as the client, the server, or both in DTLS sessions. The requirement has been separated into DTLS Client (FCS_DTLSC_EXT) and DTLS Server (FCS_DTLSS_EXT) requirements to allow for these differences.

To ensure audit requirements are properly met, a DTLS receiver may need to monitor the DTLS connection state at the application layer. When no data is received from a DTLS connection for a long time (where the application decides what 'long' means), the receiver should send a close_notify alert message and close the connection.

If the TOE acts as the server during the claimed DTLS sessions, the ST author should claim the corresponding FCS_DTLSS_EXT requirements. In this case the TOE needs to claim at least the FCS_DTLSS_EXT.1. If the TOE acts as DTLS server and in addition also supports mutual authentication, the FCS_DTLSS_EXT.2 need to be claimed in addition. If the TOE acts as both a client and server during the claimed DTLS sessions, the ST author should claim the corresponding FCS_DTLSC_EXT and FCS_DTLSS_EXT requirements.

C.3.2. FCS_TLSC_EXT & FCS_TLSS_EXT TLS Protocol

TLS is not a required component of this cPP. If a TOE implements TLS, a corresponding selection in FTP_ITC.1, FTP_TRP.1/Admin, and/or FTP_TRP.1/NonAdmin should be made to define what the TLS protocol is implemented to protect. If a corresponding option to support TLS has been selected in at least one of the SFRs named above, the corresponding selection-based TLS related SFRs should be added to the ST from the Functional Package for TLS.

The decision whether to include the support for protocol-level mutual authentication in the scope of the evaluation is regarded as part of the TOE boundary definition. These SFRs can be included in a conforming ST at the discretion of the ST author, even if the conformance statement of the cPP requires exact conformance. It is not mandatory to implement mutually authenticated TLS in order to conform to this cPP. Similarly, this cPP does not mandate or prohibit any other selections that are defined in the Functional Package for TLS.

A TOE may act as the client, the server, or both in TLS sessions. The requirement has been separated into TLS Client (FCS_TLSC_EXT) and TLS Server (FCS_TLSS_EXT) requirements to allow for these differences.

Appendix D: Extended Component Definitions

This appendix contains the definitions for the extended requirements that are used in the cPP, including those used in [\[Consistency Rationale\]](#) and [Appendix A, Selection-Based Requirements](#) .

Note that several of the extended requirements used for this cPP have dependencies on SFRs that are iterated in the cPP (e.g. FCS_COP.1/DataEncryption). The reader is advised that the SFR names for these dependencies may differ if the same extended components are used in other Protection Profiles.

D.1. Cryptographic Support (FCS)

D.1.1. FCS_HTTPS_EXT Extended: HTTPS selected

Family Behaviour

Components in this family define requirements for protecting remote management sessions between the TOE and a Security Administrator. This family describes how HTTPS will be implemented. This is a new family defined for the FCS Class.

Component Levelling

Example 1. Component Levelling

```
+-----+
|                                     | +---+
| FCS_HTTPS_EXT HTTPS selected      | +--->| 1 |
|                                     | +---+
+-----+
```

FCS_HTTPS_EXT.1 HTTPS selected, requires that HTTPS be implemented according to RFC 2818 and supports TLS.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- Failure of HTTPS session establishment

D.1.1.1.1. FCS_HTTPS_EXT.1 Extended: HTTPS selected

Hierarchical to:

No other components.

Dependencies:

[FCS_TLSC_EXT Extended: TLS Client Protocol, and/or
FCS_TLSS_EXT Extended: TLS Server Protocol]

FCS_HTTPS_EXT.1.1 The TSF shall implement the HTTPS protocol that complies with RFC 2818.

FCS_HTTPS_EXT.1.2 The TSF shall implement HTTPS using TLS as specified in FCS_TLSC_EXT.1 and/or FCS_TLSS_EXT.1.

FCS_HTTPS_EXT.1.3 If a peer certificate is presented, the TSF shall [selection: not require client authentication, not establish the connection, request authorization to establish the connection, [assignment: other action]] if the peer certificate is deemed invalid.

Rationale

HTTPS is one of the secure communication protocols, and the Common Criteria does not provide a suitable SFR for the communication protocols using cryptographic algorithms.

This extended component protects the communication data using cryptographic algorithms, and it is therefore placed in the FCS class with a single component.

D.1.2. FCS_IPSEC_EXT Extended: IPsec selected

Family Behaviour

This family addresses requirements for protecting communications using IPsec.

Component Levelling

Example 2. Component Levelling

```
+-----+
|               |               +---+
| FCS_IPSEC_EXT IPsec       +---->| 1 |
|               |               +---+
+-----+
```

FCS_IPSEC_EXT.1 IPsec requires that IPsec be implemented as specified.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- Failure to establish an IPsec SA

D.1.2.1. FCS_IPSEC_EXT.1 Extended: IPsec selected

Hierarchical to:

No other components.

Dependencies:

[if selected: FIA_PSK_EXT.1 Extended: Pre-Shared Key Composition]
 FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)
 FCS_CKM.2 Cryptographic Key Establishment
 FCS_COP.1/DataEncryption Cryptographic operation (Data Encryption/decryption)
 FCS_COP.1/SigGen Cryptographic operation (Signature Generation and Verification)
 FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)
 [if selected: FCS_COP.1/KeyedHash Cryptographic operation (Keyed Hash Algorithm)]
 FCS_RBG_EXT.1 Random Bit Generation

FCS_IPSEC_EXT.1.1 The TSF shall implement the IPsec architecture as specified in RFC 4301.

FCS_IPSEC_EXT.1.2 The TSF shall have a nominal, final entry in the SPD that matches anything that is otherwise unmatched and discards it.

FCS_IPSEC_EXT.1.3 The TSF shall implement [selection: *transport mode, tunnel mode*].

FCS_IPSEC_EXT.1.4 The TSF shall implement the IPsec protocol ESP as defined by RFC 4303 using the cryptographic algorithms [selection: *AES-CBC-128 (RFC 3602), AES-CBC-192 (RFC 3602), AES-CBC-256 (RFC 3602), AES-GCM-128 (RFC 4106), AES-GCM-192 (RFC 4106), AES-GCM-256 (RFC 4106)*], together with a Secure Hash Algorithm (SHA)-based HMAC [selection: *HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-384, HMAC-SHA-512, no HMAC algorithm*].

FCS_IPSEC_EXT.1.5 The TSF shall implement the protocol: [selection:

- *IKEv1, using Main Mode for Phase 1 exchanges, as defined in RFCs 2407, 2408, 2409, RFC 4109, [selection: no other RFCs for extended sequence numbers, RFC 4304 for extended sequence numbers], and [selection: no other RFCs for hash functions, RFC 4868 for hash functions];*
- *IKEv2 as defined in RFCs 5996 [selection: with no support for NAT traversal, with mandatory support for NAT traversal as specified in RFC 5996, section 2.23]], and [selection: no other RFCs for hash functions, RFC 4868 for hash functions]].*

FCS_IPSEC_EXT.1.6 The TSF shall ensure the encrypted payload in the [selection: *IKEv1, IKEv2*] protocol uses the cryptographic algorithms [selection: *AES-CBC-128, AES-CBC-192, AES-CBC-256 (specified in RFC 3602), AES-GCM-128, AES-GCM-192, AES-GCM-256 (specified in RFC 5282)*].

FCS_IPSEC_EXT.1.7 The TSF shall ensure that [selection:

- *IKEv1 Phase 1 SA lifetimes can be configured by a Security Administrator based on [selection:*
 - *number of bytes;*
 - *length of time, where the time values can be configured within [assignment: integer range including 24] hours;];*
- *IKEv2 SA lifetimes can be configured by a Security Administrator based on [selection:*
 - *number of bytes;*
 - *length of time, where the time values can be configured within [assignment: integer range including 24] hours]*

].

FCS_IPSEC_EXT.1.8 The TSF shall ensure that [selection:

- *IKEv1 Phase 2 SA lifetimes can be configured by a Security Administrator based on [selection:*
 - *number of bytes;*
 - *length of time, where the time values can be configured within [assignment: integer range including 8] hours;];*
- *IKEv2 Child SA lifetimes can be configured by a Security Administrator based on [selection:*
 - *number of bytes;*
 - *length of time, where the time values can be configured within [assignment: integer range including 8] hours;]*

].

FCS_IPSEC_EXT.1.9 The TSF shall generate the secret value x used in the IKE Diffie-Hellman key exchange (“ x ” in $gx \bmod p$) using the random bit generator specified in FCS_RBG_EXT.1, and having a length of at least [assignment: (one or more) number(s) of bits that is at least twice the security strength of the negotiated Diffie-Hellman group] bits.

FCS_IPSEC_EXT.1.10 The TSF shall generate nonces used in [selection: *IKEv1, IKEv2*] exchanges of length [selection:

- *according to the security strength associated with the negotiated Diffie-Hellman group;*
- *at least 128 bits in size and at least half the output size of the negotiated pseudorandom function (PRF) hash*

].

FCS_IPSEC_EXT.1.11 The TSF shall ensure that IKE protocols implement DH Group(s) [selection:

- *[selection: 14 (2048-bit MODP), 15 (3072-bit MODP), 16 (4096-bit MODP), 17 (6144-bit MODP), 18 (8192-bit MODP)] according to RFC 3526,*
- *[selection: 19 (256-bit Random ECP), 20 (384-bit Random ECP), 21 (521-bit Random ECP), 24 (2048-bit MODP with 256-bit POS)] according to RFC 5114.*

].

FCS_IPSEC_EXT.1.12 The TSF shall be able to ensure by default that the strength of the symmetric algorithm (in terms of the number of bits in the key) negotiated to protect the [selection: *IKEv1 Phase 1, IKEv2 IKE_SA*] connection is greater than or equal to the strength of the symmetric algorithm (in terms of the number of bits in the key) negotiated to protect the [selection: *IKEv1 Phase 2, IKEv2 CHILD_SA*] connection.

FCS_IPSEC_EXT.1.13 The TSF shall ensure that all IKE protocols perform peer authentication using [selection: *RSA, ECDSA*] that use X.509v3 certificates that conform to RFC 4945 and [selection: *Pre-shared Keys, no other method*].

FCS_IPSEC_EXT.1.14 The TSF shall only establish a trusted channel if the presented identifier in the received certificate matches the configured reference identifier, where the presented and reference identifiers are of the following fields and types: [selection: *SAN: IP address, SAN: Fully Qualified Domain Name (FQDN), SAN: user FQDN, CN: IP address, CN: Fully Qualified Domain Name (FQDN), CN: user FQDN, Distinguished Name (DN)*] and [selection: *no other reference identifier type, [assignment: other supported reference identifier types]*].

Rationale

IPsec is one of the secure communication protocols, and the Common Criteria does not provide a suitable SFR for the communication protocols using cryptographic algorithms.

This extended component protects the communication data using cryptographic algorithms, and it is therefore placed in the FCS class with a single component.

D.1.3. FCS_KYC_EXT Extended: Cryptographic Operation (Key Chaining)

Family Behaviour

This family provides the specification to be used for using multiple layers of encryption keys to ultimately secure the protected data encrypted on the storage.

Component Levelling

Example 3. Component Levelling

```
+-----+
|                                     | +---+
| FCS_KYC_EXT Key Chaining          | +--->| 1 |
|                                     | +---+
+-----+
```

FCS_KYC_EXT Key Chaining, requires the TSF to maintain a key chain and specifies the characteristics of that chain.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.1.3.1. FCS_KYC_EXT.1 Extended: Key Chaining

Hierarchical to:

No other components.

Dependencies:

[FCS_COP.1/KeyWrap Cryptographic operation (Key Wrapping),
FCS_SMC_EXT.1 Extended: Submask Combining,
FCS_CKM.6 Timing and event of cryptographic key destruction,
FCS_COP.1/KeyEnc Cryptographic operation (Key Encryption),
FCS_CKM.5 Cryptographic key derivation,
and/or
FCS_COP.1/KeyTransport Cryptographic operation (Key Transport)].

FCS_KYC_EXT.1.1 The TSF shall maintain a key chain of: [selection: *one, using a submask as the BEV or DEK; intermediate keys originating from one or more submask(s) to the BEV or DEK using the following method(s):* [selection: *key wrapping as specified in FCS_COP.1/KeyWrap, key combining as specified in FCS_SMC_EXT.1, key encryption as specified in FCS_COP.1/KeyEnc, key derivation as specified in FCS_CKM.5, key transport as specified in FCS_COP.1/KeyTransport*]] while maintaining an effective strength of [selection: *128 bits, 256 bits*].

Rationale

Key Chaining ensures that the TSF maintains the key chain, and also specifies the characteristics of that chain. However, the Common Criteria does not provide a suitable SFR for the management of multiple layers of encryption key to protect encrypted data.

This extended component protects the TSF data using cryptographic algorithms, and it is therefore placed in the FCS class with a single component.

D.1.4. FCS_PCC_EXT Extended: Cryptographic Password Construction and Conditioning

Family Behaviour

This family ensures that passwords used to produce the BEV or the DEK are robust (in terms of their composition) and are conditioned to provide an appropriate-length bit string.

Component Levelling

Example 4. Component Levelling

```
+-----+
|                                     | +---+
| FCS_PCC_EXT Cryptographic Password Construction and Conditioning +--->| 1 |
|                                     | +---+
+-----+
```

FCS_PCC_EXT.1 Cryptographic Password Construction and Conditioning, requires the TSF to accept passwords of a certain composition and condition them appropriately.

Management

No specific management functions are identified

Audit

There are no auditable events foreseen.

D.1.4.1. FCS_PCC_EXT.1 Extended: Cryptographic Password Construction and Conditioning

Hierarchical to:

No other components

Dependencies:

FCS_COP.1/KeyedHash Cryptographic Operation (Keyed Hash Algorithm)

FCS_PCC_EXT.1.1 A password used by the TSF to generate a password authorization factor shall enable up to [assignment: *positive integer of 64 or more*] characters in the set of {upper case characters, lower case characters, numbers, and [assignment: *other supported special characters*]} and shall perform Password-based Key Derivation Functions in accordance with a specified cryptographic algorithm [*HMAC*-[selection: *SHA-256, SHA-384, SHA-512*]], with [assignment: *positive integer of 1000 or more*] iterations, and output cryptographic key sizes [selection: *128, 256, 384, 512*] bits that meet the following: [NIST SP 800-132].

Rationale

The TSF is required to ensure that passwords used to produce the BEV or the DEK are robust (in terms of their composition) and are conditioned to provide an appropriate-length bit string.

This extended component protects the Data Encryption Keys using cryptographic algorithms and Robust BEV in the maintained key chains, and it is therefore placed in the FCS class with a single component.


D.1.5. FCS_RBG_EXT Random Bit Generation

Family Behaviour

Components in this family address the requirements for random bit/number generation.

Component Levelling

Example 5. Component Levelling

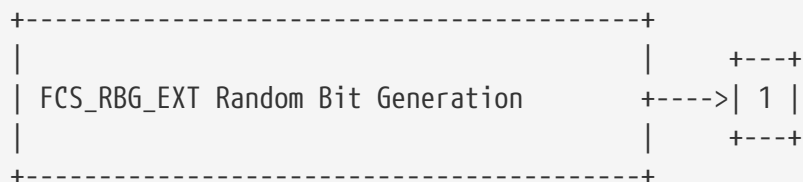

FCS_RBG_EXT.1 Random Bit Generation requires random bit generation to be performed in accordance with selected standards and seeded by an entropy source.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- Minimal: failure of the randomization process

D.1.5.1. FCS_RBG_EXT.1 Extended: Random Bit Generation

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FCS_RBG_EXT.1.1 The TSF shall perform all deterministic random bit generation services in accordance with ISO/IEC 18031:2011 using [selection: *Hash_DRBG (any)*, *HMAC_DRBG (any)*, *CTR_DRBG ([selection: AES, SEED, HIGHT, LEA])*].

FCS_RBG_EXT.1.2 The deterministic RBG shall be seeded by at least one entropy source that accumulates entropy from [selection: *[assignment: number of firmware/software-based sources] firmware/software-based noise source*, *[assignment: number of hardware-based sources] hardware-based noise source*] with a minimum of [selection: *128 bits*, *192 bits*, *256 bits*] of entropy at least

equal to the greatest security strength, according to ISO/IEC 18031:2011 Table C.1 “Security Strength Table for Hash Functions”, of the keys and hashes that it will generate.

Rationale

FCS_RBG_EXT.1 specifies deterministic random bit generation in accordance with ISO/IEC 18031:2011 using an identified DRBG mechanism, and requires the deterministic RBG to be seeded by at least one entropy source that provides a minimum amount of entropy at least equal to the greatest security strength of the keys and hashes that the RBG will generate. The cryptographic SFRs in this cPP that require random bits rely on FCS_RBG_EXT.1 for both the deterministic random bit generation mechanism and the entropy-source seeding requirement.

Common Criteria Part 2 includes a random bit generation component, FCS_RBG.1. FCS_RBG.1 carries a defined dependency structure, including dependencies on FCS_RBG.2 or FCS_RBG.3 for external or internal seeding, and dependencies on FPT_FLS.1, Failure with preservation of secure state, and FPT_TST.1, TSF self-testing. Use of FCS_RBG.1 would therefore require the cPP to include or justify additional dependent requirements that are broader than the random bit generation baseline established for conformant TOEs.

The intended cPP baseline is limited to the deterministic random bit generation mechanism, the applicable standard, and the entropy-source seeding requirement. FCS_RBG_EXT.1 states this baseline precisely as a single, self-contained component, without adding broader failure-state or TSF self-testing requirements that are not part of this random bit generation baseline. It is also referenced consistently by the cryptographic SFRs in this cPP that require random bits.

FCS_RBG_EXT.1 is therefore retained and placed in the FCS class.

D.1.6. FCS_SMC_EXT Extended: Submask Combining

Family Behaviour

This family defines the means by which submasks are combined, if the TOE supports more than one submask being used to derive or protect the BEV or the DEK.

Component Levelling

Example 6. Component Levelling

```
+-----+
|                                     | +---+
| FCS_SMC_EXT Submask combining    +---->| 1 |
|                                     | +---+
+-----+
```

FCS_SMC_EXT.1 Submask combining requires the TSF to combine the submasks in a predictable fashion.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.1.6.1. FCS_SMC_EXT.1 Extended: Submask Combining

Hierarchical to:

No other components.

Dependencies:

FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)

FCS_SMC_EXT.1.1 The TSF shall combine submasks using the following method [selection: *exclusive OR (XOR)*, *SHA-256*, *SHA-384*, *SHA-512*, *HMAC-SHA-384*, *HMAC-SHA-512*] to generate an intermediary key, BEV or DEK.

Rationale

Submask Combining is to ensure the TSF combine the submasks in order to derive or protect the BEV or the DEK.

This extended component protects the TSF data using cryptographic algorithms, and it is therefore placed in the FCS class with a single component.

D.1.7. FCS_SNI_EXT Extended: Cryptographic Operation (Salt and Nonce Generation)

Family Behaviour

This family ensures that salts and nonces are well formed.

Component Levelling

Example 7. Component Levelling

```
+-----+
|                                             | +---+
| FCS_SNI_EXT Cryptographic Operation (Salt and | +--->| 1 |
| Nonce Generation)                         | | +---+
|                                             |
+-----+
```

FCS_SNI_EXT.1 Cryptographic Operation (Salt and Nonce Generation), requires the generation of salts and nonces to be used by the cryptographic components of the TOE to be performed in the specified manner.

Management

No specific management functions are identified

Audit

There are no auditable events foreseen.

D.1.7.1. FCS_SNI_EXT.1 Extended: Cryptographic Operation (Salt and Nonce Generation)

Hierarchical to:
No other components

Dependencies:
FCS_RBG_EXT.1 Random Bit Generation

FCS_SNI_EXT.1.1 The TSF shall only use salts that are generated by a RNG as specified in FCS_RBG_EXT.1.

FCS_SNI_EXT.1.2 The TSF shall only use unique nonces with a minimum size of [64] bits.

Rationale

The TSF is required to ensure that the generation of salts and nonces to be used by the cryptographic components of the TOE is to be performed in the specified manner.

This extended component protects the communication data and storage data using cryptographic algorithms with specified Salt and Nonce Generation, and it is therefore placed in the FCS class with a single component.

D.1.8. FCS_SSHC_EXT SSH Client

Family Behaviour

The component in this family addresses the ability for a client to use SSH to protect data between the client and a server using the SSH protocol.

Component Levelling

Example 8. Component Levelling





FCS_SSHC_EXT.1 SSH Client requires that the client side of SSH be implemented as specified.

Management: FCS_SSHC_EXT.1 The following actions could be considered for the management functions in FMT:

- There are no management activities foreseen.

Audit: FCS_SSHC_EXT.1

The following actions should be considered for audit if FAU_GEN Security audit data generation is included in the PP/ST:

- Failure of SSH session establishment
- SSH session establishment
- SSH session termination

D.1.8.1. FCS_SSHC_EXT.1 Extended: SSH Client Protocol

Hierarchical to:

No other components

Dependencies:

FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)

FCS_CKM.2 Cryptographic Key Establishment

FCS_COP.1/DataEncryption Cryptographic operation (Data Encryption/decryption)

FCS_COP.1/SigGen Cryptographic operation (Signature Generation and Verification)

FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)

FCS_COP.1/KeyedHash Cryptographic operation (Keyed Hash Algorithm)

FCS_RBG_EXT.1 Random Bit Generation

FCS_SSHC_EXT.1.1 The TSF shall implement the SSH protocol in accordance with: RFCs 4251, 4252, 4253, 4254, [selection: 4256, 4344, 5647, 5656, 6187, 6668, 8268, 8308 section 3.1, 8332].

FCS_SSHC_EXT.1.2 The TSF shall ensure that the SSH protocol implementation supports the following authentication methods as described in RFC 4252: public key-based, [selection: *password-based*, *no other method*].

FCS_SSHC_EXT.1.3 The TSF shall ensure that, as described in RFC 4253, packets greater than [assignment: *number of bytes*] bytes in an SSH transport connection are dropped.

FCS_SSHC_EXT.1.4 The TSF shall ensure that the SSH transport implementation uses the following encryption algorithms and rejects all other encryption algorithms: [selection: *aes128-cbc*, *aes256-cbc*, *aes128-ctr*, *aes256-ctr*, *AEAD_AES_128_GCM*, *AEAD_AES_256_GCM*, [aes128-gcm@openssh.com](https://openssh.com/aes128-gcm), [aes256-gcm@openssh.com](https://openssh.com/aes256-gcm)].

FCS_SSHC_EXT.1.5 The TSF shall ensure that the SSH public-key based authentication implementation uses [selection: *ssh-rsa*, *rsa-sha2-256*, *rsa-sha2-512*, *ecdsa-sha2-nistp256*, *x509v3-ssh-rsa*, *ecdsa-sha2-nistp384*, *ecdsa-sha2-nistp521*, *x509v3-ecdsa-sha2-nistp256*, *x509v3-ecdsa-sha2-nistp384*, *x509v3-ecdsa-sha2-nistp521*, *x509v3-rsa2048-sha256*] as its public key algorithm(s) and rejects all other public key algorithms

FCS_SSHC_EXT.1.6 The TSF shall ensure that the SSH transport implementation uses [selection: *hmac-sha1*, *hmac-sha1-96*, *hmac-sha2-256*, *hmac-sha2-512*, *AEAD_AES_128_GCM*, *AEAD_AES_256_GCM*, *implicit*] as its data integrity MAC algorithm(s) and rejects all other MAC algorithm(s).

FCS_SSHC_EXT.1.7 The TSF shall ensure that [selection: *diffie-hellman-group14-sha1*, *diffie-hellman-group15-sha512*, *ecdh-sha2-nistp256*] and [selection: *diffie-hellman-group14-sha256*, *diffie-hellman-group16-sha512*, *diffie-hellman-group17-sha512*, *diffie-hellman-group18-sha512*, *ecdh-sha2-nistp384*, *ecdh-sha2-nistp521*, *no other methods*] are the only allowed key exchange methods used for the SSH protocol.

FCS_SSHC_EXT.1.8 The TSF shall ensure that within SSH connections, the same session keys are used for a threshold of no longer than one hour, and each encryption key is used to protect no more than one gigabyte of data. After any of the thresholds are reached, a rekey needs to be performed.

FCS_SSHC_EXT.1.9 The TSF shall ensure that the SSH client authenticates the identity of the SSH server using a local database associating each host name with its corresponding public key and [selection: *a list of trusted certification authorities, no other methods*] as described in RFC 4251 section 4.1.

Rationale

SSH is used by the SFRs to establish a trusted channel/path as a client, and the Common Criteria does not provide a suitable SFR for the SSH client protocol.

This extended component ensures the secure operation of the SSH client protocol, and it is therefore placed in the FCS class.

D.1.9. FCS SSHS EXT SSH Server Protocol

Family Behaviour The component in this family addresses the ability for a server to offer SSH to protect data between a client and the server using the SSH protocol.

Component Levelling

Example 9. Component Levelling



FCS_SSHS_EXT.1 SSH Server requires that the server side of SSH be implemented as specified.

Management: FCS_SSHS_EXT.1 The following actions could be considered for the management functions in FMT:

- There are no management activities foreseen.

Audit: FCS_SSHS_EXT.1

The following actions should be considered for audit if FAU_GEN Security audit data generation is included in the PP/ST:

- Failure of SSH session establishment
- SSH session establishment
- SSH session termination

D.1.9.1. FCS_SSHS_EXT.1 Extended: SSH Server Protocol

Hierarchical to:

No other components

Dependencies:

FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)

FCS_CKM.2 Cryptographic Key Establishment

FCS_COP.1/DataEncryption Cryptographic operation (Data Encryption/decryption)

FCS_COP.1/SigGen Cryptographic operation (Signature Generation and Verification)

FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)

FCS_COP.1/KeyedHash Cryptographic operation (Keyed Hash Algorithm)

FCS_RBG_EXT.1 Random Bit Generation

FCS_SSHS_EXT.1.1 The TSF shall implement the SSH protocol in accordance with: RFCs 4251, 4252, 4253, 4254, [selection: 4256, 4344, 5647, 5656, 6187, 6668, 8268, 8308 section 3.1, 8332].

FCS_SSHS_EXT.1.2 The TSF shall ensure that the SSH protocol implementation supports the following authentication methods as described in RFC 4252: public key-based, [selection: *password-based, no other method*].

FCS_SSHS_EXT.1.3 The TSF shall ensure that, as described in RFC 4253, packets greater than [assignment: *number of bytes*] bytes in an SSH transport connection are dropped.

FCS_SSHS_EXT.1.4 The TSF shall ensure that the SSH transport implementation uses the following encryption algorithms and rejects all other encryption algorithms: [selection: *aes128-cbc, aes256-cbc, aes128-ctr, aes256-ctr, AEAD_AES_128_GCM, AEAD_AES_256_GCM, aes128-gcm@openssh.com, aes256-gcm@openssh.com*].

FCS_SSHS_EXT.1.5 The TSF shall ensure that the SSH public-key based authentication implementation uses [selection: *ssh-rsa, rsa-sha2-256, rsa-sha2-512, ecdsa-sha2-nistp256, x509v3-ssh-rsa, ecdsa-sha2-nistp384, ecdsa-sha2-nistp521, x509v3-ecdsa-sha2-nistp256, x509v3-ecdsa-sha2-*

nistp384, x509v3-ecdsa-sha2-nistp521, x509v3-rsa2048-sha256] as its public key algorithm(s) and rejects all other public key algorithms.

FCS_SSHS_EXT.1.6 The TSF shall ensure that the SSH transport implementation uses [selection: *hmac-sha1, hmac-sha1-96, hmac-sha2-256, hmac-sha2-512, AEAD_AES_128_GCM, AEAD_AES_256_GCM, implicit*] as its MAC algorithm(s) and rejects all other MAC algorithm(s).

FCS_SSHS_EXT.1.7 The TSF shall ensure that [selection: *diffie-hellman-group14-sha1, diffie-hellman-group15-sha512, ecdh-sha2-nistp256*] and [selection: *diffie-hellman-group14-sha256, diffie-hellman-group16-sha512, diffie-hellman-group17-sha512, diffie-hellman-group18-sha512, ecdh-sha2-nistp384, ecdh-sha2-nistp521, no other methods*] are the only allowed key exchange methods used for the SSH protocol.

FCS_SSHS_EXT.1.8 The TSF shall ensure that within SSH connections, the same session keys are used for a threshold of no longer than one hour, and each encryption key is used to protect no more than one gigabyte of data. After any of the thresholds are reached, a rekey needs to be performed.

Rationale

SSH is used by the SFRs to establish a trusted channel/path as a server, and the Common Criteria does not provide a suitable SFR for the SSH server protocol.

This extended component ensures the secure operation of the SSH server protocol, and it is therefore placed in the FCS class.

D.2. User Data Protection (FDP)


D.2.1. FDP_DSK_EXT Extended: Protection of Data on Storage Devices

Family Behaviour

This family is to mandate the encryption of all protected data written to the storage.

Component Levelling

Example 10. Component Levelling

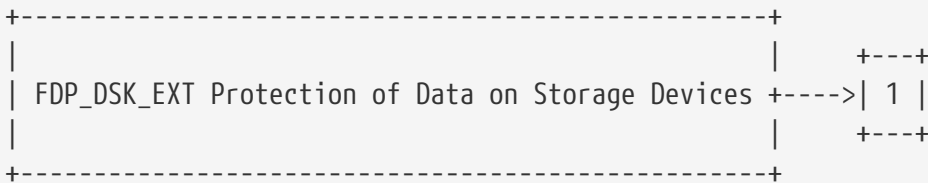

FDP_DSK_EXT.1 Protection of Data on Storage Devices, requires the TSF to encrypt all the Confidential TSF and User Data stored on the Nonvolatile Storage Devices in order to avoid storing these data in plaintext on the devices.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.2.1.1. FDP_DSK_EXT.1 Extended: Protection of Data on Storage Devices

Hierarchical to:

No other components.

Dependencies:

FCS_COP.1/StorageEncryption Cryptographic operation (Data Encryption/Decryption)

FDP_DSK_EXT.1.1 The TSF shall [selection: *perform encryption in accordance with FCS_COP.1/StorageEncryption, use a self-encrypting Nonvolatile Storage Device that is separately CC certified to conform to the FDE EE cpp*] such that any Nonvolatile Storage Device contains no plaintext User Document Data and no plaintext Confidential TSF Data.

FDP_DSK_EXT.1.2 The TSF shall encrypt all protected data without user intervention.

Rationale

Extended: Protection of Data on Storage Devices is to specify that encryption of any confidential data without user intervention, and the Common Criteria does not provide a suitable SFR for the Protection of Data on Storage Devices.

This extended component protects the Data on Storage Devices, and it is therefore placed in the FDP class with a single component.

D.2.2. FDP_FXS_EXT Extended: Fax Separation

Family Behaviour

This family addresses the requirements for separation between Fax PSTN line and the LAN to which TOE is connected.

Component Levelling

Example 11. Component Levelling

```
+-----+
|                                     |
| FDP_FXS_EXT Fax Separation        |
|                                     |
+-----+> 1 |
```



FDP_FXS_EXT.1 Fax Separation, requires the fax interface cannot be used to create a network bridge between a PSTN and a LAN to which TOE is connected.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.2.2.1. FDP_FXS_EXT.1 Extended: Fax separation

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FDP_FXS_EXT.1.1 The TSF shall prohibit communication via the fax interface, except transmitting or receiving User Data using fax protocols.

Rationale

Fax Separation is to protect a LAN against attack from PSTN line, and the Common Criteria does not provide a suitable SFR for the Protection of TSF or User Data.

This extended component protects the TSF Data or User Data, and it is therefore placed in the FDP class with a single component.

D.2.3. FDP_UDU_EXT Extended: Document Unavailability

Family Behaviour

This family is to overwrite Document Data from Nonvolatile Storage Devices

Component Levelling

```

+-----+
| FDP_UDU_EXT Document Unavailability | +---+
|                                     +--->| 1 |
|                                     +---+
+-----+

```

FDP_UDU_EXT.1 Document Unavailability, requires the TSF to make User Document Data stored on wear-leveling and non-wear-leveling storage devices unavailable via either overwrite or destruction of cryptographic keys to ensure that this data does not remain on the device in the TOE after a Document Processing job has been completed or cancelled.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.2.3.1. FDP_UDU_EXT.1 Extended: Document Unavailability

Hierarchical to:

No other components

Dependencies:

No dependencies.

FDP_UDU_EXT.1.1 The TSF shall ensure that any previous information content stored on a [selection: *wear-leveled storage device*, *non-wear-leveled storage device*] of a resource is made unavailable [selection: *by overwriting data*, *by destroying its cryptographic key*] upon the deallocation of the resource from the following objects: [assignment: *list of objects*].

Rationale

Extended: Document Unavailability specifies the overwrite of or destruction of cryptographic keys for User Document Data stored on either wear-leveling or non-wear-leveling storage devices after completion or cancellation of the job without user intervention, and the Common Criteria does not provide a suitable SFR for this requirement. This extended component protects User Document Data on Storage Devices, and it is therefore placed in the FDP class with a single component.

D.3. Identification and Authentication (FIA)

D.3.1. FIA_PMG_EXT Extended: Password Management

Family Behaviour

This family defines requirements for the attributes of passwords used by administrative users to ensure that strong passwords and passphrases can be chosen and maintained.

Component Levelling

Example 13. Component Levelling

```
+-----+
|                                     | +---+
| FIA_PMG_EXT Password management | +--->| 1 |
|                                     | +---+
+-----+
```

FIA_PMG_EXT.1 Password management requires the TSF to support passwords with varying composition requirements, minimum lengths, maximum lifetime, and similarity constraints.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.3.1.1. FIA_PMG_EXT.1 Extended: Password management

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FIA_PMG_EXT.1.1 The TSF shall provide the following password management capabilities for User passwords:

- Passwords shall be able to be composed of any combination of upper and lower case letters,

numbers, and the following special characters: [selection: “!”, “@”, “#”, “\$”, “%”, “^”, “&”, “*”, “(“, “)”, [assignment: other characters]];

- Minimum password length shall be settable by an Administrator, and have the capability to require passwords of 15 characters or greater.

Rationale

FIA_PMG_EXT.1 specifies password management capabilities for User passwords, including permitted password composition using upper-case letters, lower-case letters, numbers, and a selectable set of special characters, as well as a minimum password length that is settable by an Administrator and capable of being configured to require 15 characters or greater.

The Common Criteria Part 2 component FIA_SOS.1, Verification of secrets, provides for verification that secrets meet a defined quality metric and can express password-composition requirements. However, FIA_SOS.1 does not clearly express the full password management capability required by this cPP. In particular, FIA_SOS.1 verifies secrets against a defined metric, but it does not express the requirement for an Administrator-settable minimum password length as part of the password management capability.

FIA_PMG_EXT.1 is therefore defined to state the intended password management requirement precisely as a single component: permitted password composition together with an Administrator-settable minimum password length. No existing Common Criteria Part 2 component clearly expresses this integrated password management capability as intended by this cPP.

The component is placed in the FIA class as a single component.

D.3.2. FIA_PSK_EXT Extended: Pre-Shared Key Composition

Family Behaviour

This family defines requirements for the TSF to ensure the ability to use pre-shared keys for IPsec.

Component Levelling

Example 14. Component Levelling

```
+-----+
|                                     | +---+
| FIA_PSK_EXT Pre-Shared Key Composition +--->| 1 |
|                                     | +---+
+-----+
```

FIA_PSK_EXT.1 Pre-Shared Key Composition, ensures authenticity and access control for updates.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.3.2.1. FIA_PSK_EXT.1 Extended: Pre-Shared Key Composition

Hierarchical to:

No other components.

Dependencies:

[if selected: FCS_COP.1/Hash Cryptographic Operation (Hash Algorithm)],

[if selected: FCS_RBG_EXT.1 Random Bit Generation]

FIA_PSK_EXT.1.1 The TSF shall be able to use pre-shared keys for IPsec.

FIA_PSK_EXT.1.2 The TSF shall be able to accept text-based pre-shared keys that are:

- 22 characters in length and [selection: *[assignment: other supported lengths]*, *no other lengths*];
- composed of any combination of upper and lower case letters, numbers, and special characters (that include: “!”, “@”, “#”, “\$”, “%”, “^”, “&”, “*”, “(”, and “”).

FIA_PSK_EXT.1.3 The TSF shall condition the text-based pre-shared keys by using [selection: *SHA-1*, *SHA-256*, *SHA-384*, *SHA-512*, *[assignment: method of conditioning text string]*] and be able to [selection: *use no other pre-shared keys*; *accept bit-based pre-shared keys*; *generate bit-based pre-shared keys using the random bit generator specified in FCS_RBG_EXT.1*].

Rationale

Pre-shared Key Composition is to ensure the strong authentication between the endpoints of communications, and the Common Criteria does not provide a suitable SFR for the Pre-shared Key Composition.

This extended component protects the TOE by means of strong authentication, and it is therefore placed in the FIA class with a single component.

D.3.3. Authentication using X.509 certificates (FIA_X509_EXT)

Family Behaviour

This family defines the behaviour, management, and use of X.509 certificates for functions to be performed by the TSF. Components in this family require validation of certificates according to a specified set of rules, use of certificates for authentication for protocols and integrity verification, and the generation of certificate requests.

Component Levelling

FIA_X509_EXT.1 X509 Certificate Validation, requires the TSF to check and validate certificates in accordance with the RFCs and rules specified in the component.

FIA_X509_EXT.2 X509 Certificate Authentication, requires the TSF to use certificates to authenticate peers in protocols that support certificates, as well as for integrity verification and potentially other functions that require certificates.

FIA_X509_EXT.3 X509 Certificate Requests, requires the TSF to be able to generate Certificate Request Messages and validate responses.

Management: FIA_X509_EXT.1, FIA_X509_EXT.2, FIA_X509_EXT.3

The following actions could be considered for the management functions in FMT:

- Remove imported X.509v3 certificates
- Approve import and removal of X.509v3 certificates
- Initiate certificate requests

Audit: FIA_X509_EXT.1, FIA_X509_EXT.2, FIA_X509_EXT.3

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- Minimal: No specific audit requirements are specified.

D.3.3.1. FIA_X509_EXT.1 X.509 Certificate Validation

Hierarchical to:

No other components

Dependencies:

FIA_X509_EXT.2 X.509 Certificate Authentication

FIA_X509_EXT.1.1 The TSF shall validate certificates in accordance with the following rules:

- RFC 5280 certificate validation and certification path validation **supporting a minimum path length of three certificates**.
- The certification path must terminate with a trusted CA certificate designated as a trust anchor.
- The TSF shall validate a certification path by ensuring that all CA certificates in the certification path contain the basicConstraints extension with the CA flag set to TRUE.
- The TSF shall validate the revocation status of the certificate using [selection: *the Online Certificate Status Protocol (OCSP) as specified in RFC 6960, a Certificate Revocation List (CRL) as specified in RFC 5280 Section 6.3, Certificate Revocation List (CRL) as specified in RFC 5759 Section 5*].
- The TSF shall validate the extendedKeyUsage field according to the following rules:

- *Certificates used for trusted updates and executable code integrity verification shall have the Code Signing purpose (id-kp 3 with OID 1.3.6.1.5.5.7.3.3) in the extendedKeyUsage field.*
- *Server certificates presented for TLS shall have the Server Authentication purpose (id-kp 1 with OID 1.3.6.1.5.5.7.3.1) in the extendedKeyUsage field.*
- *Client certificates presented for TLS shall have the Client Authentication purpose (id-kp 2 with OID 1.3.6.1.5.5.7.3.2) in the extendedKeyUsage field.*
- *OCSP certificates presented for OCSP responses shall have the OCSP Signing purpose (id-kp 9 with OID 1.3.6.1.5.5.7.3.9) in the extendedKeyUsage field.*

FIA_X509_EXT.1.2 The TSF shall only treat a certificate as a CA certificate if the basicConstraints extension is present and the CA flag is set to TRUE.

D.3.3.2. FIA_X509_EXT.2 X509 Certificate Authentication

Hierarchical to:

No other components

Dependencies:

FIA_X509_EXT.1 X.509 Certificate Validation

FIA_X509_EXT.2.1 The TSF shall use X.509v3 certificates as defined by RFC 5280 to support authentication for [selection: *DTLS, HTTPS, IPsec, TLS, SSH*, [assignment: *other protocols*], *no protocols*], and [selection: *code signing for system firmware/software updates* [assignment: *other uses*], *no additional uses*].

FIA_X509_EXT.2.2 When the TSF cannot establish a connection to determine the validity of a certificate, the TSF shall [selection: *allow the Administrator to choose whether to accept the certificate in these cases*, *accept the certificate*, *not accept the certificate*].

D.3.3.3. FIA_X509_EXT.3 X.509 Certificate Requests

Hierarchical to:

No other components

Dependencies:

FCS_CKM.1/AKG Cryptographic Key Generation (Asymmetric Keys)

FIA_X509_EXT.1 X.509 Certificate Validation

FIA_X509_EXT.3.1 The TSF shall generate a Certificate Request as specified by RFC 2986 and be able to provide the following information in the request: public key and [selection: *device-specific information*, *Common Name*, *Organization*, *Organizational Unit*, *Country*, [assignment: *other information*]].

FIA_X509_EXT.3.2 The TSF shall validate the chain of certificates from the Root CA upon receiving

the CA Certificate Response.

Rationale

X.509 certificates are used by the SFRs for authentication, certificate validation, and certificate request generation, and the Common Criteria does not provide a suitable SFR for these functions.

This extended component ensures the validation, authentication, and request of X.509 certificates, and it is therefore placed in the FIA class.

D.4. Protection of the TSF (FPT)

D.4.1. FPT_WIPE_EXT Extended: Data Wiping

Family Behaviour

This family is to make customer-supplied User and TSF Data stored in Nonvolatile Storage Devices unavailable upon the request of an Administrator

Component Levelling

Example 15. Component Levelling

```
+-----+
|                                     | +---+
| FPT_WIPE_EXT Data Wiping          | +--->| 1 |
|                                     | +---+
+-----+
```

FPT_WIPE_EXT.1 Data Wiping, requires the TSF to make User and TSF Data stored on Nonvolatile Storage Devices unavailable upon request of an Administrator using cryptographic erase and optionally additional other media-specific methods.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.4.1.1. FPT_WIPE_EXT.1 Extended: Data Wiping

No other components

No dependencies.

- *logically addresses the storage location of the data and performs a [selection: single, [assignment: ST author defined multi-pass]] overwrite consisting of [selection: zeroes, ones, pseudo-random pattern, any value that does not contain any CSPs],*
- *block erase,*
- *media specific eMMC method,*
- *media specific ATA erase method,*
- *media specific NVMe method,*
- *no other method*

] that meets the following: [no standard].


Extended: Data Wiping specifies the making of both User and TSF data unavailable upon Administrator request via cryptographic erase and other optional media-specific methods, and the Common Criteria does not provide a suitable SFR for this requirement. This extended component protects TOE from unauthorized disclosure of TSF data after decommissioning or redeployment, and it is therefore placed in the FPT class with a single component.

Family Behaviour

This family addresses the requirements for verifying firmware/software integrity each time that it is powered on.

Component Levelling

Example 16. Component Levelling



+-----+

FPT_SBT_EXT.1 Secure Boot, uses a Root of Trust to confirm the integrity of the device's firmware/software at boot time.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.4.2.1. FPT_SBT_EXT.1 Extended: Secure Boot

Hierarchical to:

No other components.

Dependencies:

[if selected: FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)],
[if selected: FCS_COP.1/SigGen Cryptographic Operation (for signature generation/verification)],
[if selected: FCS_COP.1/KeyedHash Cryptographic Operation (for keyed-hash message authentication), and/or FCS_COP.1/CMAC Cryptographic Operation (for cipher-based message authentication)]

FPT_SBT_EXT.1.1 The TSF shall contain one or more chains of trust with each chain of trust anchored in an immutable Root of Trust.

FPT_SBT_EXT.1.2 At boot time the TSF shall use the chain(s) of trust to confirm integrity of its firmware/software using a [selection: *hash, digital signature, message authentication*] verification method.

FPT_SBT_EXT.1.3 The TSF shall [selection: *enter maintenance mode, halt boot process, reboot the device, [assignment: another behavior of TOE]*] in the event of a boot time verification failure so that the corrupted firmware/software isn't executed.

FPT_SBT_EXT.1.4 Following failure of verification, the TSF shall provide a mechanism to: [selection: *revert to previous TOE image, reinstall TOE image, perform a factory reset, indicate a need to contact vendor support*].

FPT_SBT_EXT.1.5 The TSF shall contain [selection: *hash data, digital signature data, message authentication code, public key for digital signature, symmetric key for message authentication with confidentiality protection as defined in FPT_SBT_EXT.1.6*] in the Hardware Root of Trust.

FPT_SBT_EXT.1.6 The TSF shall make the symmetric key accessible only to the Hardware Root of Trust.

Rationale

Secure Boot is to verify the integrity of the boot process starting with the hardware-anchored Root of Trust and then verifying each link in the corresponding Chain of Trust to ensure that no corrupted firmware/software is executed.

This extended component verifies the integrity of the Chains of Trusts which are TSF data, and it is therefore placed in the FPT class with a single component.

D.4.3. FPT_KYP_EXT Extended: Protection of Key and Key Material

Family Behaviour

This family addresses the requirements for keys and key materials to be protected if and when written to nonvolatile storage.

Component Levelling

Example 17. Component Levelling

```
+-----+
|                                     | +---+
| FPT_KYP_EXT Protection of key and key material +--->| 1 |
|                                     | +---+
+-----+
```

FPT_KYP_EXT.1 Protection of key and key material, requires the TSF to ensure that no plaintext key or key materials are written to nonvolatile storage.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.4.3.1. FPT_KYP_EXT.1 Extended: Protection of Key and Key Material

Hierarchical to:

No other components.

Dependencies:

FCS_KYC_EXT.1 Extended: Key Chaining,

[if selected: FCS_COP.1/KeyWrap Cryptographic operation (Key Wrapping)],

[if selected: FCS_COP.1/KeyEnc Cryptographic operation (Key Encryption) and/or FCS_COP.1/KeyTransport Cryptographic operation (Key Transport)],

[if selected: FCS_SMC_EXT.1 Extended: Submask Combining]

FPT_KYP_EXT.1.1 The TSF shall [selection:

- *not store keys in nonvolatile memory*
- *only store keys in nonvolatile memory when wrapped, as specified in FCS_COP.1/KeyWrap, or encrypted, as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport*
- *only store plaintext keys that meet any one of the following criteria [selection:*
 - *the key will no longer provide access to the encrypted data after initial provisioning,*
 - *the key is a key split that is combined as specified in FCS_SMC_EXT.1, and the other half of the key split is [selection:*
 - *wrapped as specified in FCS_COP.1/KeyWrap,*
 - *encrypted as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport,*
 - *derived and not stored in nonvolatile memory],*
 - *the key is [selection: used to wrap a key as specified in FCS_COP.1/KeyWrap, used to encrypt a key as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport] that is already [selection: wrapped as specified in FCS_COP.1/KeyWrap, encrypted as specified in FCS_COP.1/KeyEnc or FCS_COP.1/KeyTransport],*
 - *the nonvolatile memory where the key is stored on is located in a protected storage device]*

].

Rationale

Protection of Key and Key Material is to ensure that no plaintext key or key material are written to nonvolatile storage, and the Common Criteria does not provide a suitable SFR for the protection of key and key material.

This extended component protects the TSF data, and it is therefore placed in the FPT class with a single component.

D.4.4. FPT_SKP_EXT Extended: Protection of TSF Data**Family Behaviour**

This family addresses the requirements for managing and protecting the TSF data, such as cryptographic keys. This is a new family modelled as the FPT Class.

Component Levelling

```
+-----+
|                                     | +---+
| FPT_SKP_EXT Protection of TSF Data | +--->| 1 |
|                                     | +---+
+-----+
```

FPT_SKP_EXT.1 Protection of TSF Data (for reading all symmetric keys), requires preventing symmetric keys from being read by any user or subject. It is the only component of this family.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.4.4.1. FPT_SKP_EXT.1 Extended: Protection of TSF Data

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FPT_SKP_EXT.1.1 The TSF shall prevent reading of all pre-shared keys, symmetric keys, and private keys.

Rationale

Protection of TSF Data is to ensure the pre-shared keys, symmetric keys and private keys are protected securely, and the Common Criteria does not provide a suitable SFR for the protection of such TSF data.

This extended component protects TSF data by preventing the reading of key material, and it is therefore placed in the FPT class.

D.4.5. FPT_TST_EXT Extended: TSF testing

Family Behaviour

This family addresses the requirements for self-testing the TSF for selected correct operation.

Component Levelling

Example 19. Component Levelling

```
+-----+
|                                     | +---+
| FPT_TST_EXT TSF testing           | +--->| 1 |
|                                     | +---+
+-----+
```

FPT_TST_EXT.1 TSF testing requires a suite of self-testing to be run during initial start-up in order to demonstrate correct operation of the TSF.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.4.5.1. FPT_TST_EXT.1 Extended: TSF testing

Hierarchical to:

No other components.

Dependencies:

No dependencies.

FPT_TST_EXT.1.1 The TSF shall run a suite of self-tests during initial start-up (and power on) to demonstrate the correct operation of the TSF.

Rationale

FPT_TST_EXT.1 specifies a start-up operational self-test requirement: the TSF runs a suite of self-tests during initial start-up, including power-on, to demonstrate correct operation of the TSF.

The Common Criteria Part 2 component FPT_TST.1 also addresses TSF self-testing. However, FPT_TST.1 is defined as a three-element component. When claimed, it also requires verification of the integrity of TSF data and stored TSF executable code. These elements cannot be omitted. As a result, FPT_TST.1 cannot clearly express the intended CPP requirement without importing

additional mandatory requirements that are outside the intended baseline.

Verification of stored TSF executable-code integrity is already addressed by this cPP through FPT_SBT_EXT.1, Secure Boot. FPT_SBT_EXT.1.2 requires boot-time verification of firmware/software integrity anchored in a hardware Root of Trust, which is specific to the boot architecture of HCD TOEs and more precise than the generic executable-code integrity verification required by FPT_TST.1.

This cPP establishes a security baseline that requires demonstration of correct TSF operation at start-up. It does not mandate general verification of TSF-data integrity across all conformant TOEs. Therefore, FPT_TST_EXT.1 is necessary to state the intended baseline requirement precisely, without importing FPT_TST.1 elements that are either already addressed by FPT_SBT_EXT.1 or outside the intended baseline. The extended component is placed in the FPT class as a single component.


D.4.6. FPT_TUD_EXT Extended: Trusted Update

Family Behaviour

This family defines requirements for the TSF to ensure that only administrators can update the TOE firmware/software, and that such firmware/software is authentic.

Component Levelling

Example 20. Component Levelling

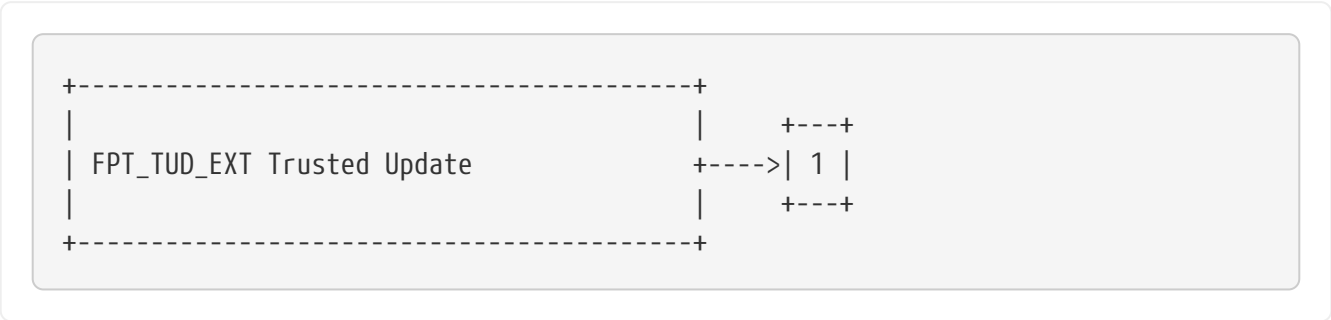

FPT_TUD_EXT.1 Trusted Update, ensures authenticity and access control for updates.

Management

The following actions could be considered for the management functions in FMT:

- There are no management actions foreseen.

Audit

The following actions should be auditable if FAU_GEN Security Audit Data Generation is included in the PP/ST:

- There are no auditable events foreseen.

D.4.6.1. FPT_TUD_EXT.1 Trusted Update

Hierarchical to:

No other components.

Dependencies:

[if selected: FCS_COP.1/SigGen Cryptographic Operation (for signature generation/verification)],

[if selected: FIA_X509_EXT.1 X.509 Certificate Validation],

[if selected: FCS_COP.1/Hash Cryptographic operation (Hash Algorithm)]

FPT_TUD_EXT.1.1 The TSF shall provide authorized administrators the ability to query the current version of the TOE firmware/software.

FPT_TUD_EXT.1.2 The TSF shall provide authorized administrators the ability to initiate updates to TOE firmware/software.

FPT_TUD_EXT.1.3 The TSF shall provide a means to verify firmware/software updates to the TOE using [selection: *digital signature, X.509 certificate*] and [selection: *published hash, no other functions*] prior to installing those updates.

Rationale

Firmware/software is a form of TSF Data, and the Common Criteria does not provide a suitable SFR for the management of firmware/software. In particular, there is no SFR defined for importing TSF Data.

This extended component protects the TOE, and it is therefore placed in the FPT class with a single component.

Appendix E: Entropy Documentation and Assessment

E.1. Design Description

Documentation shall include the design of each entropy source as a whole, including the interaction of all entropy source components. Any information that can be shared regarding the design should also be included for any third-party entropy sources that are included in the product.

The documentation will describe the operation of the entropy source to include how entropy is produced, and how unprocessed (raw) data can be obtained from within the entropy source for testing purposes. The documentation should walk through the entropy source design indicating where the entropy comes from, where the entropy output is passed next, any post-processing of the raw outputs (hash, XOR, etc.), if/where it is stored, and finally, how it is output from the entropy source. Any conditions placed on the process (e.g., blocking) should also be described in the entropy source design. Diagrams and examples are encouraged.

This design must also include a description of the content of the security boundary of the entropy source and a description of how the security boundary ensures that an adversary outside the boundary cannot affect the entropy rate.

If implemented, the design description shall include a description of how third-party applications can add entropy to the RBG. A description of any RBG state saving between power-off and power-on shall be included.

E.2. Entropy Justification

There should be a technical argument for where the unpredictability in the source comes from and why there is confidence in the entropy source delivering sufficient entropy for the uses made of the RBG output (by this particular TOE). This argument will include a description of the expected min-entropy rate (i.e. the minimum entropy (in bits) per bit or byte of source data) and explain that sufficient entropy is going into the TOE randomizer seeding process. This discussion will be part of a justification for why the entropy source can be relied upon to produce bits with entropy.

The amount of information necessary to justify the expected min-entropy rate depends on the type of entropy source included in the product.

For developer-provided entropy sources, in order to justify the min-entropy rate, it is expected that a large number of raw source bits will be collected, statistical tests will be performed, and the min-entropy rate determined from the statistical tests. While no particular statistical tests are required at this time, it is expected that some testing is necessary in order to determine the amount of min-entropy in each output.

For third-party provided entropy sources, in which the TOE vendor has limited access to the design and raw entropy data of the source, the documentation will indicate an estimate of the amount of min-entropy obtained from this third-party source. It is acceptable for the vendor to “assume” an amount of min-entropy, however, this assumption must be clearly stated in the documentation

provided. In particular, the min-entropy estimate must be specified and the assumption included in the ST.

Regardless of the type of entropy source, the justification will also include how the DRBG is initialized with the entropy stated in the ST, for example by verifying that the min-entropy rate is multiplied by the amount of source data used to seed the DRBG or that the rate of entropy expected based on the amount of source data is explicitly stated and compared to the statistical rate. If the amount of source data used to seed the DRBG is not clear or the calculated rate is not explicitly related to the seed, the documentation will not be considered complete.

The entropy justification shall not include any data added from any third-party application or from any state saving between restarts.

E.3. Operating Conditions

The entropy rate may be affected by conditions outside the control of the entropy source itself. For example, voltage, frequency, temperature, and elapsed time after power-on are just a few of the factors that may affect the operation of the entropy source. As such, documentation will also include the range of operating conditions under which the entropy source is expected to generate random data. Similarly, documentation shall describe the conditions under which the entropy source is no longer guaranteed to provide sufficient entropy. Methods used to detect failure or degradation of the source shall be included.

E.4. Health Testing

More specifically, all entropy source health tests and their rationale will be documented. This will include a description of the health tests, the rate and conditions under which each health test is performed (e.g., at start up, continuously, or on-demand), the expected results for each health test, TOE behavior upon entropy source failure, and rationale indicating why each test is believed to be appropriate for detecting one or more failures in the entropy source.

Appendix F: Key Management Document

F.1. Key Management Description

The description will provide the following information for all keys in the key chain:

- The purpose of the key
- If the key is stored in nonvolatile memory
- How and when the key is protected
- How and when the key is derived
- The strength of the key
- When or if the key would be no longer needed, along with a justification
- How and when the key may be shared
- Key destruction description

The description will also describe the following topics:

- A description of all authorization factors that are supported by the product and how each factor is handled, including any conditioning and combining performed.
- If validation is implemented, the process for validation shall be described, noting what value is used for validation and the process used to perform the validation. It shall describe how this process ensures no keys in the key chain are weakened or exposed by this process.
- The authorization process that leads to the decryption of the BEV or DEK. This section shall detail the key chain used by the product. It shall describe which keys are used in the protection of the BEV or DEK and how they meet the encryption or derivation requirements including the direct chain from the initial authorization to the BEV or DEK. It shall also include any values that add into that key chain or interact with the key chain and the protections that ensure those values do not weaken or expose the overall strength of the key chain.
- The diagram and essay will clearly illustrate the key hierarchy to ensure that at no point the chain could be broken without a cryptographic exhaust or all of the initial authorization values and the effective strength of the BEV or DEK is maintained throughout the key chain.
- A description of the data encryption engine, its components, and details about its implementation (e.g. initialization of the product, drivers, libraries (if applicable), logical interfaces for encryption/decryption, and how resources to be encrypted are identified). The description should also include the data flow from the device's host interface to the device's persistent media storing the data, information on those conditions in which the data bypasses the data encryption engine. The description should be detailed enough to verify all platforms ensure that when the user enables encryption, the product encrypts all selected resources.
- The process for destroying keys when they are no longer needed by describing the storage location of all keys and the protection of all keys stored in nonvolatile memory.

F.2. Key Management Diagram:

- The diagram will include all keys from the initial authorization factor(s) to the BEV or DEK and any keys or values that contribute into the chain. It must list the cryptographic strength of each key and indicate how each key along the chain is protected with either options from key chaining requirement. The diagram should indicate the input used to derive or decrypt each key in the chain.
- A functional (block) diagram showing the main components (such as memories and processors) the initial steps needed for the activities the TOE performs to ensure it encrypts the targeted resources when a user or administrator first provisions the product.

Appendix G: Glossary

For the purpose of this cPP, the following terms and definitions given in *some specific references* apply. If the same terms and definitions are given in those references, terms and definitions that fit the context of this cPP take precedence.

Address Book

Electronic storage mechanism that equates names of persons or physical locations with machine-usable destinations (e.g., fax telephone numbers, email addresses, Uniform Resource Locators).

Administrator

A User who has been specifically granted the authority to manage some portion or all of the TOE and whose actions may affect the security policies of the TOE. Administrators may possess special privileges that provide capabilities to override portions of security policies. [2600.1]

Asset

Entities that the owner of the TOE presumably places value upon. [CC]

Assumption

Physical, technical, and administrative conditions or requirements of the Operational Environment that must be upheld in order for the TOE to provide security functionality.

Block Erase

A vendor specific method of erasing units of storage in solid state storage devices, which may include areas inaccessible by the host computer or user.

Border Encryption Value

A secret value passed to a storage encryption component such as a self-encrypting storage device.

cPP

collaborative Protection Profile

CBC

Cipher Block Chaining

CEM

Common Methodology for Information Security Evaluation

CNSSP

Committee on National Security Systems Policy

Commercial Off-The-Shelf

Products that are both commercial and sold in substantial quantities in the commercial marketplace, and that can be procured or utilized under government contract in the same precise form as available to the general public. [FAR]

Conditionally Mandatory Uses

One of the uses described in [Section 1.4.2, “USE CASE 2: Conditionally Mandatory Use Cases”](#) which, if present in the TOE, must be included in its evaluated configuration.

Confidential (TSF) Data

Assets for which either disclosure or alteration by a User who is not an Administrator or the owner of the data would have an effect on the operational security of the TOE. [2600.1]

Create

Assigning a value or content to data in a storage device. Note that in the case of document processing jobs, the outcome is that the job is initiated

Credentials

A form of authentication data that specifies basic identifying information about a User or application. Credentials may be bound in some way to the individual to whom they were issued, or they may be bearer Credentials. The former are necessary for identification, while the latter may be acceptable for some forms of authorization. [2600]

Decommission

The act of retiring an HCD from active use in the Operational Environment. It may also involve a change in geographic location and/or ownership.

DEK

Data Encryption Key

Delete

Dereferencing or otherwise making unavailable data in a storage device. Note that in the case of document processing jobs, the outcome is that the job is terminated.

Document

A medium and the information recorded on it that generally has permanence and can be read by a person or a machine. [610.12]

Document Processing

Printing, scanning, or copying a Document.

Document Processing Job

A User request to the TOE to perform a Document Processing operation on a Document.

DSA

Digital Signature Algorithm

ECDSA

Elliptic Curve Digital Signature Algorithm

External Authentication

Identification and authentication mechanism that uses services of External IT Entities to authenticate TOE Users.

External IT Entity

An External Entity that is an IT device (not a human). [CC] defines “External Entity”

FEK

File Encryption Key

FIPS

Federal Information Processing Standards

GCM

Galois/Counter Mode

Hardcopy Device

A system producing or utilizing a physical embodiment of an electronic document or image. These systems include printers, scanners, fax machines, digital copiers, MFPs (multifunction peripherals), MFDs (multifunction devices), “all-in-ones” and other similar products. [2600]

HMAC

Keyed-hash message authentication code

HTTPS

Hypertext Transfer Protocol Secure

Immutable

Unchangeable. In the context of this document, this refers only to the inability to make changes in the field through manufacturer intended mechanisms and/or defined interfaces. Note that a platform or device manufacturer may still be able to make changes through manufacturing or service tools directly connected to a locally (physically) present platform or device.

Intermediate Key

A key used in a point between the initial user authorization and the DEK. [CPP_FDE_EE_V2.0]

Internal Authentication

Identification and authentication function that is wholly contained within the TOE.

IPsec

IP security

iTC

international Technical Community

Job

A document processing task submitted to the hardcopy device. A single processing task may process one or more documents. [2600.1]

Job Owner

A User who has permission to control a Job and access its documents. Typically, such permissions are obtained by submitting a Job, by access control mechanism, or by obtaining a

credential associated with a Job.

KDF

Key Derivation Functions

Leaf Key

An encryption key that is wrapped by either a root key or intermediate key. In an HCD the Leaf Key commonly acts as a DEK.

Local Area Network

A non-public data network in which serial transmission is used without store and forward techniques for direct data communication among data stations located on the User's premises. [8802-6]

Local User

A User who is physically interacting with the HCD.

Modify

Changing the value / content of data in a storage device. Note that in the case of document processing jobs, the outcome is that the instructions or other parameters of the job are changed.

Multifunction Device

A Hardcopy Device that fulfills multiple purposes by using multiple functions in different combinations to replace several, single function devices. [Also known as Multifunction Printer and Multifunction Peripheral] [2600]

NAT

Network address translation

Network Printing

Printing operation that has been initiated by a Network User.

Network User

A User who interacts with the HCD over a network.

NIST

National Institute of Standards and Technology

Nonvolatile Storage Device

A device that provides computer storage of data that is not cleared when the power is turned off.

Normal User

A User who is authorized to perform functions that process User Document Data in the TOE.

NTP

Network Time Protocol

Operational Environment

Environment in which the TOE is operated. [CC]

Optional Use

One of the uses described in [Section 1.4.3, “USE CASE 3: Optional Use Cases”](#) which may be present in the TOE, and may optionally be included in its evaluated configuration.

Organizational Security Policy

Set of security rules, procedures, or guidelines for an organization. [CC]

Output Tray

A receptacle for the TOE’s printed output.

Protected (TSF) Data

Assets for which alteration by a User who is not an Administrator or the owner of the data would have an effect on the operational security of the TOE, but for which disclosure is acceptable. [2600.1]

Protection Profile

Implementation-independent statement of security needs for a TOE type. [CC]

Read

To access data from a storage device or data medium. (Note that in this case, the data medium may be a printed output, and therefore, release of a print job is a “read” operation) [610.12]

Redeploy

The act of moving an HCD from one Operational Environment to another Operational Environment.

Required Use

One of the uses described in [Section 1.4.1, “USE CASE 1: Required Use Cases”](#) which must be present in the TOE in its evaluated configuration.

RFC

Request for Comments

RNG

Random Number Generator

Root of Trust

Highly reliable hardware, firmware, and software components that perform specific, critical security functions. Because roots of trust are inherently trusted, they must be secure by design. Roots of trust provide a firm foundation from which to build security and trust.

RSA

Rivest–Shamir–Adleman

Security Assurance Requirement

A description of how assurance is to be gained that the TOE meets the SFRs. [CC]

Security Functional Requirement

A translation of the Security Objectives for the TOE into a standardized language. [CC]

Security Objective

Statement of an intent to counter identified Threats and/or satisfy identified organization security policies and/or Assumptions. [CC]

Security Target

Implementation-dependent statement of security needs for a specific identified TOE. [CC]

SED

Self Encrypting Drive

Servicing

Performing repairs or preventative maintenance on the HCD.

SPD

Security Problem Definition

SSH

Secure Shell

ST

Security Target

Standard Protection Profile

A Protection Profile that is developed according to processes defined by NIAP.

Submask

A submask is a bit string that can be generated and stored in a numbers of ways, such as passphrases, tokens, etc. [CPP_FDE_EE_V2.0]

Target of Evaluation

Set of software, firmware and/or hardware possibly accompanied by guidance. [CC]

Temporary Storage

Storage of data that is not intentionally retained by the TOE after the completion of a Document Processing Job.

Threat

Capabilities, intentions, and attack methods of adversaries, or any circumstance or event, with the potential to violate the TOE security policy. [2600.1]

TLS

Transport Layer Security

TOE Owner

A person or organizational entity responsible for protecting TOE Assets and establishing related security policies. [2600.1]

TOE Security Functionality

Combined functionality of all hardware, software, and firmware of a TOE that must be relied upon for the correct enforcement of the SFRs. [CC]

TPM

Trusted Platform Module

TSF Data

Data for the operation of the TOE upon which the enforcement of the SFR relies. [CC]

TSF interface

Means by which external entities (or subjects in the TOE but outside of the TSF) supply data to the TSF, receive data from the TSF and invoke services from the TSF [CC]

TSS

TOE Summary Specification

Unauthorized Access

Access to a resource that a User is not permitted to access.

User

Human or IT entity possibly interacting with the TOE from outside of the TOE boundary. [CC]

User Data

Data for the User that does not affect the operation of the TSF. [CC]

User Document Data

The Asset that consists of the information contained in a User's Document. This includes the original Document itself in either hardcopy or electronic form, image data, or residually stored data created by the hardcopy device while processing an original Document and printed hardcopy output [2600.1]

User Job Data

The Asset that consists of the information about a User's Document or job to be processed by the TOE. [2600.1]

XTS

XEX-based tweaked-codebook mode with ciphertext stealing

Sources:

[2600] IEEE Std. 2600™-2008 "IEEE Standard for Information Technology: Hardcopy Device and System Security"

[2600.1] IEEE Std. 2600.1™-2009 "IEEE Standard for a Protection Profile in Operational Environment"

A”

[610.12] IEEE Std 610.12-1990 “IEEE Standard Glossary of Software Engineering Terminology”

[8802-6] ISO /IEC 8802-6:1994 “Information technology – Telecommunications and information exchange between systems – Local and metropolitan area networks – Specific requirements – Part 6”

[CC] ISO/IEC 15408-1:2009 "Information technology – Security techniques – Evaluation criteria for IT security – Part 1"

[CPP_FDE_EE_V2.0] collaborative Protection Profile for Full Drive Encryption – Encryption Engine, Version 2.0, September 09, 2016

[FAR] United States Federal Acquisition Regulations

[IEEE] IEEE Standards Dictionary (ISBN 973-0-7381-2601-2)

Appendix H: Acronyms

Table 9. Acronyms

Acronym	Meaning
AES	Advanced Encryption Standard
ITSEF	IT Security Evaluation Facility
BEV	Border Encryption Value
CBC	Cipher Block Chaining
CC	Common Criteria
CCEVS	Common Criteria Evaluation and Validation Service
CEM	Common Methodology for Information Security Evaluation
CNSSP	Committee on National Security Systems Policy
COTS	Commercial Off-The-Shelf
cPP	collaborative Protection Profile
DEK	Data Encryption Key
DSA	Digital Signature Algorithm
EAL	Evaluation Assurance Level
ECDSA	Elliptic Curve Digital Signature Algorithm
FEK	File Encryption Key
FIPS	Federal Information Processing Standards
GCM	Galois/Counter Mode
HCD	Hardcopy Device
HMAC	keyed-hash message authentication code
HTTPS	Hypertext Transfer Protocol Secure
IPA	Information-technology Promotion Agency
I&A	Identification and Authentication
IPsec	IP security
IT	Information Technology
ITC	international Technical Community
JISEC	Japan Information technology Security Evaluation and Certification scheme
KDF	Key Derivation Function
KMD	Key Management Description
LAN	Local Area Network
LDAP	Lightweight Directory Access Protocol
MFD	Multifunction Device

Acronym	Meaning
MFP	Multifunction Printer, Multifunction Peripheral
NAT	Network address translation
NIAP	National Information Assurance Partnership
NIST	National Institute of Standards and Technology
NTP	Network Time Protocol
OCSP	Online Certificate Status Protocol
OSP	Organizational Security Policy
PP	Protection Profile
PSTN	Public Switched Telephone Network
RBG	Random Bit Generator
RFC	Request for Comments
RNG	Random Number Generator
RSA	Rivest–Shamir–Adleman
SAR	Security Assurance Requirement
SED	Self Encrypting Drive
SFP	Security Functional Policy
SFR	Security Functional Requirement
SPD	Security Problem Definition
SPP	Standard Protection Profile
SSH	Secure Shell
ST	Security Target
TLS	Transport Layer Security
TOE	Target of Evaluation
TPM	Trusted Platform Module
TSF	TOE Security Functionality
TSFI	TSF Interface
TSS	TOE Summary Specification
XTS	XEX-based tweaked-codebook mode with ciphertext stealing

Appendix I: Definitions and Rationale Tables

I.1. User Definitions

There are two categories of Users defined in this cPP:

Table 10. User Categories

Designation	Category Name	Definition
U.NORMAL	Normal User	A User who has been identified and authenticated and does not have an administrative role. A Normal User can be a Local User or a Network User as described in Section 1.3.2, “Operational Environment”
U.ADMIN	Administrator	A User who has been identified and authenticated and has an administrative role

A conforming TOE may define additional roles, sub-roles, or groups. In particular, a conforming TOE may define several administrative roles that have authority to administer different aspects of the TOE.

I.2. Asset Definitions

Assets are passive entities in the TOE that contain or receive information. In this cPP, Assets are Objects (as defined by the CC). There are two categories of Assets defined in this cPP:

Table 11. Asset Categories

Designation	Asset Category	Definition
D.USER	User Data	Data created by and for Users that do not affect the operation of the TSF
D.TSF	TSF Data	Data created by and for the TOE that might affect the operation of the TSF

A conforming TOE may define additional Asset categories.

I.2.1. User Data

User Data are composed of two types:

Table 12. User Data types

Designation	User Data type	Definition
D.USER.DOC	User Document Data	Information contained in a User’s Document, in electronic or hardcopy form

Designation	User Data type	Definition
D.USER.JOB	User Job Data	Information related to a User's Document or Document Processing Job

A conforming TOE may define additional types of User Data.

I.2.2. TSF Data

TSF Data are composed of two types:

Table 13. TSF Data types

Designation	TSF Data type	Definition
D.TSF.PROT	Protected TSF Data	TSF Data for which alteration by a User who is neither the data owner nor in an Administrator role might affect the security of the TOE, but for which disclosure is acceptable
D.TSF.CONF	Confidential TSF Data	TSF Data for which either disclosure or alteration by a User who is neither the data owner nor in an Administrator role might affect the security of the TOE

A conforming TOE may define additional types of TSF Data, examples include:

Table 14. Examples of TSF Data Categorization

Examples of Protected TSF Data	Examples of Confidential TSF Data
User and Administrator identification data	User and Administrator authentication data
Scan/fax/e-mail destination lists or address books	Credentials for accessing external devices (e.g., e-mail or file servers)
Job status logs	Job details and audit logs
Status of pending or stored jobs and documents	Access control lists
Device and network status information and configuration settings	Device and network management (e.g., Simple Network Management Protocol) authentication data
Device security status	Cryptographic keys
Device firmware and software	

I.3. Threat Definitions

Threats are defined by a threat agent that performs an action resulting in an outcome that has the potential to violate TOE security policies.

Table 15. Threats

Designation	Definition
T.UNAUTHORIZED_ACCESS	An attacker may access (read, modify, or delete) User Document Data or change (modify or delete) User Job Data in the TOE through one of the TOE's interfaces or the physical Nonvolatile Storage component.
T.TSF_COMPROMISE	An attacker may gain Unauthorized Access to TSF Data in the TOE through one of the TOE's interfaces or the physical Nonvolatile Storage component.
T.TSF_FAILURE	A malfunction of the TSF may compromise the device security status if the TOE is permitted to operate.
T.UNAUTHORIZED_UPDATE	An attacker may install unauthorized firmware/software on the TOE to modify the Device security status.
T.NET_COMPROMISE	An attacker may access data in transit or otherwise compromise the security of the TOE by monitoring or manipulating network communication.
T.WEAK_CRYPTO	An attacker may exploit poorly chosen cryptographic algorithms, random bit generators, ciphers or key sizes to access (read, modify, or delete) TSF and User data.

I.4. Organizational Security Policy Definitions

Organizational Security Policies are used to provide a basis for Security Objectives that are not practical to define on the basis of Threats to Assets or that originate primarily from customer expectations.

Table 16. Organizational Security Policies

Designation	Definition
P.AUTHORIZATION	Users must be authorized before performing Document Processing and administrative functions.
P.AUDIT	Security-relevant activities must be audited and the log of such actions must be stored within the TOE as well as protected and transmitted to an External IT Entity.
P.COMMS_PROTECTION	The TOE must be able to identify itself to other devices on the LAN.
P.STORAGE_ENCRYPTION	If the TOE stores User Document Data or Confidential TSF Data on Nonvolatile Storage Devices, it will encrypt such data on those devices.
P.KEY_MATERIAL	Cleartext keys, submasks, random numbers, or any other values that contribute to the creation of encryption keys for Nonvolatile Storage of User Document Data or Confidential TSF Data must be protected from unauthorized access and must not be stored on that storage device.
P.FAX_FLOW (conditionally mandatory)	If the TOE provides a PSTN fax function, it will ensure separation between the PSTN fax line and the LAN.

Designation	Definition
P.IMAGE_OVERWRITE (optional)	Upon completion or cancellation of a Document Processing job, the TOE shall overwrite residual image data from its Nonvolatile Storage Devices.
P.WIPE_DATA (optional)	The TOE shall provide a function that an authorized administrator can invoke to make all customer-supplied User Data and TSF Data permanently irretrievable from Nonvolatile Storage Devices.
P.ROT_INTEGRITY	The vendor provides a Root of Trust (RoT) that is comprised of the TOE firmware, hardware, and pre-installed public keys or required critical security parameters.

I.5. Assumption Definitions

Assumptions are conditions that must be satisfied in order for the Security Objectives and functional requirements to be effective.

Table 17. Assumptions

Designation	Definition
A.PHYSICAL	Physical security, commensurate with the value of the TOE and the data it stores or processes, is assumed to be provided by the environment.
A.NETWORK	The Operational Environment is assumed to protect the TOE from direct, public access to its LAN interface.
A.TRUSTED_ADMIN	TOE Administrators are trusted to administer the TOE according to site security policies.
A.TRAINED_USERS	Authorized Users are trained to use the TOE according to site security policies.

I.6. Definitions of Security Objectives for the TOE

Table 18. Security Objectives for the TOE

Designation	Definition
O.USER_I&A	The TOE shall perform identification and authentication of Users for operations that require access control, User authorization, or Administrator roles.
O.ACCESS_CONTROL	The TOE shall enforce access controls to protect User Data and TSF Data in accordance with security policies.
O.USER_AUTHORIZATION	The TOE shall perform authorization of Users in accordance with security policies.
O.ADMIN_ROLES	The TOE shall ensure that only authorized Administrators are permitted to perform administrator functions.
O.UPDATE_VERIFICATION	The TOE shall provide mechanisms to verify the authenticity of firmware/software updates.

Designation	Definition
O.TSF_SELF_TEST	The TOE shall test some subset of its security functionality to help ensure that subset is operating properly.
O.COMMS_PROTECTION	The TOE shall have the capability to protect LAN communications of User Data and TSF Data from Unauthorized Access, replay, and source/destination spoofing.
O.AUDIT	The TOE shall generate audit data and store it internally as well as be capable of sending it to a trusted External IT Entity.
O.STORAGE_ENCRYPTION	If the TOE stores User Document Data or Confidential TSF Data in Nonvolatile Storage devices, then the TOE shall encrypt such data on those devices.
O.KEY_MATERIAL	The TOE shall protect from unauthorized access any cleartext keys, submasks, random numbers, or other values that contribute to the creation of encryption keys for storage of User Document Data or Confidential TSF Data in Nonvolatile Storage Devices; The TOE shall ensure that such key material is not stored in cleartext on the storage device that uses that material.
O.FAX_NET_SEPARATION (conditionally mandatory)	If the TOE provides a PSTN fax function, then the TOE shall ensure separation of the PSTN fax telephone line and the LAN, by system design or active security function.
O.IMAGE_OVERWRITE (optional)	Upon completion or cancellation of a Document Processing job, the TOE shall overwrite residual image data from its Nonvolatile Storage Devices.
O.WIPE_DATA (optional)	The TOE provides a function that an authorized administrator can invoke to make all customer-supplied User Data and TSF Data permanently irretrievable from Nonvolatile Storage Devices.
O.AUTH_FAILURES (conditionally mandatory)	The TOE resists repeated attempts to guess authorization data by responding to consecutive failed attempts in a way that prevents an attacker from exploring a significant amount of the space of possible authorization data values.
O.FW_INTEGRITY	The TOE ensures its own integrity has remained intact and attests its integrity to outside parties on request.
O.STRONG_CRYPTO	The TOE implements strong cryptographic mechanisms and algorithms according to recognized standards, including support for random bit generation based on recognized standards and a source of sufficient entropy. The TOE uses key sizes that are recognized as providing sufficient resistance to current attack capabilities.

I.7. Definitions of Security Objectives for the Operational Environment

Table 19. Security Objectives for the Operational Environment

Designation	Definition
OE.PHYSICAL_PROTECTION	The Operational Environment shall provide physical security, commensurate with the value of the TOE and the data it stores or processes.
OE.NETWORK_PROTECTION	The Operational Environment shall provide network security to protect the TOE from direct, public access to its LAN interface.
OE.ADMIN_TRUST	The TOE Owner shall establish trust that Administrators will not use their privileges for malicious purposes.
OE.USER_TRAINING	The TOE Owner shall ensure that Users are aware of site security policies and have the competence to follow them.
OE.ADMIN_TRAINING	The TOE Owner shall ensure that Administrators are aware of site security policies and have the competence to use manufacturer's guidance to correctly configure the TOE and protect passwords and keys accordingly.

I.8. Security Objectives Tables

Table 20. Security Objectives rationale

Threat/Policy/Assumption	Rationale
T.UNAUTHORIZED_ACCESS An attacker may access (read, modify, or delete) User Document Data or change (modify or delete) User Job Data in the TOE through one of the TOE's interfaces.	O.ACCESS_CONTROL restricts access to User Data in the TOE to authorized Users. O.USER_I&A provides the basis for access control. O.ADMIN_ROLES restricts the ability to authorize Users and set access controls to authorized Administrators. O.AUTH_FAILURES resists repeated attempts to guess authorization data by responding to consecutive failed attempts in a way that prevents an attacker from exploring a significant amount of the space of possible authorization data values.
T.TSF_COMPROMISE An attacker may gain Unauthorized Access to TSF Data in the TOE through one of the TOE's interfaces.	O.ACCESS_CONTROL restricts access to TSF Data in the TOE to authorized Users. O.USER_I&A provides the basis for access control. O.ADMIN_ROLES restricts the ability to authorize Users and set access controls to authorized Administrators.
T.TSF_FAILURE A malfunction of the TSF may cause loss of security if the TOE is permitted to operate.	O.TSF_SELF_TEST prevents the TOE from operating if a malfunction is detected.
T.WEAK_CRYPTO An attacker may exploit poorly chosen cryptographic algorithms, random bit generators, ciphers or key sizes.	O.STRONG_CRYPTO implements strong cryptographic mechanisms to provide sufficient resistance to current attack capabilities.

Threat/Policy/Assumption	Rationale
T.UNAUTHORIZED_UPDATE An attacker may cause the installation of unauthorized firmware/software on the TOE.	O.UPDATE_VERIFICATION verifies the authenticity of firmware/software updates.
T.NET_COMPROMISE An attacker may access data in transit or otherwise compromise the security of the TOE by monitoring or manipulating network communication.	O.COMMS_PROTECTION protects LAN communications from sniffing, replay, and man-in-the-middle attacks.
P.AUTHORIZATION Users must be authorized before performing Document Processing and administrative functions.	O.USER_AUTHORIZATION restricts the ability to perform Document Processing and administrative functions to authorized Users. O.USER_I&A provides the basis for authorization. O.ADMIN_ROLES restricts the ability to authorize Users to authorized Administrators.
P.AUDIT Security-relevant activities must be audited and the log of such actions must be protected and transmitted to an External IT Entity.	O.AUDIT requires the generation of audit data. O.ACCESS_CONTROL restricts access to audit data in the TOE to authorized Users. O.USER_AUTHORIZATION provides the basis for authorization.
P.COMMS_PROTECTION The TOE must be able to identify itself to other devices on the LAN.	O.COMMS_PROTECTION protects LAN communications from man-in-the-middle attacks.
P.STORAGE_ENCRYPTION If the TOE stores User Document Data or Confidential TSF Data on Nonvolatile Storage Devices, it will encrypt such data on those devices and the TOE shall provide a function that an authorized administrator may destroy encryption keys or keying material when the TOE is removed from its Operational Environment or its ownership is changed.	O.STORAGE_ENCRYPTION protects User Document Data and Confidential TSF Data stored in Nonvolatile Storage Devices from exposure if a device has been removed from the TOE and its Operational Environment.

Threat/Policy/Assumption	Rationale
P.KEY_MATERIAL Cleartext keys, submasks, random numbers, or any other values that contribute to the creation of encryption keys for Nonvolatile Storage of User Document Data or Confidential TSF Data must be protected from unauthorized access and must not be stored on that storage device.	O.KEY_MATERIAL protects keys and key materials from unauthorized access and ensures that any key materials are not stored in cleartext on the device that uses those materials for its own encryption.
P.FAX_FLOW (conditionally mandatory) If the TOE provides a PSTN fax function, it will ensure separation between the PSTN fax line and the LAN.	O.FAX_NET_SEPARATION requires a separation between the PSTN fax line and the LAN.
P.IMAGE_OVERWRITE (optional) Upon completion or cancellation of a Document Processing job, the TOE shall overwrite residual image data from its Nonvolatile Storage Device.	O.IMAGE_OVERWRITE overwrites residual image data from Nonvolatile Storage Devices after Document Processing jobs are completed or cancelled.
P.WIPE_DATA (optional) The TOE shall provide a function that an authorized administrator can invoke to make all customer-supplied User Data and TSF Data permanently irretrievable from Nonvolatile Storage Devices.	O.WIPE_DATA provides a function that makes all customer-supplied User Data and TSF Data permanently irretrievable from Nonvolatile Storage Devices when invoked by an authorized administrator.
P.ROT_INTEGRITY The vendor provides a Root of Trust (RoT) that is comprised of the TOE firmware, hardware, and pre-installed public keys or required critical security parameters.	O.FW_INTEGRITY ensures that the TOE's own integrity remains intact and can attest its integrity to outside parties on request.

Threat/Policy/Assumption	Rationale
A.PHYSICAL Physical security, commensurate with the value of the TOE and the data it stores or processes, is assumed to be provided by the environment.	OE.PHYSICAL_PROTECTION establishes a protected physical environment for the TOE.
A.NETWORK The Operational Environment is assumed to protect the TOE from direct, public access to its LAN interface.	OE.NETWORK_PROTECTION establishes a protected LAN environment for the TOE.
A.TRUSTED_ADMIN TOE Administrators are trusted to administer the TOE according to site security policies.	OE.ADMIN_TRUST establishes responsibility of the TOE Owner to have a trusted relationship with Administrators.
A.TRAINED_USERS Authorized Users are trained to use the TOE according to site security policies.	OE.ADMIN_TRAINING establishes responsibility of the TOE Owner to provide appropriate training for Administrators. OE.USER_TRAINING establishes responsibility of the TOE Owner to provide appropriate training for Users.

I.9. TOE Security Functional Requirements Rationale

Table 21. TOE Security Functional Requirements Rationale

Objective	Addressed by	Rationale
O.USER_AUTHORIZATION	FDP_ACC.1	This requirement defines an access control policy that governs the authorization required to interact with user data.
	FDP_ACF.1	This requirement defines the rules enforced by the access control policy defined in FDP_ACC.1 to control access to user data.
	FIA_ATD.1	This requirement defines the list of security attributes belonging to individual users that supports user authentication.
	FMT_MSA.1	This requirement enforces restrictions on the subjects that can interact with user data and their security attributes.
	FMT_MSA.3	This requirement defines the default access restrictions that are enforced on user data security attributes if not overridden by specific access control policy rules.
	FMT_SMF.1	This requirement defines the management functions that are provided by the TOE to authorized users.

Objective	Addressed by	Rationale
	FMT_SMR.1	This requirement defines the different security-related roles that the TOE recognizes.
O.USER_I&A	FIA_AFL.1	This requirement defines how many consecutive unsuccessful authentication failures to prove a user's identity trigger actions by the TOE and what those actions will be.
	FIA_PMG_EX T.1	This requirement defines the rules for passwords used by users for purposes of proving their identity to the TOE at the TOE itself.
	FIA_UAU.1	This requirement defines the allowed actions that can be performed on behalf of a user before the user is authenticated and requires users to be authenticated before security functions by the TOE can be performed.
	FIA_UAU.7	This requirement defines what type of feedback to the user is to be provided while authentication is in progress.
	FIA_UID.1	This requirement defines what actions users can perform before being identified by the TOE.
	FIA_USB.1	This requirement defines the rules governing the association of the user's security attributes to a subject acting on the user's behalf.
	FTA_SSL.3	This requirement enforces that the TOE terminates an interactive user session after a defined period of inactivity.
O.ACCESS_C ONTROL	FDP_ACC.1	This requirement defines an access control policy that governs the authorization required to interact with user data.
	FDP_ACF.1	This requirement defines the rules enforced by the access control policy defined in FDP_ACC.1 to control access to user data.
	FMT_MSA.1	This requirement enforces restrictions on the subjects that can interact with user data and their security attributes.
	FMT_MSA.3	This requirement defines the default access restrictions that are enforced on user data security attributes if not overridden by specific access control policy rules.
	FMT_MTD.1	This requirement defines the roles that can perform specified operations on TSF data.
	FMT_SMF.1	This requirement defines the management functions that are provided by the TOE to authorized users.
	FMT_SMR.1	This requirement defines the different security-related roles that the TOE recognizes.
O.ADMIN_R OLES	FIA_UID.1	This requirement defines what admin actions users can perform before being identified by the TSF.
	FMT_MOF.1	This requirement enforces access control on the admin functions provided by the TOE.

Objective	Addressed by	Rationale
	FMT_SMF.1	This requirement defines the management functions that are provided by the TOE to authorized users.
	FMT_SMR.1	This requirement defines the different security-related roles that the TOE recognizes.
O.UPDATE_VERIFICATION	FCS_COP.1/SigGen	This requirement defines the cryptographic algorithms that must be applied to generate digital signatures that are used to verify the integrity of software/firmware upgrade files for the TOE.
	FCS_COP.1/Hash	This requirement defines the cryptographic algorithms that must be applied to generate cryptographic hash values that are used to verify the integrity of software/firmware upgrade files for the TOE.
	FPT_TUD_EXT.1	This requirement defines the ability of the admin to initiate and verify firmware/software updates to the TOE.
O.TSF_SELF_TEST	FPT_TST_EXT.1	This requirement enforces the use of self-tests during initial start-up (and power on) to demonstrate the correct operation of the TOE.
O.COMMS_PROTECTION	FCS_CKM.1/SKG	This requirement generates the symmetric keys needed to encrypt data being transmitted to/from the TOE.
	FCS_CKM.2	This requirement provides the methods for performing key establishment between the TOE and IT entity that data is to be transferred either to the TOE or from the TOE.
	FCS_CKM.6	This requirement enforces that all plaintext secret and private cryptographic keys and cryptographic critical security parameters must be destroyed, and the method used, when no longer needed.
	FCS_COP.1/DataEncryption	This requirement defines the cryptographic algorithms that must be applied to encrypt/decrypt data that is to be transmitted to/from the TOE.
	FCS_COP.1/SigGen	This requirement defines the cryptographic algorithms that must be applied to generate digital signatures that help to verify the integrity of data transmitted to/from the TOE.
	FCS_COP.1/Hash	This requirement ensures the use of strong hash mechanisms.
	FCS_RBG_EXT.1	This requirement defines the random bit generation mechanisms that must be applied to generate cryptographic keys and cryptographic critical security parameters.
	FPT_SKP_EXT.1	This requirement enforces the prevention of reading all pre-shared keys, symmetric keys, and private keys.
	FTP_ITC.1	This requirement provides for a trusted communications channel to transmit the user and TSF data between the TOE and a trusted external IT entity.

Objective	Addressed by	Rationale
	FTP_TRP.1/Admin	This requirement provides for a trusted communications path between the TOE and the admin
	FCS_IPSEC_EXT.1	This requirement defines the IPsec protocol for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_TLSC_EXT.1	This requirement defines the TLS protocol acting as a client without mutual authentication for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_TLSS_EXT.1	This requirement defines the TLS protocol acting as a server without mutual authentication for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_SSHC_EXT.1	This requirement defines the SSH protocol acting as a client for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_SSHS_EXT.1	This requirement defines the SSH protocol acting as a server for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_HTTPS_EXT.1	This requirement defines the TLS/HTTPS protocol for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_COP.1/KeyEncap	This requirement defines the use of a strong method for key encapsulation.
	FCS_COP.1/KeyedHash	This requirement defines the cryptographic algorithms that must be applied to perform keyed-hash message authentication.
	FIA_PSK_EXT.1	This requirement defines the components of pre-shared keys for the IPsec protocol.
	FCS_DTLSC_EXT.1	This requirement defines the DTLS protocol acting as a client without mutual authentication for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_DTLSS_EXT.1	This requirement defines the DTLS protocol acting as a server without mutual authentication for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FIA_X509_EXT.1	This requirement defines the rules for the validation of X.509 certificates.
	FIA_X509_EXT.2	This requirement defines the use of X.509 certificates for authentication of the protocols used for secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FIA_X509_EXT.3	This requirement defines the rules for a certificate request for an X.509 certificate.

Objective	Addressed by	Rationale
	FCS_CKM.1/A KG	This requirement defines the cryptographic algorithms that must be applied to generate asymmetric cryptographic keys.
	FTP_TRP.1/N onAdmin	This requirement provides for a trusted communications path between the TOE and a user who is not an admin.
	FCS_DTLSC_EXT.2	This requirement defines the DTLS protocol acting as a client with mutual authentication for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_DTLSS_EXT.2	This requirement defines the DTLS protocol acting as a server with mutual authentication for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_TLSC_EXT.2	This requirement defines the TLS protocol acting as a client with mutual authentication for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
	FCS_TLSS_EXT.2	This requirement defines the TLS protocol acting as a server with mutual authentication for the secure transmission of user and TSF data between the TOE and a trusted external IT entity.
O.AUDIT	FAU_GEN.1	This requirement defines the minimum required auditable events and the required contents of the audit data.
	FAU_GEN.2	This requirement enforces associating each auditable event with the identity of the user that caused the event.
	FAU_SAR.1	This requirement provides for the reading of audit data in an interpretable manner.
	FAU_SAR.2	This requirement enforces only allowing users with explicit read-access to read audit data.
	FAU_STG.1	This requirement provides for the storage of audit log data on the TOE itself or to a trusted external IT entity over a trusted communications channel.
	FAU_STG.2	This requirement enforces protection of stored audit data from unauthorized deletion or modification.
	FAU_STG.5	This requirement defines actions to be taken when the audit trail is full.
	FPT_STM.1	This requirement provides reliable system time services that are used to provide time stamps on audit log data.
	FTP_ITC.1	This requirement provides for a trusted communications channel to transmit the audit log data between the TOE and a trusted external IT entity.
O.STORAGE _ENCRYPTION	FCS_CKM.1/S KG	This requirement generates the symmetric keys needed to encrypt data being stored on the TOE.

Objective	Addressed by	Rationale
	FCS_CKM.6	This requirement enforces that all plaintext secret and private cryptographic keys and cryptographic critical security parameters must be destroyed, and the method used, when no longer needed.
	FCS_COP.1/Hash	This requirement defines the cryptographic algorithms that must be applied to generate cryptographic hash values that are used verify the integrity of user and TSF data stored on the TOE.
	FCS_RBG_EX T.1	This requirement defines the random bit generation mechanisms that must be applied to generate cryptographic keys and cryptographic critical security parameters used to protect the confidentiality and integrity of user and TSF data stored on the TOE.
	FCS_COP.1/StorageEncryption	This requirement defines the cryptographic algorithms that must be applied to encrypt/decrypt user and TSF data stored on the TOE.
	FCS_COP.1/KeyWrap	This requirement defines the cryptographic algorithms that must be applied to perform key wrapping of a cryptographic key in support of key chaining.
	FCS_COP.1/KeyEnc	This requirement defines the cryptographic algorithms that must be applied to perform key encryption and decryption.
	FCS_COP.1/KeyTransport	This requirement defines the cryptographic algorithms that must be applied to transfer a key and other keying material from an entity that either owns the key or generates the key to another entity that is intended to use the key.
	FCS_SMC_EX T.1	This requirement defines the methods for combining submasks to generate an intermediary key.
	FCS_CKM.5	This requirement defines the methods for generating an intermediary key.
	FCS_PCC_EX T.1	This requirement defines the cryptographic algorithms that must be applied to construct cryptographic passwords.
	FCS_COP.1/KeyedHash	This requirement defines the cryptographic algorithms that must be applied to perform keyed-hash message authentication.
	FCS_COP.1/C MAC	This requirement defines the cryptographic algorithms that must be applied to perform cipher-based message authentication.
	FCS_SNI_EXT .1	This requirement defines the creation and usage of salts and nonces.
	FCS_KYC_EX T.1	This requirement defines the rules for creating a key chain to unlock a self-encrypting drive.
	FDP_DSK_EX T.1	This requirement defines the rules for the protection of user and TSF data stored on the TOE.

Objective	Addressed by	Rationale
O.KEY_MATERIAL	FPT_KYP_EX T.1	This requirement defines the rules for the protection of cryptographic keys and key material.
O.FAX_NETWORK (conditionally mandatory)	FDP_FXS_EX T.1	This requirement enforces the prohibition of communication via the fax interface, except for transmitting or receiving User Data using fax protocols.
O.IMAGE_OVERWRITE (optional)	FDP_UDU_EX T.1	This requirement enforces the overwriting of user document data stored on the TOE after each job is processed or cancelled.
O.WIPE_DATA (optional)	FCS_CKM.6	This requirement enforces that all plaintext secret and private cryptographic keys and cryptographic critical security parameters must be destroyed, and the method used, when no longer needed.
	FPT_WIPE_EX T.1	This requirement enforces that customer-supplied user and TSF data is made unavailable at the request of the admin.
O.AUTH_FAILURES	FIA_AFL.1	This requirement defines how many consecutive unsuccessful authentication failures to prove a user's identity trigger actions by the TOE and what those actions will be.
O.FW_INTEGRITY	FPT_SBT_EX T.1	This requirement defines how the integrity of firmware/software at boot time is to be verified via chains of trust, each one anchored in its own root of trust.
	FCS_COP.1/Hash	This requirement ensures the use of strong hash mechanisms.
O.STRONG_CRYPTO	FCS_CKM.1/SKG	This requirement ensures the generation of strong symmetric keys.
	FCS_CKM.2	This requirement ensures the use of strong key establishment mechanisms.
	FCS_COP.1/DataEncryption	This requirement ensures the use of strong methods to perform data encryption/decryption.
	FCS_COP.1/SigGen	This requirement ensures the use of strong digital signature services.
	FCS_COP.1/Hash	This requirement ensures the use of strong hash mechanisms.
	FCS_RBG_EX T.1	This requirement ensures the use of strong random bit generation mechanisms.
	FPT_STM.1	This requirement provides reliable system time services that may be used as inputs to cryptographic functions.

Objective	Addressed by	Rationale
	FCS_COP.1/StorageEncryption	This requirement ensures the use of strong methods to perform data encryption/decryption.
	FCS_COP.1/KeyWrap	This requirement ensures the use of strong methods to perform key wrapping.
	FCS_COP.1/KeyEnc	This requirement ensures the use of strong methods to perform key encryption.
	FCS_COP.1/KeyTransport	This requirement ensures the use of strong methods to perform key transport.
	FCS_COP.1/KeyEncap	This requirement defines the use of a strong method for key encapsulation.
	FCS_SMC_EX T.1	This requirement ensures the use of strong methods to perform submask combining.
	FCS_IPSEC_EX T.1	This requirement defines the implementation of IPsec using strong cryptography.
	FCS_TLSC_EX T.1	This requirement defines the implementation of TLS acting as a client without mutual authentication using strong cryptography.
	FCS_TLSS_EX T.1	This requirement defines the implementation of TLS acting as a server without mutual authentication using strong cryptography.
	FCS_SSHC_EX T.1	This requirement defines the implementation of SSH acting as a client without mutual authentication using strong cryptography.
	FCS_SSHS_EX T.1	This requirement defines the implementation of SSH acting as a server without mutual authentication using strong cryptography.
	FCS_HTTPS_EX T.1	This requirement defines the implementation of TLS/HTTPS using strong cryptography.
	FCS_COP.1/KeyedHash	This requirement ensures the use of strong methods to perform keyed-hash message authentication.
	FCS_DTLSC_EX T.1	This requirement defines the implementation of DTLS acting as a client without mutual authentication using strong cryptography.
	FCS_DTLSS_EX T.1	This requirement defines the implementation of DTLS acting as a server without mutual authentication using strong cryptography.
	FCS_PCC_EX T.1	This requirement ensures the use of strong methods to generate cryptographic passwords.
	FCS_CKM.5	This requirement ensures the use of strong methods for performing cryptographic key derivation.
	FCS_COP.1/C MAC	This requirement ensures the use of strong methods to perform cipher-based message authentication.

Objective	Addressed by	Rationale
	FCS_SNI_EXT.1	This requirement ensures that salts and nonces used by the TOE do not negatively impact key strength.
	FCS_CKM.1/A KG	This requirement ensures the generation of strong asymmetric keys.
	FPT_KYP_EX T.1	This requirement ensures the use of strong methods to protection of key and key material.
	FCS_KYC_EX T.1	This requirement ensures the use of strong methods to perform key chaining.
	FCS_DTLSC_EXT.2	This requirement defines the implementation of DTLS acting as a client with mutual authentication using strong cryptography.
	FCS_DTLSS_EXT.2	This requirement defines the implementation of DTLS acting as a server with mutual authentication using strong cryptography.
	FCS_TLSC_EX T.2	This requirement defines the implementation of TLS acting as a client with mutual authentication using strong cryptography.
	FCS_TLSS_EX T.2	This requirement defines the implementation of TLS acting as a server with mutual authentication using strong cryptography.

I.10. Security Functional Requirements Dependencies Analysis

The dependencies between SFRs implemented by the TOE are addressed as follows.

Table 22. SFR Dependencies Rationale for Mandatory SFRs

SFR	Dependencies	Rationale Statement
FAU_GEN.1	FPT_STM.1	FPT_STM.1 included
FAU_GEN.2	FAU_GEN.1, FIA_UID.1	FAU_GEN.1 included, FIA_UID.1 included
FAU_SAR.1	FAU_GEN.1	FAU_GEN.1 included
FAU_SAR.2	FAU_SAR.1	FAU_SAR.1 included
FAU_STG.1	FAU_GEN.1, FTP_ITC.1	FAU_GEN.1 included, FTP_ITC.1 as a secure channel that could be used for export of audit data
FAU_STG.2	FAU_GEN.1	FAU_GEN.1 included
FAU_STG.5	FAU_STG.2, FAU_GEN.1	FAU_STG.2 included, FAU_GEN.1 included
FCS_CKM.1/A KG	FCS_CKM.2 or FCS_COP.1/SigGen, FCS_CKM.6	FCS_CKM.2 and FCS_COP.1/SigGen included, FCS_CKM.6 included

SFR	Dependencies	Rationale Statement
FCS_CKM.1/SKG	[FCS_COP.1/DataEncryption, or FCS_COP.1/StorageEncryption, or FCS_COP.1/KeyWrap, or FCS_COP.1/KeyEnc, or FCS_COP.1/KeyedHash, or FCS_COP.1/CMAC], FCS_CKM.6, FCS_RBG_EXT.1	FCS_COP.1/DataEncryption included, FCS_CKM.6 included, FCS_RBG_EXT.1 included, FCS_COP.1/StorageEncryption and FCS_COP.1/KeyWrap and FCS_COP.1/KeyEnc and FCS_COP.1/KeyedHash and FCS_COP.1/CMAC included as selection-based SFRs
FCS_CKM.2	FCS_CKM.1/AKG, FCS_CKM.6, [if selected: FCS_COP.1/KeyEncap]	FCS_CKM.1/AKG included, FCS_CKM.6 included, FCS_COP.1/KeyEncap included as selection-based SFR
FCS_CKM.6	FCS_CKM.1 or FCS_CKM.5	FCS_CKM.1 included, or FCS_CKM.5 included as selection-based SFR
FCS_COP.1/DataEncryption	FCS_CKM.1/SKG, FCS_CKM.6	FCS_CKM.1/SKG included, FCS_CKM.6 included
FCS_COP.1/SigGen	FCS_CKM.1/AKG, FCS_CKM.6	FCS_CKM.1/AKG included, FCS_CKM.6 included
FCS_COP.1/Hash	None	FCS_COP.1/Hash performs a keyless hashing operation; the key-source and key-destruction dependencies of FCS_COP.1 do not apply.
FCS_RBG_EXT.1	None	
FDP_ACC.1	FDP_ACF.1	FDP_ACF.1 included
FDP_ACF.1	FDP_ACC.1, FMT_MSA.3	FDP_ACC.1 included, FMT_MSA.3 included
FIA_ATD.1	None	
FIA_PMG_EXT.1	None	
FIA_UAU.1	FIA_UID.1	FIA_UID.1 included
FIA_UAU.7	FIA_UAU.1	FIA_UAU.1 included
FIA_UID.1	None	
FIA_USB.1	FIA_ATD.1	FIA_ATD.1 included
FMT_MOF.1	FMT_SMR.1, FMT_SMF.1	FMT_SMR.1 included, FMT_SMF.1 included
FMT_MSA.1	FDP_ACC.1, FMT_SMR.1, FMT_SMF.1	FDP_ACC.1 included, FMT_SMR.1 included, FMT_SMF.1 included

SFR	Dependencies	Rationale Statement
FMT_MSA.3	FMT_MSA.1, FMT_SMR.1	FMT_MSA.1 included, FMT_SMR.1 included
FMT_MTD.1	FMT_SMR.1, FMT_SMF.1	FMT_SMR.1 included, FMT_SMF.1 included
FMT_SMF.1	None	
FMT_SMR.1	FIA_UID.1	FIA_UID.1 included
FPT_SBT_EX T.1	[if selected: FCS_COP.1/Hash], [if selected: FCS_COP.1/SigGen], [if selected: FCS_COP.1/KeyedHash and/or FCS_COP.1/CMAC]	FCS_COP.1/Hash included if selected, FCS_COP.1/SigGen included if selected, FCS_COP.1/KeyedHash and/or FCS_COP.1/CMAC included if selected
FPT_SKP_EX T.1	None	
FPT_STM.1	None	
FPT_TST_EX T.1	None	
FPT_TUD_EX T.1	[if selected: FCS_COP.1/SigGen], [if selected: FIA_X509_EXT.1], [if selected: FCS_COP.1/Hash]	FCS_COP.1/SigGen included if selected, FIA_X509_EXT.1 included if selected, FCS_COP.1/Hash included if selected
FTA_SSL.3	FMT_SMR.1	FMT_SMR.1 included
FTP_ITC.1	FCS_IPSEC_EXT.1, or FCS_TLSC_EXT and/or FCS_TLSS_EXT, or FCS_SSHC_EXT or FCS_SSHS_EXT, or FCS_DTLSC_EXT and/or FCS_DTLSS_EXT, or FCS_HTTPS_EXT.1	FCS_IPSEC_EXT.1 and FCS_TLSC_EXT.1 and FCS_TLSS_EXT.1 and FCS_SSHC_EXT.1 and FCS_SSHS_EXT.1 and FCS_DTLSC_EXT.1 and FCS_DTLSS_EXT.1 and FCS_HTTPS_EXT.1 included as selection-based SFRs
FTP_TRP.1/A dmin	FCS_IPSEC_EXT.1, or FCS_TLSC_EXT and/or FCS_TLSS_EXT, or FCS_SSHC_EXT or FCS_SSHS_EXT, or FCS_DTLSC_EXT and/or FCS_DTLSS_EXT, or FCS_HTTPS_EXT.1	FCS_IPSEC_EXT.1 and FCS_TLSC_EXT.1 and FCS_TLSS_EXT.1 and FCS_SSHC_EXT.1 and FCS_SSHS_EXT.1 and FCS_DTLSC_EXT.1 and FCS_DTLSS_EXT.1 and FCS_HTTPS_EXT.1 included as selection-based SFRs

Table 23. SFR Dependencies Rationale for Selection-Based SFRs

SFR	Dependencies	Rationale Statement
FCS_COP.1/StorageEncryption	FCS_CKM.1/SKG, FCS_CKM.6	FCS_CKM.1/SKG included, FCS_CKM.6 included
FCS_COP.1/KeyEncap	FCS_CKM.1/AKG, FCS_CKM.6	FCS_CKM.1/AKG included, FCS_CKM.6 included

SFR	Dependencies	Rationale Statement
FCS_COP.1/KeyWrap	FCS_CKM.1/SKG, FCS_CKM.6	FCS_CKM.1/SKG included, FCS_CKM.6 included
FCS_COP.1/KeyEnc	FCS_CKM.1/SKG, FCS_CKM.6	FCS_CKM.1/SKG included, FCS_CKM.6 included
FCS_COP.1/KeyTransport	FCS_CKM.1/AKG, FCS_CKM.6	FCS_CKM.1/AKG included, FCS_CKM.6 included
FCS_SMC_EXT.1	FCS_COP.1/Hash	FCS_COP.1/Hash included
FCS_IPSEC_EXT.1	[if selected: FIA_PSK_EXT.1], FCS_CKM.1/AKG, FCS_CKM.2, FCS_COP.1/DataEncryption, FCS_COP.1/SigGen, FCS_COP.1/Hash, [if selected: FCS_COP.1/KeyedHash], FCS_RBG_EXT.1	FCS_CKM.1/AKG included, FCS_CKM.2 included, FCS_COP.1/DataEncryption included, FCS_COP.1/SigGen included, FCS_COP.1/Hash included, FCS_RBG_EXT.1 included, FIA_PSK_EXT.1 included if selected, FCS_COP.1/KeyedHash included if selected
FCS_SSHC_EXT.1	FCS_CKM.1/AKG, FCS_CKM.1/SKG, FCS_CKM.2, FCS_COP.1/DataEncryption, FCS_COP.1/SigGen, FCS_COP.1/Hash, FCS_COP.1/KeyedHash, FCS_RBG_EXT.1	FCS_CKM.1/AKG included, FCS_CKM.1/SKG included, FCS_CKM.2 included, FCS_COP.1/DataEncryption included, FCS_COP.1/SigGen included, FCS_COP.1/Hash included, FCS_RBG_EXT.1 included, FCS_COP.1/KeyedHash included as selection-based SFRs
FCS_SSHS_EXT.1	FCS_CKM.1/AKG, FCS_CKM.2, FCS_COP.1/DataEncryption, FCS_COP.1/SigGen, FCS_COP.1/Hash, FCS_COP.1/KeyedHash, FCS_RBG_EXT.1	FCS_CKM.1/AKG included, FCS_CKM.2 included, FCS_COP.1/DataEncryption included, FCS_COP.1/SigGen included, FCS_COP.1/Hash included, FCS_RBG_EXT.1 included, FCS_COP.1/KeyedHash included as selection-based SFR
FCS_HTTPS_EXT.1	FCS_TLSC_EXT, and/or FCS_TLSS_EXT	FCS_TLSC_EXT.1 and FCS_TLSS_EXT.1 included as selection-based SFRs
FCS_COP.1/KeyedHash	FCS_RBG_EXT.1, FCS_COP.1/Hash, FTP_ITC.1 or FCS_CKM.1/AKG, FCS_CKM.6	FCS_RBG_EXT.1 included, FCS_COP.1/Hash included, FTP_ITC.1 and FCS_CKM.1/AKG included, FCS_CKM.6 included
FIA_PSK_EXT.1	[if selected: FCS_COP.1/Hash], [if selected: FCS_RBG_EXT.1]	FCS_COP.1/Hash included if selected, FCS_RBG_EXT.1 included if selected
FCS_PCC_EXT.1	FCS_COP.1/KeyedHash	FCS_COP.1/KeyedHash included as selection-based SFR
FCS_CKM.5	[if selected: FCS_COP.1/KeyedHash], [if selected: FCS_COP.1/CMAC], FCS_CKM.6, [if selected: FCS_RBG_EXT.1]	FCS_COP.1/KeyedHash included if selected, FCS_COP.1/CMAC included if selected, FCS_CKM.6 included, FCS_RBG_EXT.1 included if selected

SFR	Dependencies	Rationale Statement
FCS_COP.1/C MAC	FCS_CKM.1/SKG, FCS_CKM.6	FCS_CKM.1/SKG included, FCS_CKM.6 included. When FCS_COP.1/CMAC is applied to keys used in FPT_SBT_EXT.1, the cipher-based message authentication key is not CSP, so dependencies on FCS_CKM.1/SKG and FCS_CKM.6 can be removed.
FCS_SNI_EXT .1	FCS_RBG_EXT.1	FCS_RBG_EXT.1 included
FIA_X509_EX T.1	FIA_X509_EXT.2	FIA_X509_EXT.2 included as selection-based SFR
FIA_X509_EX T.2	FIA_X509_EXT.1	FIA_X509_EXT.1 included as selection-based SFR
FIA_X509_EX T.3	FCS_CKM.1/AKG, FIA_X509_EXT.1	FCS_CKM.1/AKG included, FIA_X509_EXT.1 included as selection-based SFR

Table 24. SFR Dependencies Rationale for Conditionally Mandatory SFRs

SFR	Dependencies	Rationale Statement
FPT_KYP_EX T.1	FCS_KYC_EXT.1, [if selected: FCS_COP.1/KeyWrap], [if selected: FCS_COP.1/KeyEnc and/or FCS_COP.1/KeyTransport], [if selected: FCS_SMC_EXT.1]	FCS_KYC_EXT.1 included as conditionally-mandatory SFR, FCS_COP.1/KeyWrap included if selected, FCS_COP.1/KeyEnc included if selected, FCS_COP.1/KeyTransport included if selected, FCS_SMC_EXT.1 included if selected
FCS_KYC_EX T.1	FCS_COP.1/KeyWrap, FCS_SMC_EXT.1, FCS_CKM.6, FCS_COP.1/KeyEnc, FCS_CKM.5, and/or FCS_COP.1/KeyTransport	FCS_CKM.6 included, FCS_COP.1/KeyWrap and FCS_SMC_EXT.1 and FCS_COP.1/KeyEnc and FCS_CKM.5 and FCS_COP.1/KeyTransport included as selection-based SFRs
FDP_DSK_EX T.1	FCS_COP.1/StorageEncryption	FCS_COP.1/StorageEncryption included
FDP_FXS_EX T.1	None	
FTP_TRP.1/N onAdmin	FCS_IPSEC_EXT.1, or FCS_TLSC_EXT and/or FCS_TLSS_EXT, or FCS_SSHC_EXT or FCS_SSHS_EXT, or FCS_DTLSC_EXT and/or FCS_DTLSS_EXT, or FCS_HTTPS_EXT.1	FCS_IPSEC_EXT.1 and FCS_TLSC_EXT.1 and FCS_TLSS_EXT.1 and FCS_SSHC_EXT.1 and FCS_SSHS_EXT.1 and FCS_DTLSC_EXT.1 and FCS_DTLSS_EXT.1 and FCS_HTTPS_EXT.1 included as selection-based SFRs

SFR	Dependencies	Rationale Statement
FIA_AFL.1	FIA_UAU.1	FIA_UAU.1 included

Table 25. SFR Dependencies Rationale for Optional SFRs

SFR	Dependencies	Rationale Statement
FDP_UDU_EX T.1	None	
FPT_WIPE_E XT.1	None	